

# Product World

Finishes · Sealers · Fillers · Oils · Care Products · Adhesives · Tools



Home of Wood Floor Finishing Products since 1926



**Berger-Seidle**®  
*...wood floors deserve the best!*

# TABLE OF CONTENTS


|                                       |           |
|---------------------------------------|-----------|
| <b>Table of Contents</b>              | 3         |
| <b>Products</b>                       | 6 - 95    |
| Adhesive Systems                      | 6 - 13    |
| Abrasives                             | 14 - 33   |
| Water-based Systems                   | 34 - 51   |
| Oil Systems                           | 52 - 65   |
| Solvent-based Systems                 | 66 - 69   |
| Maintenance & Care Systems            | 70 - 77   |
| Sport Floor Systems                   | 78 - 83   |
| Tools & Miscellaneous                 | 84 - 97   |
| <b>Legend</b>                         | 98        |
| <b>Maintenance &amp; Care Guide</b>   | 99        |
| <b>Tables</b>                         | 100 - 103 |
| BergerBond Adhesive Systems           | 100       |
| Combinations of Primers and Adhesives | 100       |
| Surface Treatment Systems             | 101       |
| Skid Resistances                      | 102       |
| Usabuilties of Rollers                | 102       |
| Combinations of Sealers and Finishes  | 103       |
| <b>Alphabetic Product List</b>        | 104 - 105 |

# EXCELLENCE IN WOOD FLOOR FINISHING

BAKA Award  
Preis für  
Produktinnovation  
2019



**SUCCESS | 2019**  
VORSPRUNG DURCH INNOVATION

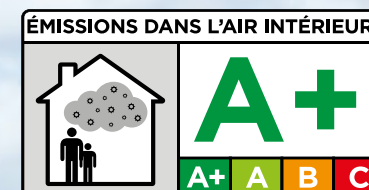

## BERGERBOND

A premium and high-quality wooden floor must be glued securely.

Technical performance with strong adhesion, very good workability and a technically safe installation are essential. This prevents from problems with other materials – short- and long-term.

Health protection for installers as well as owners play a very important and central role. Health issues must be avoided entirely or minimized, depending on the preferred product category.

The BERGERBOND product family represents the premium segment of adhesive technology for parquet and wood floors offering all these benefits. Through systematic test procedures with the matched Berger-Seidle finishing products, additional reliability in the complete system is guaranteed.

The large and highly specialized BERGERBOND product variety offers the right performance solution for every requirement - completely "Made in Germany", including additional, smart problem solvers.

The maximum of environmental friendliness and health protection is additionally proven by comprehensive external certifications such as the EC1 label, the Blue Angel label, the Green Point, fulfillment of the LEED specifications and of course the German Building Certification of DIBT.

A strong foundation for successful installations is assured with our adhesive systems.



# ADHESIVE SYSTEMS



## Primers

| Product                                                                            | Description                                                                                                                                                                                                                                                                                                                       | Shelf Life | Gis-code | Process. / Laying Time | Fit For Further Work | Application / Consumption                                                                                                                                                        | Flash-Off Time / Floor Heating / Art-No.  | Certificates / Approvals                                                                                                                                                | Packaging                                                                                  | Pallet      |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------|
|   | <b>BERGERBOND® PRIMER D</b> is a 1-component primer based on high-quality synthetic resin dispersions. Free of solvents! Specially recommended for priming of heavily absorbing, mineral and wooden subfloors. It is a concentrate and can be diluted 1:3 with water. Approved under all BERGERBOND adhesives.                    | 15 mon.*   | D1       | -                      | see technical data   |  Univers. Roller, 50-100 g/m <sup>2</sup>                                                     | no / yes / YD20-0000-OAL                  |   | 5 kg    | 96 x 5 kg   |
|   | <b>BERGERBOND® PRIMER P</b> is a 1-component primer based on high-quality polyurethane raw materials. Free of water and solvents! Specially recommended for priming BERGERBOND® P2S and BERGERBOND® M1P/M1/M1X. Supports a solid moisture and vapor barrier effect. Suitable for absorbing and non-absorbing subfloors.           | 12 mon.*   | RU1      | -                      | see technical data   |  Univers. Roller, 100-130 g/m <sup>2</sup><br><br>250-300 g/m <sup>2</sup> (moisture barrier) | no / yes / YP20-0000-OAL                  |   | 5,5 kg                                                                                     | 60 x 5,5 kg |
|  | <b>BERGERBOND® PRIMER E</b> is a 2-component primer based on high-quality epoxy-resin raw materials. Free of solvents, saponification-resistant and non-shrinking. Functions as moisture barrier. Specially recommended for priming BERGERBOND® P2S and BERGERBOND® M1P/M1/M1X. Suited for absorbing and non-absorbing subfloors. | 12 mon.*   | RE30     | 20-30 min.**           | 4-8 hrs.**           |  Uno Roller, 300-400 g/m <sup>2</sup>                                                         | no / yes / YE20-0000-OAL<br>YE21-0000-OAL |  R11 acc. Tech. Data Sheet                                                           | 4,5 kg  | 42 x 4,5 kg |

## Adhesives

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Shelf Life | Gis-code | Process. / Laying Time | Fit For Further Work | Application / Consumption                                                                                       | Flash-Off Time / Floor Heating / Art-No.  | Certificates / Approvals                                                                                                                                                                                                                                             | Packaging                                                                                                                  | Pallet                       |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------------------------|
|  | <b>BERGERBOND® P2S</b> is a 2-component adhesive based on high-quality polyurethane raw materials, suited for the fixed gluing of solid wood, mosaic, strip, industrial wood flooring and prefinished wood flooring. Suited also for the gluing of most exotic woods and wood paving RE. Also well suited for the gluing of water-sensitive types of wood such as beech, maple and ash due to being bulge and deforming free. BERGERBOND® P2S is solvent-free, contains no water and is suitable for chair casters. The product provides a long open time. | 12 mon.*   | RU1      | 50-60 min.**           | 12 hrs.**            |  800-1300 g/m <sup>2</sup> | no / yes / YP02-0000-OAL<br>YP05-0000-OAL |                                                                                            | 10 kg<br>6 kg                         | 33 x 10 kg<br>60 x 6 kg      |
|  | <b>BERGERBOND® M1P</b> is a premium SPU hardwood-floor adhesive based on silane terminated polymers, shear strength as per ISO 17178. Suitable for gluing solid wood planks of all measures. Used also for 10 mm solid wood, mosaic parquet, strip flooring and engineered wooden flooring as well as most of the exotic woods and industrial parquet. BERGERBOND® M1P is free of solvents, contains no water and is suitable for chair casters. BERGERBOND® M1P allows form-stable, quick and secure gluing.                                              | 18 mon.*   | RS10     | 30-40 min.**           | 24 hrs.**            |  700-1100 g/m <sup>2</sup> | no / yes / YM03-0000-OAL                  |                                                                                            | 21 kg <br>(3 x 7 kg bag)              | 33 x 21 kg                   |
|  | <b>BERGERBOND® M1X</b> is a 1-component adhesive based on silane-modified polyurethane raw materials; elastic. Per DIN EN 14293 this adhesive is suited for the non-tension gluing of 2-layer and 3-layer prefinished hardwood flooring. BERGERBOND® M1X is solvent-free, contains no water and is suitable for chair casters. BERGERBOND® M1X allows for lossfree, quick and safe gluing.                                                                                                                                                                 | 18 mon.*   | RS10     | 25-35 min.**           | 12 hrs.**            |  900-1400 g/m <sup>2</sup> | no / yes / YM06-0000-OAL                  |  <br> | 21 kg<br>(3 x 7 kg bag)<br><br>17 kg  | 36 x 21 kg<br><br>33 x 17 kg |

# ADHESIVE SYSTEMS



## Adhesives



| Product | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | <p><b>BERGERBOND® M1</b> is a SMP hardwood-floor adhesive, with a wide and excellent range of application, featuring of high-quality silane-modified polyurethane raw materials; hardelastic. Per DIN EN 14293 this adhesive is suited for the non-tension gluing of solid wood and solid wood planks, mosaic, strip and prefinished wood flooring. Suits also for the gluing of most exotic woods and industrial wood flooring. BERGERBOND® M1 is solvent-free, contains no water and is suitable for chair casters. BERGERBOND® M1P allows form-stable, quick and secure gluing.</p> <p>We recommend the <b>BERGERTOOL APPLICATIONGUN L</b> for processing the 925g sausages. More information on page 85.</p> <p><b>BERGERBOND® M1U UP</b> 1-component SMP adhesive sealant based on high-quality silane-terminated polymers. BERGERBOND® M1U UP is recommended for bonding concrete, metals, PVC, ceramics, glass, epoxy resin, polyester and wood. Suitable for bonding skirting boards, baseboards and decorative strips. Excellent adhesion, even on slightly wet surfaces. It is solvent-free, water-free and free from interactions with Berger-Seidle® finishing systems - and has very low emissions overall at EC1 level. BERGERBOND® M1U UP is also characterized by very high adhesive power, fast initial adhesion and strong, rapid curing. With BERGERBOND® M1U UP, shrinkage-free, fast, hard-elastic and secure bonding is possible.</p> <p><b>BERGERBOND® D1U</b> is a low-emission 1-component dispersion glue for universal gluing of PVC flooring, CV flooring, design flooring, linoleum, resin (max. 3.5 mm thick) and textile flooring.</p> |

| Shelf Life | Gis-code | Process. / Laying Time | Fit For Further Work                   | Application / Consumption                                                                          | Flash-Off Time / Floor Heating / Art-No. | Certificates / Approvals                                                                                                                                                                                                                                          | Packaging                                                                                   | Pallet       |
|------------|----------|------------------------|----------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------|
| 18 mon.*   | RS10     | 25-35 min.**           | 12 hrs.**                              |  800-1300 g/m²  | no / yes / YM05-0000-OAL                 |          | 21 kg<br>(3 x 7 kg bag)                                                                     | 33 x 21 kg   |
|            |          |                        |                                        |                                                                                                    |                                          |                                                                                                                                                                                                                                                                   | 17 kg    | 33 x 17 kg   |
|            |          |                        |                                        |                                                                                                    |                                          |                                                                                                                                                                                                                                                                   | 19,5 kg<br>(20 x 1040 g sausages)                                                           | 40 x 19,5 kg |
| 18 mon.*   | RS10     | 15 min.**              | 24 hrs.**                              | dependent                                                                                          | no / yes / YM10-0000-OAL                 |                                                                                                                                                                               | 12x9,81 us fl oz                                                                            | 1152         |
| 12 mon.*   | D1       | 20 min.**              | 24-48 hrs.**<br>Depending on flooring! |  300-500 g/m² | 0-15 Min. / yes / YD02-0000-OAL          |    | 14 kg  | 33 x 14 kg   |



# ADHESIVE SYSTEMS



## Special Products

| Product                                                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Shelf Life | Gis-code | Process. / Laying Time               | Fit For Further Work                 | Application / Consumption                                                           | Flash-Off Time / Floor Heating / Art-No.                   | Certificates / Approvals                                                            | Packaging                                                                                  | Pallet    |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|--------------------------------------|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------|
|  | <b>BERGERBOND® COLORADD P</b> is a special paste for coloration of the hardwood-floor adhesives BERGERBOND® M1P, M1, M1X, P1 as well as P2S. As the paste can be admixed flexibly the desired color shade can be adapted to the respective wood lot directly at the construction site. Especially in the case of dark wood species, this way white joints caused by white adhesive, can be avoided. The dosing is easily done with the help of the measuring cup fitted within the can cap. The paste solution offers the additional advantage, that there is no need to additionally store dark adhesives.                                                                                                                                                                                                                                 | 12 mon.*   | -        | same as with the respective adhesive | same as with the respective adhesive | 2-5 g/kg                                                                            | same as with the respective adhesive / yes / YP06-8017-0AL |  | 500 ml  | -         |
|  | <b>BERGERBOND® P2 RAPIDREPAIR</b> is a 2-component repair adhesive based on high-quality polyurethane raw materials, suited for the fixed gluing of solid wood flooring, mosaic flooring, strip flooring, industrial wood flooring and prefinished wood flooring. Great for repairs as adhesion is quick and strong. Thus, it is the ideal solution for repairing small areas and securing installation starter rows. Furthermore, it can be used as a gap filler of floor screed gaps, when pretreatment is done professionally. Suited also for the gluing of most exotic woods and wood paving RE. Best suited also for the gluing of water-sensitive types of wood such as beech, maple and ash due to being bulge and deforming free. BERGERBOND® P2 RAPIDREPAIR is solvent-free, contains no water and is suitable for chair casters. | 12 mon.*   | RU1      | 10-15 min.**                         | -                                    |  | no / yes / YP10-0000-0AL<br>YP11-0000-0AL                  |  | 0,9 kg  | 280x0,9kg |



# ABRASIVES



## ABRAPRIME

Proper sanding is crucial for a perfect finished result.

In order to achieve top level results, the technician simply needs reliable and safe work equipment, including "abrasives".

With the ABRAPRIME LINE, Berger-Seidle offers from a single source all required abrasives for varied tasks and machines in multiple categories. A wide selection is available in different categories and price points, from corundum, zircon, ceramic, silicon carbide to nylon polishing pads.

From common tasks to special projects, the ABRAPRIME lineup has you covered with belts, rolls, disks, velcro backed disks, screens and pads. Special perforations are also possible on request.

Proper sanding for every wood floor.



# SANDING OF SURFACES



## Ceramic 3M Cubitron: Simply the Best


- + Outstanding quality with precision ceramic grain
- + Up to 10 times more durable compared to corundum with extremely hard grain and self-sharpening
- + Cool running, sharp cut
- + Precision grain eliminates one sanding pass
- + Aggressive stock removal even with the hardest materials
- + Power Y web for effective grinding and high self-sharpening effect
- + Grain: Cubitron II ceramic grain



Material science:  
The ceramic grain is a sintered grain with excellent hardness and toughness. It is therefore mainly used in metal grinding. In the finished sintered form, like here, the micro-fine structure breaks into smaller parts and shows an outstanding cutting and grinding power.

| Product | Description                                 | Piece/VE | Art.-No.       |
|---------|---------------------------------------------|----------|----------------|
|         | <b>ABRAPRIME BELT ABRASIVES</b>             |          |                |
|         | <b>750 x 200 mm 3M Cubitron II</b>          |          |                |
|         | 750 x 200mm Grit 36                         | 5        | 1350 1032 A00A |
|         | 750 x 200mm Grit 50                         | 5        | 1350 1052 A00A |
|         | 750 x 200mm Grit 60                         | 5        | 1350 1062 A00A |
|         | 750 x 200mm Grit 80                         | 5        | 1350 1082 A00A |
|         | 750 x 200mm Grit 120                        | 5        | 1350 1122 A00A |
|         | <b>ABRAPRIME DISC ABRASIVES</b>             |          |                |
|         | <b>Ø 200 mm 3M 900DZ Cubitron II</b>        |          |                |
|         | Ø 200 mm Grit 40                            | 50       | 1334 4049 A00A |
|         | <b>Ø 200 mm 3M 950U Cubitron II</b>         |          |                |
|         | Ø 200 mm Grit 60                            | 50       | 1334 4069 A00A |
|         | <b>Ø 180 mm 3M 900DZ Cubitron II</b>        |          |                |
|         | Ø 180 mm Grit 40                            | 50       | 1338 0049 A00A |
|         | <b>Ø 180 mm 3M 950U Cubitron II</b>         |          |                |
|         | Ø 180 mm Grit 60                            | 50       | 1338 0069 A00A |
|         | Ø 180 mm Grit 80                            | 50       | 1338 0089 A00A |
|         | <b>Ø 150 mm 3M 900DZ Cubitron II</b>        |          |                |
|         | Ø 150 mm Grit 40                            | 50       | 1335 1049 A00A |
|         | <b>Ø 150 mm 3M 950U Cubitron II</b>         |          |                |
|         | Ø 150 mm Grit 60                            | 50       | 1335 3065 A00A |
|         | Ø 150 mm Grit 80                            | 50       | 1335 308M A00A |
|         | <b>Ø 150 mm 3M Cubitron 950U II 17 Loch</b> |          |                |
|         | Ø 150 mm Grit 60                            | 50       | 1335 5063 A00A |
|         | Ø 150 mm Grit 80                            | 50       | 1335 5083 A00A |
|         | Ø 150 mm Grit 120                           | 50       | 1335 5123 A00A |
|         | Ø 150 mm Grit 150                           | 50       | 1335 5153 A00A |

| Product | Description                                   | Piece/VE | Art.-No.       |
|---------|-----------------------------------------------|----------|----------------|
|         | <b>Ø 150 mm 3M 775L Cubitron II Multiloch</b> |          |                |
|         | Ø 150 mm Grit 80                              | 50       | 1335 3085 A00A |
|         | Ø 150 mm Grit 120                             | 50       | 1335 3125 A00A |
|         | Ø 150 mm Grit 150                             | 50       | 1335 3155 A00A |
|         | Ø 150 mm Grit 180                             | 50       | 1335 3189 A00A |
|         | Ø 150 mm Grit 220                             | 50       | 1335 3228 A00A |
|         | Ø 150 mm Grit 240                             | 50       | 1335 3248 A00A |
|         | Ø 150 mm Grit 320                             | 50       | 1335 3325 A00A |
|         | Ø 150 mm Grit 400                             | 50       | 1335 3409 A00A |
|         | <b>Ø 140 mm 3M 900DZ Cubitron II</b>          |          |                |
|         | Ø 140 mm Grit 40                              | 50       | 1331 3049 A00A |
|         | <b>Ø 140 mm 3M 950U Cubitron II</b>           |          |                |
|         | Ø 140 mm Grit 60                              | 50       | 1331 3065 A00A |
|         | Ø 140 mm Grit 80                              | 50       | 1331 3085 A00A |
|         | Ø 140 mm Grit 120                             | 50       | 1331 3125 A00A |
|         | <b>Ø 115 mm 3M 900DZ Cubitron II</b>          |          |                |
|         | Ø 115 mm Grit 40                              | 50       | 1335 0049 A00A |
|         | <b>Ø 115 mm 3M 950U Cubitron II</b>           |          |                |
|         | Ø 115 mm Grit 60                              | 50       | 1335 0072 A00A |
|         | Ø 115 mm Grit 80                              | 50       | 1335 0092 A00A |
|         | Ø 115 mm Grit 120                             | 50       | 1335 0132 A00A |

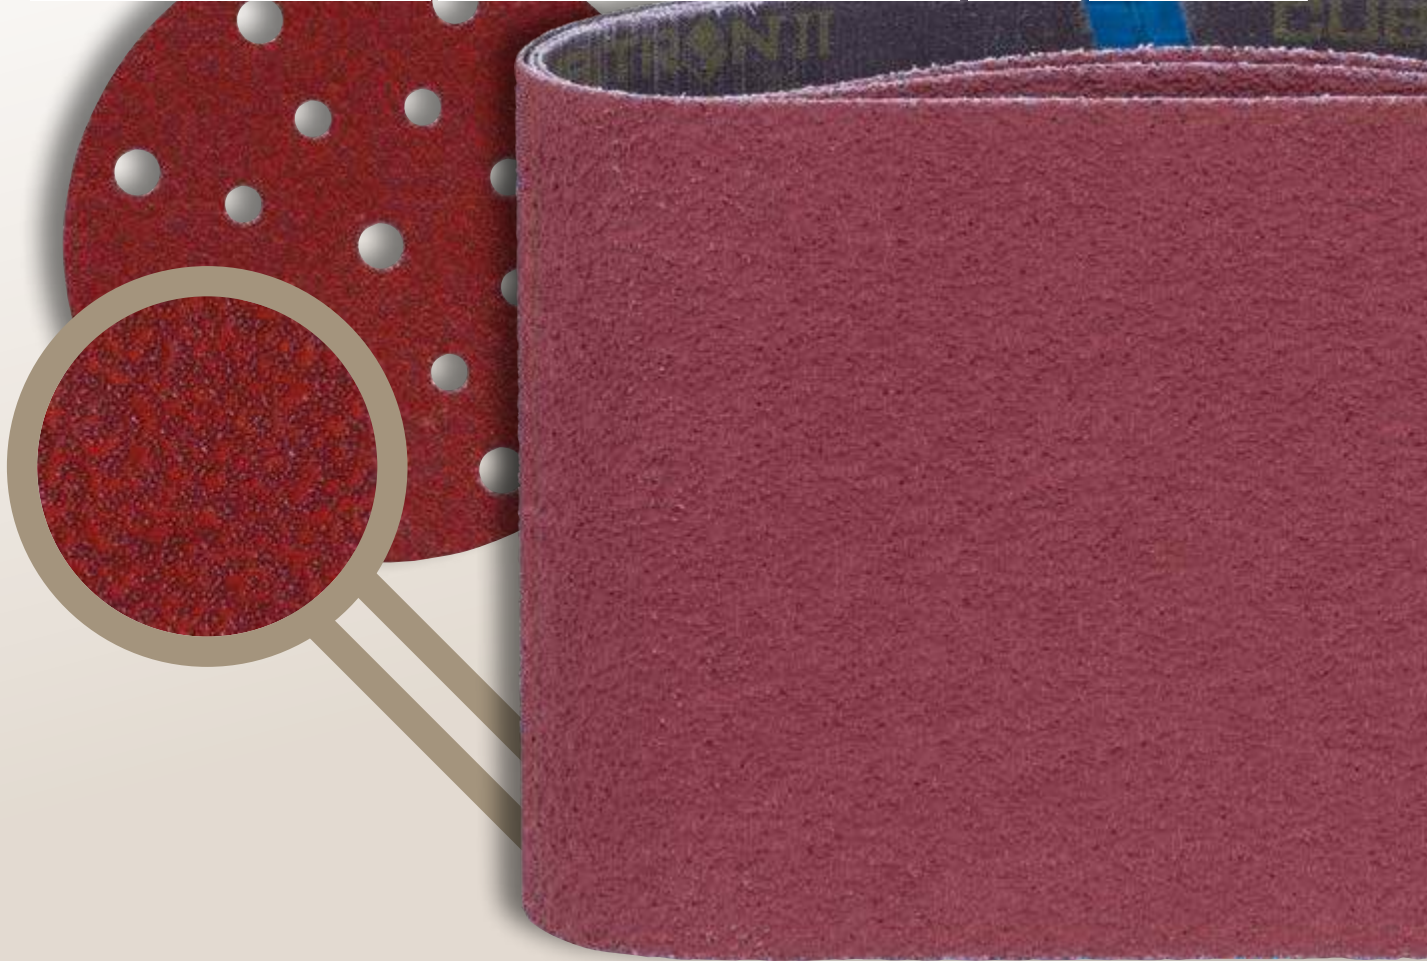

# SANDING OF SURFACES



## Zircon: The Extra Sharp Top Runner

- + Premium quality with a very sharp zirconium grain
- + Very good price-performance ratio with high efficiency
- + 4-5 times higher durability compared to corundum due to hard grain and self-sharpening effect
- + Cool grinding and quick removal
- + Power Y web for effective grinding and high self-sharpening effect
- + Grain: zirconium



Material science:  
The zirconium is a mineral of the class zirconium silicate. Zircon is one of the earliest mineral formations on earth. The oldest known zircon crystals are up to 4.4 billion years old. It is a grain that is also suitable for stainless steels, which, thanks to its excellent cutting behavior, allows less temperature to be generated. The grain is finer in structure than corundum.

### Product



### Description

#### Ø 150 mm Zircon

- Ø 150 mm Grit 24
- Ø 150 mm Grit 36
- Ø 150 mm Grit 40
- Ø 150 mm Grit 60
- Ø 150 mm Grit 80
- Ø 150 mm Grit 100
- Ø 150 mm Grit 120

### Piece/VE Art.-No.

|    |                |
|----|----------------|
| 25 | 1335 1025 A00A |
| 25 | 1335 1035 A00A |
| 25 | 1335 1045 A00A |
| 50 | 1335 1065 A00A |
| 50 | 1335 1085 A00A |
| 50 | 1335 1105 A00A |
| 50 | 1335 1125 A00A |

#### Ø 140 mm Zircon

- Ø 140 mm Grit 24
- Ø 140 mm Grit 36
- Ø 140 mm Grit 40
- Ø 140 mm Grit 60
- Ø 140 mm Grit 80
- Ø 140 mm Grit 100
- Ø 140 mm Grit 120

|    |                |
|----|----------------|
| 25 | 1331 3025 A00A |
| 25 | 1331 3036 A00A |
| 25 | 1331 3041 A00A |
| 50 | 1331 3061 A00A |
| 50 | 1331 3081 A00A |
| 50 | 1331 3101 A00A |
| 50 | 1331 3121 A00A |

### Product



### Description

#### ABRAPRIME BELT ABRASIVES

##### 750 x 200 mm Zircon

- 750 x 200mm Grit 24
- 750 x 200mm Grit 36
- 750 x 200mm Grit 40
- 750 x 200mm Grit 50
- 750 x 200mm Grit 60
- 750 x 200mm Grit 80
- 750 x 200mm Grit 100
- 750 x 200mm Grit 120

### Piece/VE

### Art.-No.

|    |                |
|----|----------------|
| 5  | 1350 5023 A00A |
| 5  | 1350 5033 A00A |
| 5  | 1350 5043 A00A |
| 10 | 1350 5050 A00A |
| 10 | 1350 5063 A00A |
| 10 | 1350 5083 A00A |
| 10 | 1350 5103 A00A |
| 10 | 1350 5123 A00A |

#### ABRAPRIME DISC ABRASIVES

##### Ø 200 mm Zircon


- Ø 200 mm Grit 24
- Ø 200 mm Grit 36
- Ø 200 mm Grit 40
- Ø 200 mm Grit 60
- Ø 200 mm Grit 80
- Ø 200 mm Grit 100
- Ø 200 mm Grit 120

|    |                |
|----|----------------|
| 25 | 1333 4025 A00A |
| 25 | 1333 4035 A00A |
| 25 | 1333 4045 A00A |
| 25 | 1333 4065 A00A |
| 50 | 1333 4085 A00A |
| 50 | 1333 4105 A00A |
| 50 | 1333 4125 A00A |

##### Ø 180 mm Zircon

- Ø 180 mm Grit 24
- Ø 180 mm Grit 36
- Ø 180 mm Grit 40
- Ø 180 mm Grit 60
- Ø 180 mm Grit 80
- Ø 180 mm Grit 100
- Ø 180 mm Grit 120

|    |                |
|----|----------------|
| 25 | 1338 0028 A00A |
| 25 | 1338 0035 A00A |
| 25 | 1338 0045 A00A |
| 25 | 1338 0065 A00A |
| 50 | 1338 0085 A00A |
| 50 | 1338 0105 A00A |
| 50 | 1338 0125 A00A |

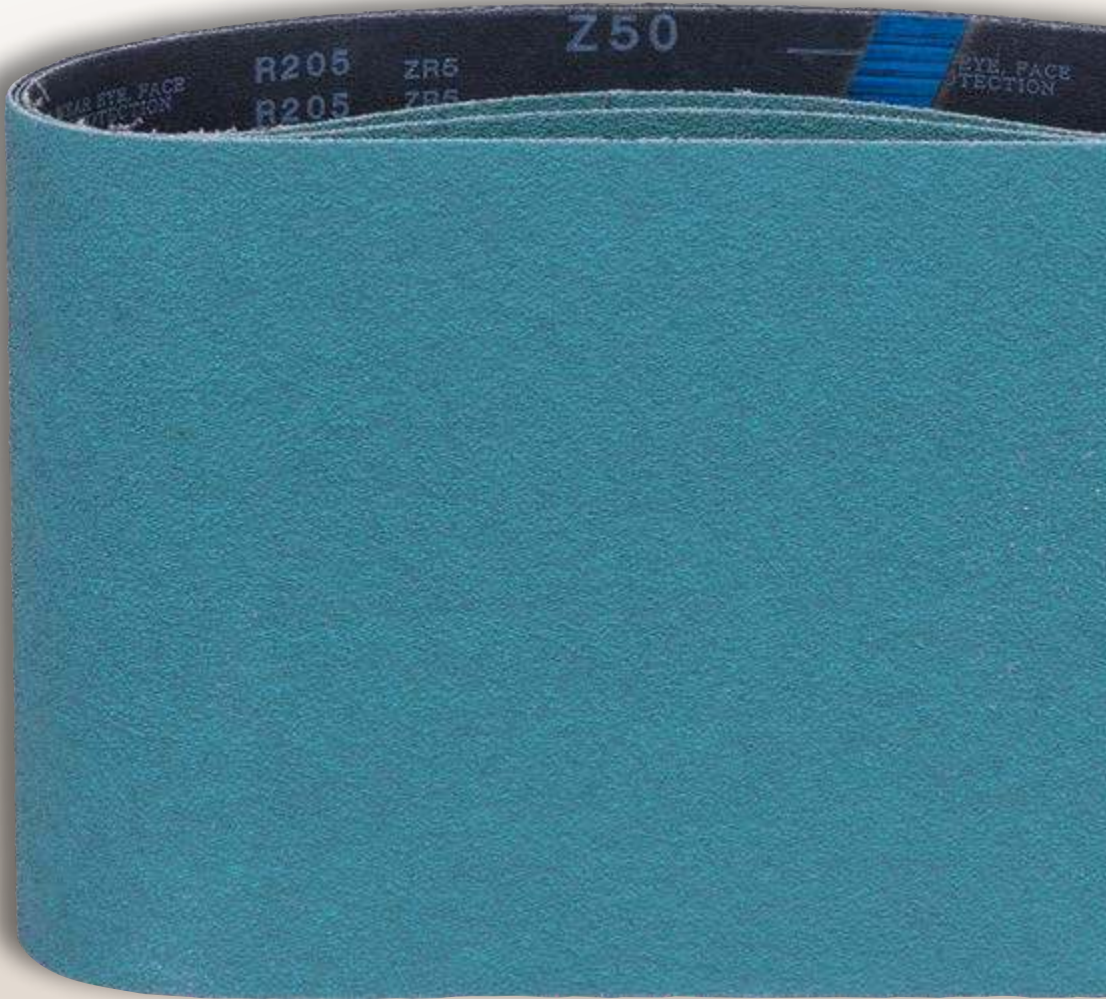

# SANDING OF SURFACES




## Zirconia Alumina: The Universal Wood Floor Hero

- + High universal quality with aggressive grain
- + Triple durability compared to corundum by self-sharpening effect
- + Stable X web
- + Grain: zirconium corundum



Materials science:  
The zirconium corundum combines the listed advantages of the materials corundum and zirconium.

| Product                                                                             | Description                          | Piece/VE | Art.-No.       |
|-------------------------------------------------------------------------------------|--------------------------------------|----------|----------------|
|   | <b>ABRAPRIME BELT ABRASIVES</b>      |          |                |
|                                                                                     | <b>750 x 200 mm Zirconia Alumina</b> |          |                |
|                                                                                     | 750 x 200mm Grit 24                  | 5        | 1350 4026 A00A |
|                                                                                     | 750 x 200mm Grit 36                  | 10       | 1350 4038 A00A |
|                                                                                     | 750 x 200mm Grit 40                  | 10       | 1350 4042 A00A |
|                                                                                     | 750 x 200mm Grit 60                  | 10       | 1350 4062 A00A |
|                                                                                     | 750 x 200mm Grit 80                  | 10       | 1350 4082 A00A |
|                                                                                     | 750 x 200mm Grit 100                 | 10       | 1350 4102 A00A |
|                                                                                     | 750 x 200mm Grit 120                 | 10       | 1350 4122 A00A |
|  | <b>750 x 250 mm Zirconia Alumina</b> |          |                |
|                                                                                     | 750 x 250 mm Grit 24                 | 10       | 1350 1031 A00A |
|                                                                                     | 750 x 250 mm Grit 36                 | 10       | 1350 1035 A00A |
|                                                                                     | 750 x 250 mm Grit 40                 | 10       | 1350 1049 A00A |
|                                                                                     | 750 x 250 mm Grit 60                 | 10       | 1350 1069 A00A |
|                                                                                     | 750 x 250 mm Grit 80                 | 10       | 1350 1089 A00A |
|                                                                                     | 750 x 250 mm Grit 100                | 10       | 1350 1109 A00A |
|                                                                                     | 750 x 250 mm Grit 120                | 10       | 1350 1127 A00A |
|  | <b>550 x 200 mm Zirconia Alumina</b> |          |                |
|                                                                                     | 550 x 200 mm Grit 24                 | 10       | 1350 4022 A00A |
|                                                                                     | 550 x 200 mm Grit 36                 | 10       | 1350 4032 A00A |
|                                                                                     | 550 x 200 mm Grit 40                 | 10       | 1350 4043 A00A |
|                                                                                     | 550 x 200 mm Grit 60                 | 10       | 1350 4063 A00A |
|                                                                                     | 550 x 200 mm Grit 80                 | 10       | 1350 4083 A00A |
|                                                                                     | 550 x 200 mm Grit 100                | 10       | 1350 4103 A00A |
|                                                                                     | 550 x 200 mm Grit 120                | 10       | 1350 4123 A00A |

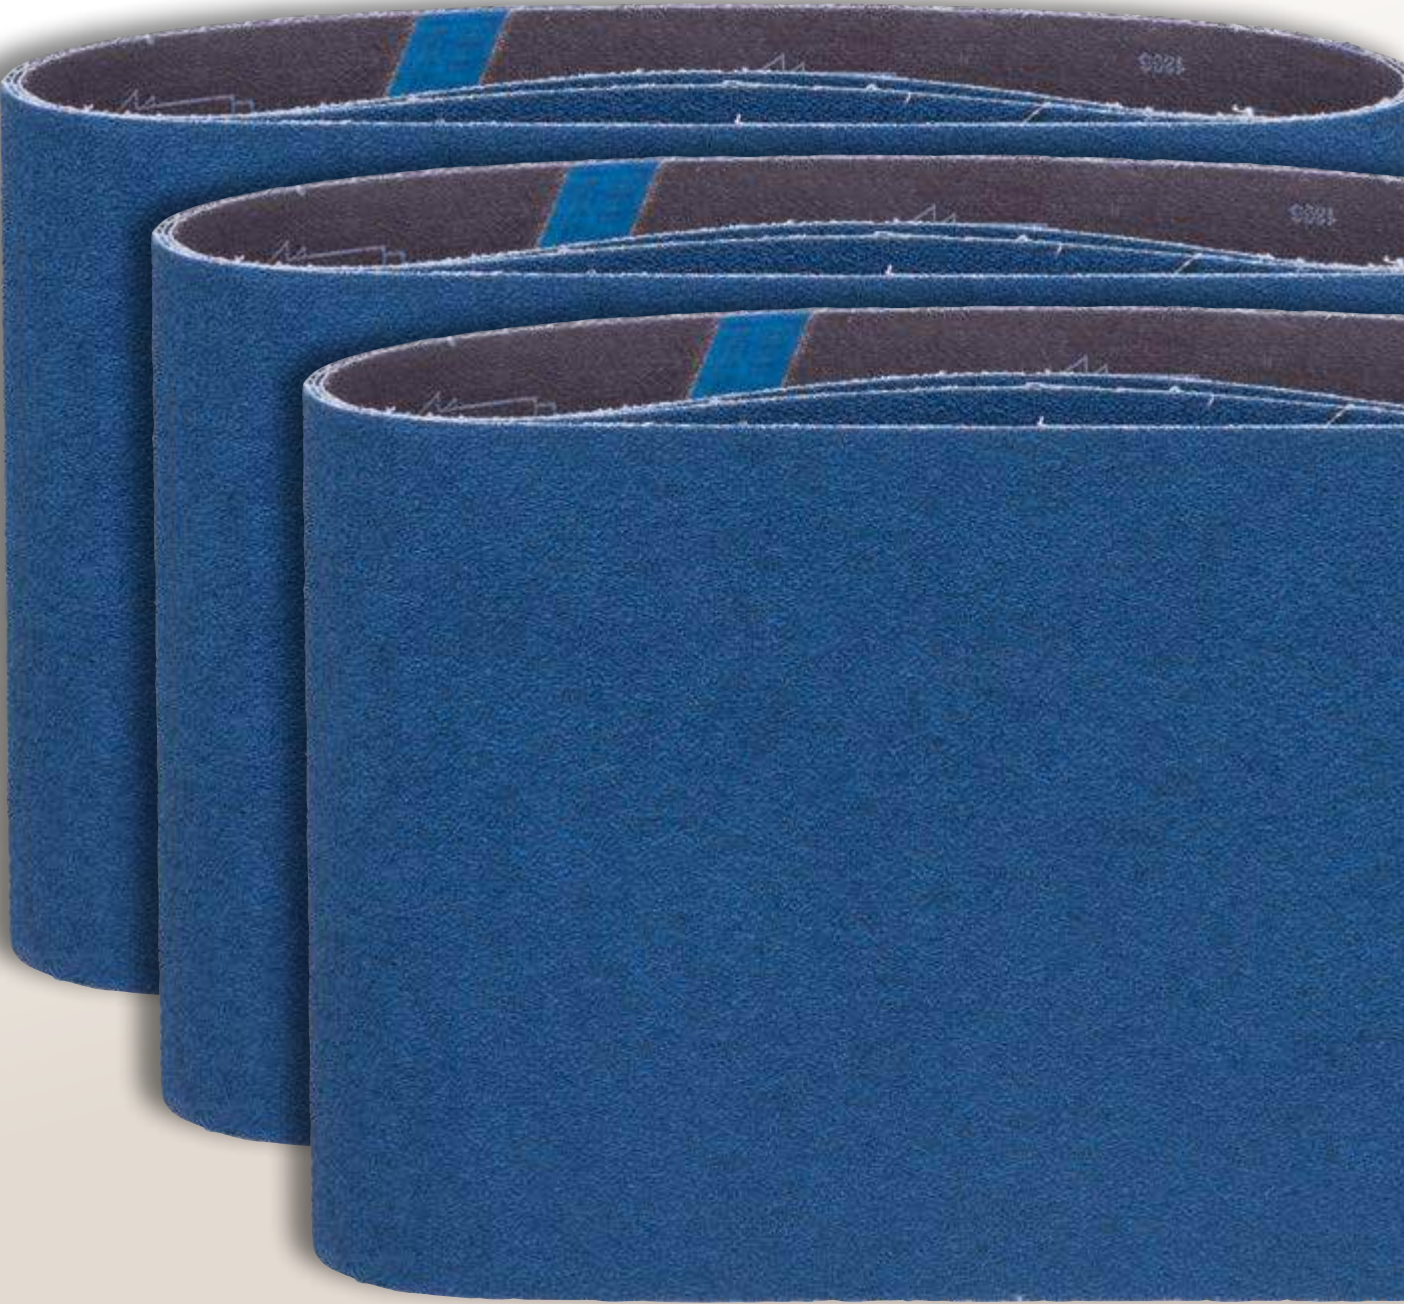


# SANDING OF SURFACES



## Corundum: The Price-Performance Star

- + Standard quality for normal requirements
- + Very good price quality ratio
- + Stable X web
- + Grain: aluminum oxide

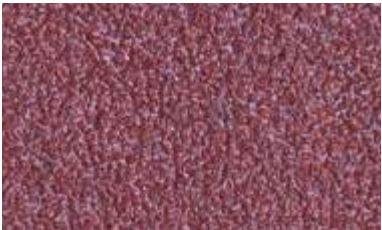

Material science:  
The corundum grain consists of aluminum oxide and is manufactured chemically. It does not contain any traces of iron, which could lead to reactions with the material to be ground. This tough, round grain is usually used for wood, spatula, filler and soft metals.

| Product                                                                             | Description                      | Piece/VE | Art.-No.       |
|-------------------------------------------------------------------------------------|----------------------------------|----------|----------------|
|   | <b>ABRAPRIME BELT ABRASIVES</b>  |          |                |
|                                                                                     | <b>750 x 200 mm Corundum</b>     |          |                |
|                                                                                     | 750 x 200mm Grit 16              | 5        | 1350 1019 A00A |
|                                                                                     | 750 x 200mm Grit 24              | 10       | 1350 4024 A00A |
|                                                                                     | 750 x 200mm Grit 36              | 10       | 1350 4036 A00A |
|                                                                                     | 750 x 200mm Grit 40              | 10       | 1350 4040 A00A |
|                                                                                     | 750 x 200mm Grit 60              | 10       | 1350 4060 A00A |
|                                                                                     | 750 x 200mm Grit 80              | 10       | 1350 4080 A00A |
|                                                                                     | 750 x 200mm Grit 100             | 10       | 1350 4100 A00A |
|                                                                                     | 750 x 200mm Grit 120             | 10       | 1350 4120 A00A |
|  | <b>550 x 200 mm Corundum</b>     |          |                |
|                                                                                     | 550 x 200 mm Grit 24             | 10       | 1350 4021 A00A |
|                                                                                     | 550 x 200 mm Grit 36             | 10       | 1350 4031 A00A |
|                                                                                     | 550 x 200 mm Grit 40             | 10       | 1350 4041 A00A |
|                                                                                     | 550 x 200 mm Grit 60             | 10       | 1350 4061 A00A |
|                                                                                     | 550 x 200 mm Grit 80             | 10       | 1350 4081 A00A |
|                                                                                     | 550 x 200 mm Grit 100            | 10       | 1350 4101 A00A |
|                                                                                     | 550 x 200 mm Grit 120            | 10       | 1350 4121 A00A |
|  | <b>ABRAPRIME ROLL ABRASIVES</b>  |          |                |
|                                                                                     | <b>25/50 m x 200 mm Corundum</b> |          |                |
|                                                                                     | 25 m x 200 mm Grit 16            | 1        | 1342 0016 A00A |
|                                                                                     | 50 m x 200 mm Grit 24            | 1        | 1342 0027 A00A |
|                                                                                     | 50 m x 200 mm Grit 36            | 1        | 1342 0037 A00A |
|                                                                                     | 50 m x 200 mm Grit 40            | 1        | 1342 0043 A00A |
|                                                                                     | 50 m x 200 mm Grit 50            | 1        | 1342 0053 A00A |
|                                                                                     | 50 m x 200 mm Grit 60            | 1        | 1342 0063 A00A |
|                                                                                     | 50 m x 200 mm Grit 80            | 1        | 1342 0083 A00A |
|                                                                                     | 50 m x 200 mm Grit 100           | 1        | 1342 0103 A00A |
|                                                                                     | 50 m x 200 mm Grit 120           | 1        | 1342 0123 A00A |
|                                                                                     | 50 m x 200 mm Grit 150           | 1        | 1342 0150 A00A |

### Product



### Description

#### ABRAPRIME DISC ABRASIVES

##### Ø 200 mm Corundum

|                   |    |                |
|-------------------|----|----------------|
| Ø 200 mm Grit 16  | 25 | 1333 4016 A00A |
| Ø 200 mm Grit 24  | 25 | 1333 4024 A00A |
| Ø 200 mm Grit 36  | 50 | 1333 4036 A00A |
| Ø 200 mm Grit 40  | 50 | 1333 4040 A00A |
| Ø 200 mm Grit 60  | 50 | 1333 4060 A00A |
| Ø 200 mm Grit 80  | 50 | 1333 4080 A00A |
| Ø 200 mm Grit 100 | 50 | 1333 4100 A00A |
| Ø 200 mm Grit 120 | 50 | 1333 4120 A00A |

##### Ø 180 mm Corundum

|                   |    |                |
|-------------------|----|----------------|
| Ø 180 mm Grit 16  | 25 | 1338 0016 A00A |
| Ø 180 mm Grit 24  | 25 | 1338 0024 A00A |
| Ø 180 mm Grit 40  | 25 | 1338 0040 A00A |
| Ø 180 mm Grit 60  | 50 | 1338 0060 A00A |
| Ø 180 mm Grit 80  | 50 | 1338 0080 A00A |
| Ø 180 mm Grit 100 | 50 | 1338 0100 A00A |
| Ø 180 mm Grit 120 | 50 | 1338 0120 A00A |

##### Ø 150 mm Corundum

|                   |     |                |
|-------------------|-----|----------------|
| Ø 150 mm Grit 16  | 25  | 1335 1016 A00A |
| Ø 150 mm Grit 24  | 25  | 1335 1024 A00A |
| Ø 150 mm Grit 40  | 50  | 1335 1040 A00A |
| Ø 150 mm Grit 60  | 50  | 1335 1060 A00A |
| Ø 150 mm Grit 80  | 50  | 1335 1080 A00A |
| Ø 150 mm Grit 100 | 50  | 1335 1100 A00A |
| Ø 150 mm Grit 120 | 100 | 1335 1120 A00A |
| Ø 150 mm Grit 150 | 100 | 1335 1150 A00A |
| Ø 150 mm Grit 180 | 100 | 1335 1180 A00A |

#### ABRAPRIME DISC ABRASIVES

##### PERFORATED CENTER MOUNT

##### Ø 180 mm Corundum

|                   |     |                |
|-------------------|-----|----------------|
| Ø 180 mm Grit 16  | 25  | 1331 8016 A00A |
| Ø 180 mm Grit 24  | 50  | 1341 8029 A00A |
| Ø 180 mm Grit 36  | 50  | 1341 8039 A00A |
| Ø 180 mm Grit 40  | 50  | 1341 8049 A00A |
| Ø 180 mm Grit 60  | 50  | 1341 8069 A00A |
| Ø 180 mm Grit 80  | 50  | 1341 8089 A00A |
| Ø 180 mm Grit 100 | 100 | 1341 8109 A00A |
| Ø 180 mm Grit 120 | 100 | 1341 8129 A00A |

##### Ø 150 mm Corundum


|                   |     |                |
|-------------------|-----|----------------|
| Ø 150 mm Grit 16  | 25  | 1331 9016 A00A |
| Ø 150 mm Grit 24  | 50  | 1341 5029 A00A |
| Ø 150 mm Grit 36  | 50  | 1341 5039 A00A |
| Ø 150 mm Grit 40  | 50  | 1341 5049 A00A |
| Ø 150 mm Grit 60  | 50  | 1341 5069 A00A |
| Ø 150 mm Grit 80  | 50  | 1341 5089 A00A |
| Ø 150 mm Grit 100 | 100 | 1341 5109 A00A |
| Ø 150 mm Grit 120 | 100 | 1341 5129 A00A |

# STAIRS, CORNERS AND OTHERS



| Product | Description                                                        | Piece/VE | Art.-No.       |
|---------|--------------------------------------------------------------------|----------|----------------|
|         | <b>ABRAPRIME DISC ABRASIVES</b>                                    |          |                |
|         | <b>Ø 150 mm 3M Cubitron II 17 Loch</b>                             |          |                |
|         | Ø 150 mm Grit 60                                                   | 50       | 1335 5063 A00A |
|         | Ø 150 mm Grit 80                                                   | 50       | 1335 5083 A00A |
|         | Ø 150 mm Grit 120                                                  | 50       | 1335 5123 A00A |
|         | Ø 150 mm Grit 150                                                  | 50       | 1335 5153 A00A |
|         | <b>Ø 115 mm 3M Cubitron II</b>                                     |          |                |
|         | Ø 115 mm Grit 60                                                   | 50       | 1335 0072 A00A |
|         | Ø 115 mm Grit 80                                                   | 50       | 1335 0092 A00A |
|         | Ø 115 mm Grit 120                                                  | 50       | 1335 0132 A00A |
|         | <b>Ø 115 mm Corundum</b>                                           |          |                |
|         | Ø 115 mm Grit 24                                                   | 50       | 1335 0024 A00A |
|         | Ø 115 mm Grit 40                                                   | 50       | 1335 0040 A00A |
|         | Ø 115 mm Grit 60                                                   | 50       | 1335 0060 A00A |
|         | Ø 115 mm Grit 80                                                   | 50       | 1335 0080 A00A |
|         | Ø 115 mm Grit 100                                                  | 50       | 1335 0100 A00A |
|         | Ø 115 mm Grit 120                                                  | 50       | 1335 0120 A00A |
|         | <b>Ø 90 mm Corundum (perforated for FESTOOL)</b>                   |          |                |
|         | Ø 90 mm Grit 40                                                    | 50       | 1335 0041 A00A |
|         | Ø 90 mm Grit 60                                                    | 50       | 1335 0061 A00A |
|         | Ø 90 mm Grit 80                                                    | 50       | 1335 0081 A00A |
|         | Ø 90 mm Grit 100                                                   | 50       | 1335 0101 A00A |
|         | Ø 90 mm Grit 120                                                   | 50       | 1335 0121 A00A |
|         | <b>DELTA-Abrasives Zircon (for FEIN Delta Sanding Machines)</b>    |          |                |
|         | Grit 40                                                            | 100      | 1331 1043 A00A |
|         | Grit 60                                                            | 100      | 1331 1063 A00A |
|         | Grit 80                                                            | 100      | 1331 1083 A00A |
|         | <b>DELTA-Abrasives Zircon (for FESTOOL Delta Sanding Machines)</b> |          |                |
|         | Grit 40                                                            | 100      | 1331 5041 A00A |
|         | Grit 60                                                            | 100      | 1331 5061 A00A |
|         | Grit 80                                                            | 100      | 1331 5081 A00A |
|         | <b>ABRAPRIME SPECIALS</b>                                          |          |                |
|         | Velcro nog plate red 115mm x M14                                   | 1        | 1 3974 A00A    |
|         | Hermes Multiflowpad 150mm                                          | 1        | 13 3064 A00A   |

| Product | Description                            | Piece/VE | Art.-No.       |
|---------|----------------------------------------|----------|----------------|
|         | <b>ABRAPRIME DISC DOUBLE ABRASIVES</b> |          |                |
|         | <b>Ø 410 mm Silicon Carbide</b>        |          |                |
|         | Ø 410 x 25 mm Grit 16                  | 5        | 1349 9016 A00A |
|         | Ø 410 x 25 mm Grit 24                  | 10       | 1349 9024 A00A |
|         | Ø 410 x 25 mm Grit 40                  | 10       | 1349 9040 A00A |
|         | <b>Ø 375 mm Silicon Carbide</b>        |          |                |
|         | Ø 375 x 40 mm Grit 16                  | 5        | 1387 5016 A00A |
|         | Ø 375 x 40 mm Grit 24                  | 10       | 1387 5024 A00A |
|         | Ø 375 x 40 mm Grit 40                  | 10       | 1387 5040 A00A |

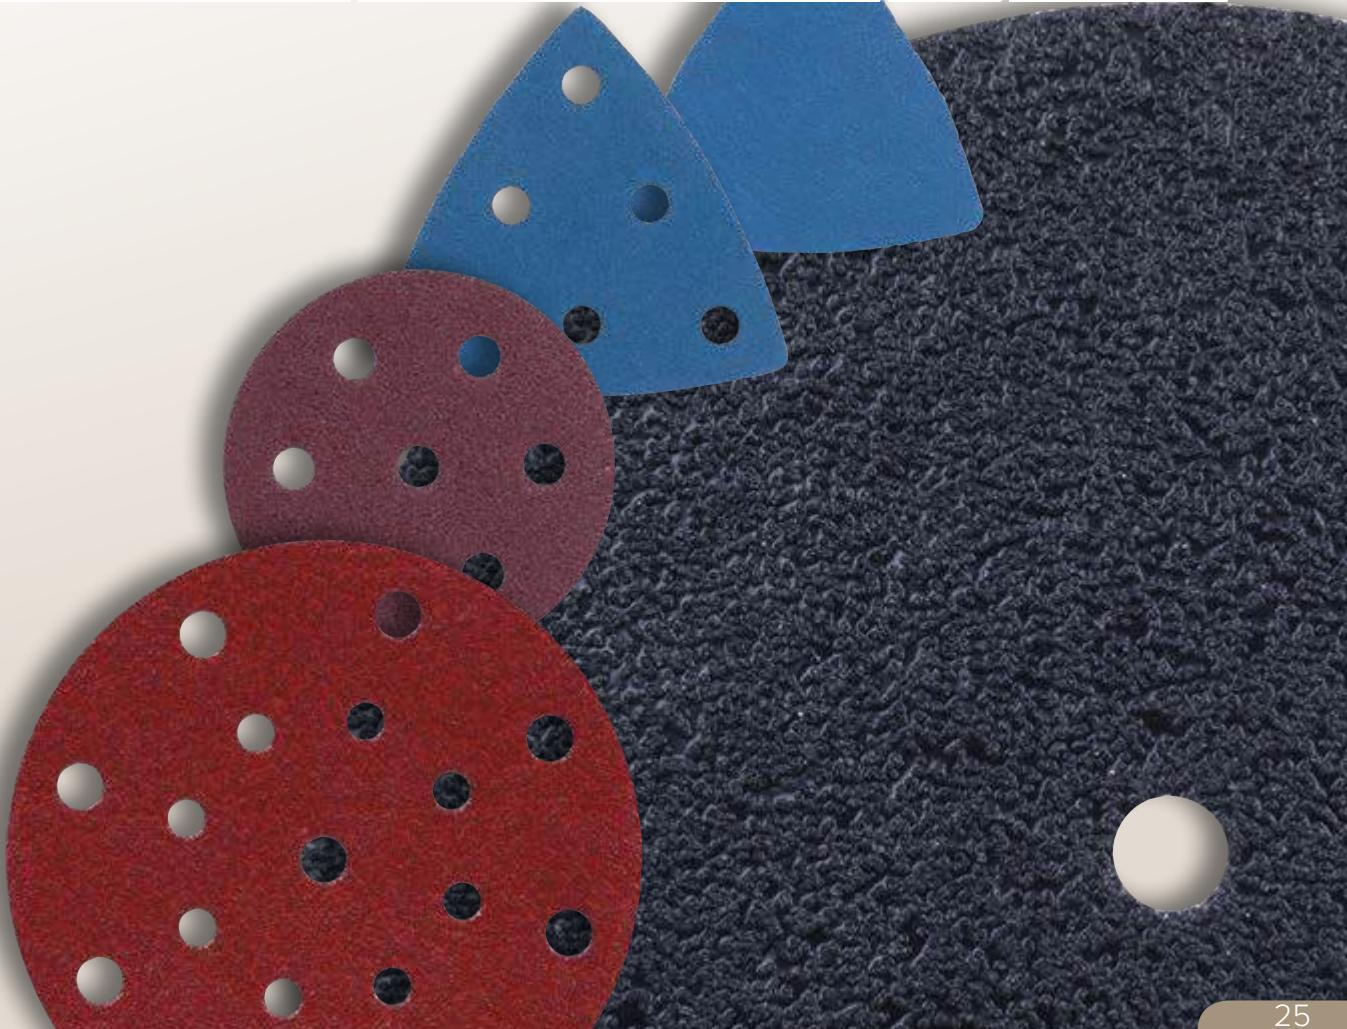

# SURFACE TREATMENT



## HiPro-Pads

- + Aggressive, hard sanding pad for cleaning or structuring work
- + Effective but gentle removal of dirt
- + Material: 3M HiPro



## Polishing Pads

- + High quality for cleaning and polishing work
- + Available in different degrees of hardness and dimensions
- + Material: nylon



| Product                                                                           | Description                     | Piece/VE | Art.-No.       |
|-----------------------------------------------------------------------------------|---------------------------------|----------|----------------|
|  | <b>ABRAPRIME PAD HIPro-PADS</b> |          |                |
|                                                                                   | <b>Nylon/Silicon Carbide</b>    |          |                |
|                                                                                   | Ø 410 mm                        | 3        | 1390 0028 A00A |
|                                                                                   | Ø 150 mm                        | 3        | 1390 0129 A00A |
|                                                                                   | Ø 125 mm                        | 5        | 1390 0126 A00A |
|                                                                                   | Ø 115 mm                        | 5        | 1390 0124 A00A |

## Abrasive Pads

- + Aggressive, hard sanding pad for cleaning or abrading
- + Also ideal for polishing when using colorless oils
- + Material: nylon / corundum



| Product                                                                             | Description                    | Piece/VE | Art.-No.       |
|-------------------------------------------------------------------------------------|--------------------------------|----------|----------------|
|  | <b>ABRAPRIME PAD ABRASIVES</b> |          |                |
|                                                                                     | <b>Ø 410 mm Nylon/Corundum</b> |          |                |
|                                                                                     | Ø 410 x 10 mm Grit 180         | 5        | 1390 0108 A00A |
|  | Ø 410 x 10 mm Grit 280         | 5        | 1390 0110 A00A |
|                                                                                     | <b>Ø 150 mm Nylon/Corundum</b> |          |                |
|                                                                                     | Ø 150 x 10 mm Grit 180         | 10       | 1391 909 A00A  |

| Product                                                                               | Description                        | Piece/VE | Art.-No.       |
|---------------------------------------------------------------------------------------|------------------------------------|----------|----------------|
|   | <b>ABRAPRIME PAD POLISHINGPADS</b> |          |                |
|                                                                                       | <b>Ø 410 mm Nylon</b>              |          |                |
|                                                                                       | Ø 410 x 10 mm white                | 10       | 1390 0018 A00A |
|                                                                                       | Ø 410 x 10 mm beige                | 10       | 1390 0014 A00A |
|                                                                                       | Ø 410 x 10 mm green                | 10       | 1390 0013 A00A |
|                                                                                       | Ø 410 x 10 mm black                | 10       | 1390 0015 A00A |
|                                                                                       | Ø 410 x 20 mm white                | 5        | 1390 0005 A00A |
|                                                                                       | Ø 410 x 20 mm beige                | 5        | 1390 0010 A00A |
|                                                                                       | Ø 410 x 20 mm red                  | 5        | 1390 0008 A00A |
|                                                                                       | Ø 410 x 20 mm green                | 5        | 1390 0006 A00A |
|                                                                                       | Ø 410 x 20 mm brown                | 5        | 1390 0009 A00A |
|                                                                                       | Ø 410 x 20 mm black                | 5        | 1390 0007 A00A |
|  | <b>Ø 150 mm Nylon</b>              |          |                |
|                                                                                       | Ø 150 x 10 mm white                | 5        | 1390 0029 A00A |
|                                                                                       | Ø 150 x 10 mm beige                | 5        | 1391 0031 A00A |
|                                                                                       | Ø 150 x 10 mm green                | 5        | 1391 0030 A00A |
|                                                                                       | Ø 150 x 10 mm black                | 5        | 1391 0028 A00A |
|  | <b>110x250x10 mm Nylon</b>         |          |                |
|                                                                                       | 110x250x10 mm white                | 10       | 1390 0064 A00A |
|                                                                                       | 110x250x10 mm beige                | 10       | 1390 0065 A00A |
|                                                                                       | 110x250x10 mm green                | 10       | 1390 0066 A00A |
|  | Felt Polishing Disc 410            | 10       | 1390 0038 A00A |

# SURFACE TREATMENT




## Sanding Screen

- + Silicon carbide grain for fine sanding of wood
- + Open structure reduces clogging effects
- + A pad disc is recommended as a base
- + Ideal for fine finishing and intermediate sanding of all wood floor finishes
- + Grain: silicon carbide, on linen web

Materials science:  
The silicon carbide grain is an artificially produced, hard, pointed and brittle grain. This property breaks it up again and again and offers very good sanding properties in the area of hard coatings.



| Product                                                                            | Description                     | Piece/VE | Art.-No.       |
|------------------------------------------------------------------------------------|---------------------------------|----------|----------------|
|  | <b>ABRAPRIME NET ABRASIVES</b>  |          |                |
|                                                                                    | <b>Ø 410 mm Silizium-Carbid</b> |          |                |
|                                                                                    | Ø 410 mm Grit 60                | 10       | 1384 1063 A00A |
|                                                                                    | Ø 410 mm Grit 80                | 10       | 1384 1083 A00A |
|                                                                                    | Ø 410 mm Grit 100               | 10       | 1384 1103 A00A |
|                                                                                    | Ø 410 mm Grit 120               | 10       | 1384 1123 A00A |
|                                                                                    | Ø 410 mm Grit 150               | 10       | 1384 1153 A00A |
|                                                                                    | Ø 410 mm Grit 180               | 10       | 1384 1183 A00A |

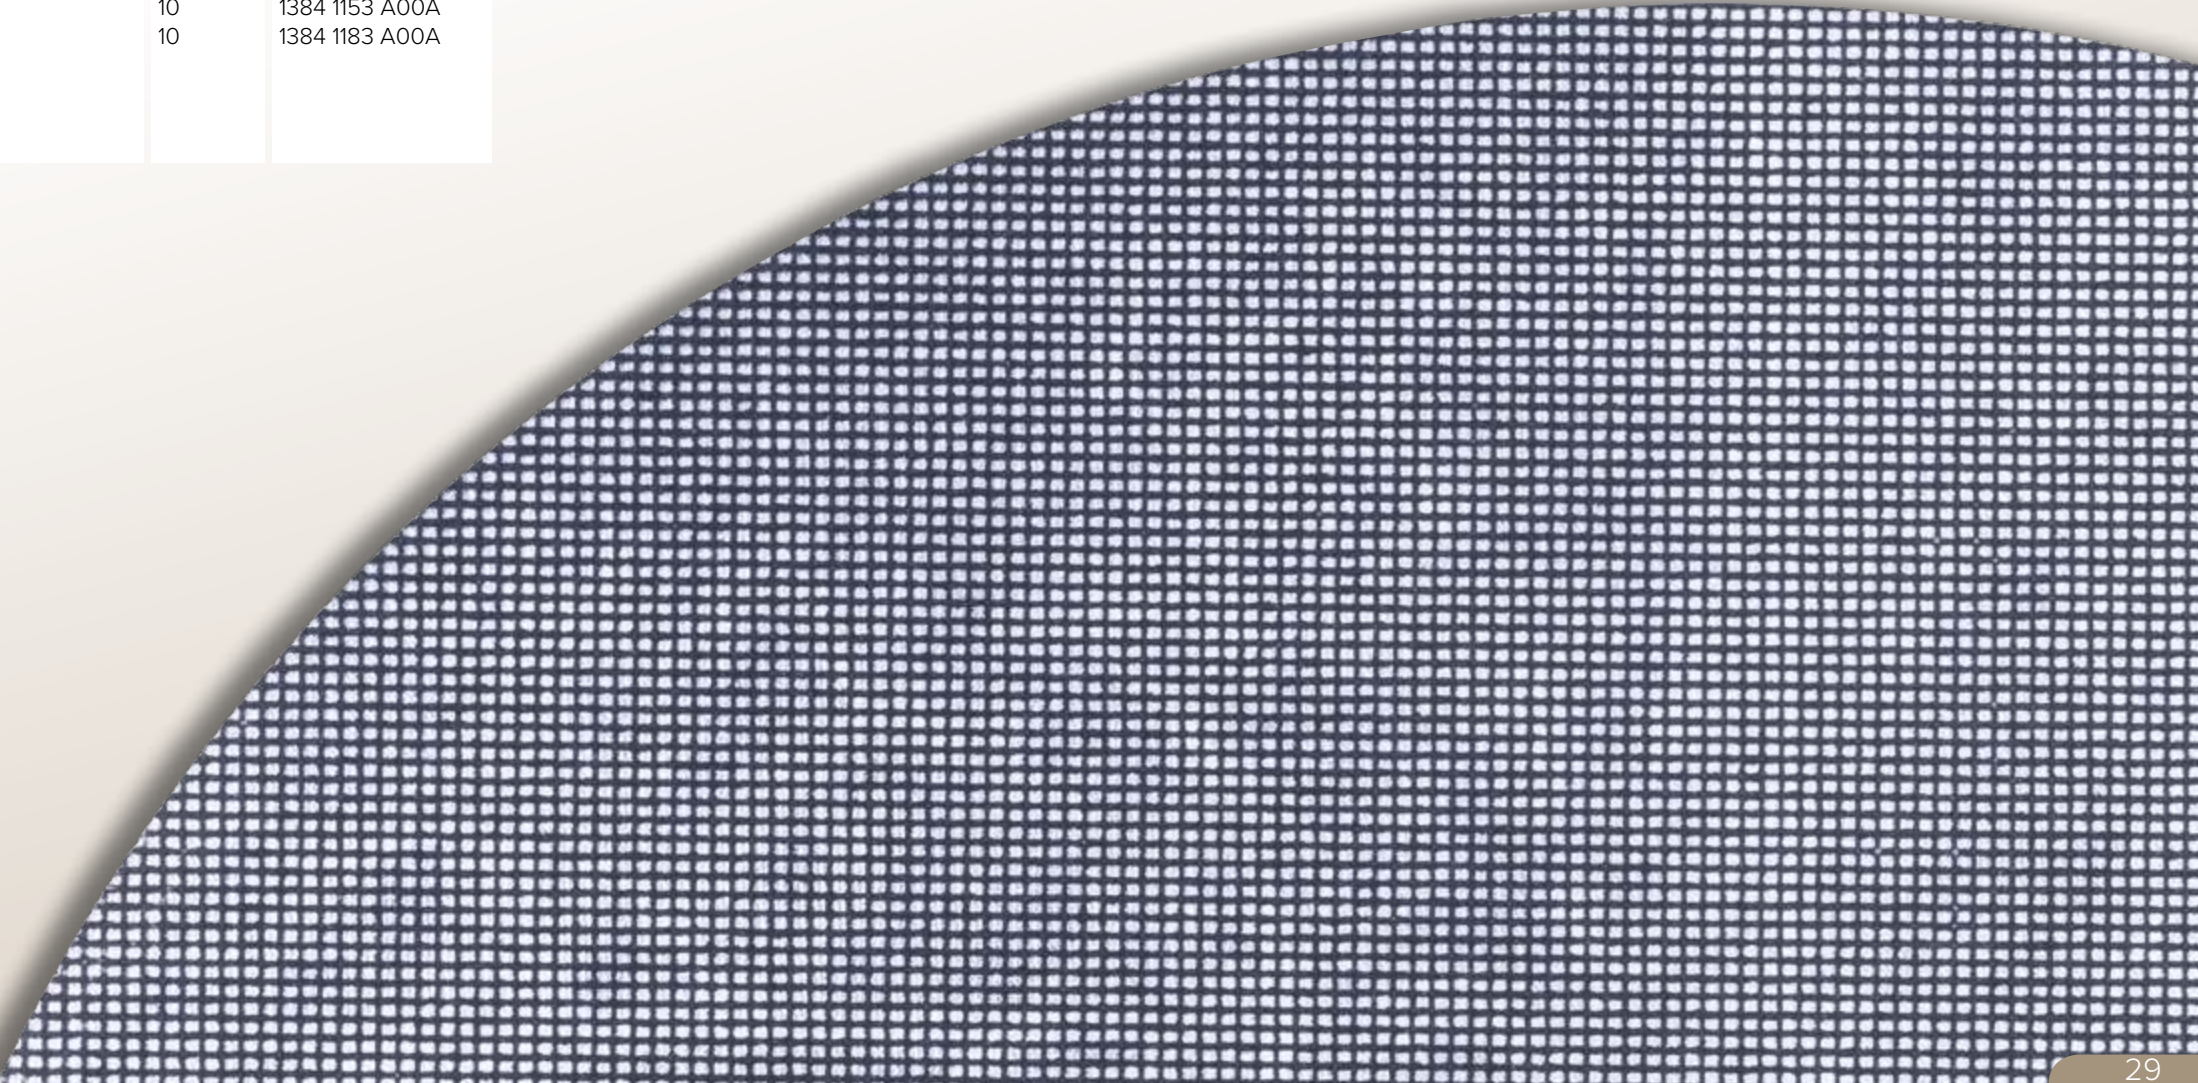

# CLEANING AND MAINTENANCE




## Polishing Pads

- + High quality for cleaning and polishing work
- + Available in different degrees of hardness and dimensions
- + Material: nylon



## HiPro-Pads

- + Aggressive, hard sanding pad for cleaning or structuring work
- + Effective but gentle removal of dirt
- + Material: 3M HiPro

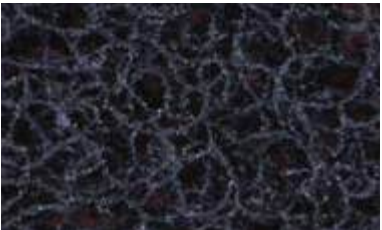

| Product | Description                        | Piece/VE | Art.-No.       |
|---------|------------------------------------|----------|----------------|
|         | <b>ABRAPRIME PAD POLISHINGPADS</b> |          |                |
|         | <b>Ø 410 mm Nylon</b>              |          |                |
|         | Ø 410 x 10 mm white                | 10       | 1390 0018 A00A |
|         | Ø 410 x 10 mm beige                | 10       | 1390 0014 A00A |
|         | Ø 410 x 10 mm green                | 10       | 1390 0013 A00A |
|         | Ø 410 x 10 mm black                | 10       | 1390 0015 A00A |
|         | Ø 410 x 20 mm white                | 5        | 1390 0005 A00A |
|         | Ø 410 x 20 mm beige                | 5        | 1390 0010 A00A |
|         | Ø 410 x 20 mm red                  | 5        | 1390 0008 A00A |
|         | Ø 410 x 20 mm green                | 5        | 1390 0006 A00A |
|         | Ø 410 x 20 mm brown                | 5        | 1390 0009 A00A |
|         | Ø 410 x 20 mm black                | 5        | 1390 0007 A00A |
|         | <b>Ø 150 mm Nylon</b>              |          |                |
|         | Ø 150 x 10 mm white                | 5        | 1390 0029 A00A |
|         | Ø 150 x 10 mm beige                | 5        | 1391 0031 A00A |
|         | Ø 150 x 10 mm green                | 5        | 1391 0030 A00A |
|         | Ø 150 x 10 mm black                | 5        | 1391 0028 A00A |
|         | <b>110x250x10 mm Nylon</b>         |          |                |
|         | 110x250x10 mm white                | 10       | 1390 0064 A00A |
|         | 110x250x10 mm beige                | 10       | 1390 0065 A00A |
|         | 110x250x10 mm green                | 10       | 1390 0066 A00A |
|         | Felt Polishing Disc 410            | 10       | 1390 0038 A00A |

| Product | Description                     | Piece/VE | Art.-No.       |
|---------|---------------------------------|----------|----------------|
|         | <b>ABRAPRIME PAD HIPro-PADS</b> |          |                |
|         | <b>Nylon/Silicon Carbide</b>    |          |                |
|         | Ø 410 mm                        | 3        | 1390 0028 A00A |
|         | Ø 150 mm                        | 3        | 1390 0129 A00A |
|         | Ø 125 mm                        | 5        | 1390 0126 A00A |
|         | Ø 115 mm                        | 5        | 1390 0124 A00A |

## Specials


| Product | Description                                                                     | Piece/VE | Art.-No.  |
|---------|---------------------------------------------------------------------------------|----------|-----------|
|         | <b>ABRAPRIME ELASTICBRUSH EXTREME (blue)</b>                                    | 1        | 1114 A00A |
|         | We offer the following machine adapters:                                        |          |           |
|         | Adapter Numatic                                                                 |          | 1151 A00A |
|         | Adapter Targo Ergodisc                                                          | 1        | 1152 A00A |
|         | Adapter Sorma                                                                   | 1        | 1153 A00A |
|         | Adapter Wirbel                                                                  | 1        | 1154 A00A |
|         | Adapter Set Columbus                                                            | 1        | 1156 A00A |
|         | Adapter Set Lägler                                                              | 1        | 1157 A00A |
|         | Adapter Set Bona FlexiSand                                                      | 1        | 1135 A00A |
|         | Adapter SRP2 Nilfisk II                                                         | 1        | 1149 A00A |
|         | <b>BERGERTOOL PADHOLDER EASY</b> 115x230                                        | 1        | 1130 A00A |
|         | <b>BERGERTOOL PADHOLDER ERGO</b> 115x230                                        | 1        | 1131 A00A |
|         | <b>BERGERTOOL PADHOLDER ERGO STIEL</b> Telesco-<br>pe, variable from 100-180 cm | 1        | 1132 A00A |

# ELASTIC FLOORS



| Product | Description                                    | Piece/VE | Art.-No.  |
|---------|------------------------------------------------|----------|-----------|
|         | <b>ABRAPRIME ELASTICBRUSH EXTREME</b> (blue)   | 1        | 1114 A00A |
|         | We offer the following machine adapters:       |          |           |
|         | Adapter Numatic                                | 1        | 1151 A00A |
|         | Adapter Targo Ergodisc                         | 1        | 1152 A00A |
|         | Adapter Sorma                                  | 1        | 1153 A00A |
|         | Adapter Wirbel                                 | 1        | 1154 A00A |
|         | Adapter Set Columbus                           | 1        | 1156 A00A |
|         | Adapter Set Lägler                             | 1        | 1157 A00A |
|         | Adapter Set Bona FlexiSand                     | 1        | 1135 A00A |
|         |                                                |          |           |
|         | <b>ABRAPRIME INTERFACEPAD</b> Ø 410            | 1        | 1127 A00A |
|         | <b>ABRAPRIME INTERFACEPAD</b> Ø 150            | 1        | 1128 A00A |
|         | <b>ABRAPRIME INTERFACEPAD</b> 115x230 mm       | 1        | 1129 A00A |
|         |                                                |          |           |
|         |                                                |          |           |
|         |                                                |          |           |
|         | <b>ABRAPRIME ABRANET ACE</b> Ø 406/ Korn 80    | 1        | 1115 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> Ø 406/ Korn 120   | 1        | 1116 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> Ø 406/ Korn 150   | 1        | 1117 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> Ø 150/ Korn 80    | 8        | 1118 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> Ø 150/ Korn 120   | 8        | 1119 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> Ø 150/ Korn 150   | 8        | 1120 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> 115x230/ Korn 80  | 8        | 1121 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> 115x230/ Korn 120 | 8        | 1122 A00A |
|         | <b>ABRAPRIME ABRANET ACE</b> 115x230/ Korn 150 | 8        | 1123 A00A |

| Product | Description                            | Piece/VE | Art.-No. |
|---------|----------------------------------------|----------|----------|
|         | <b>ABRAPRIME ABRANOP AN</b> Ø 410      |          | 1124A00A |
|         | <b>ABRAPRIME ABRANOP AN</b> Ø 150      | 5        | 1125A00A |
|         | <b>ABRAPRIME ABRANOP AN</b> 115x230 mm | 5        | 1126A00A |
|         |                                        |          |          |
|         |                                        |          |          |
|         |                                        |          |          |

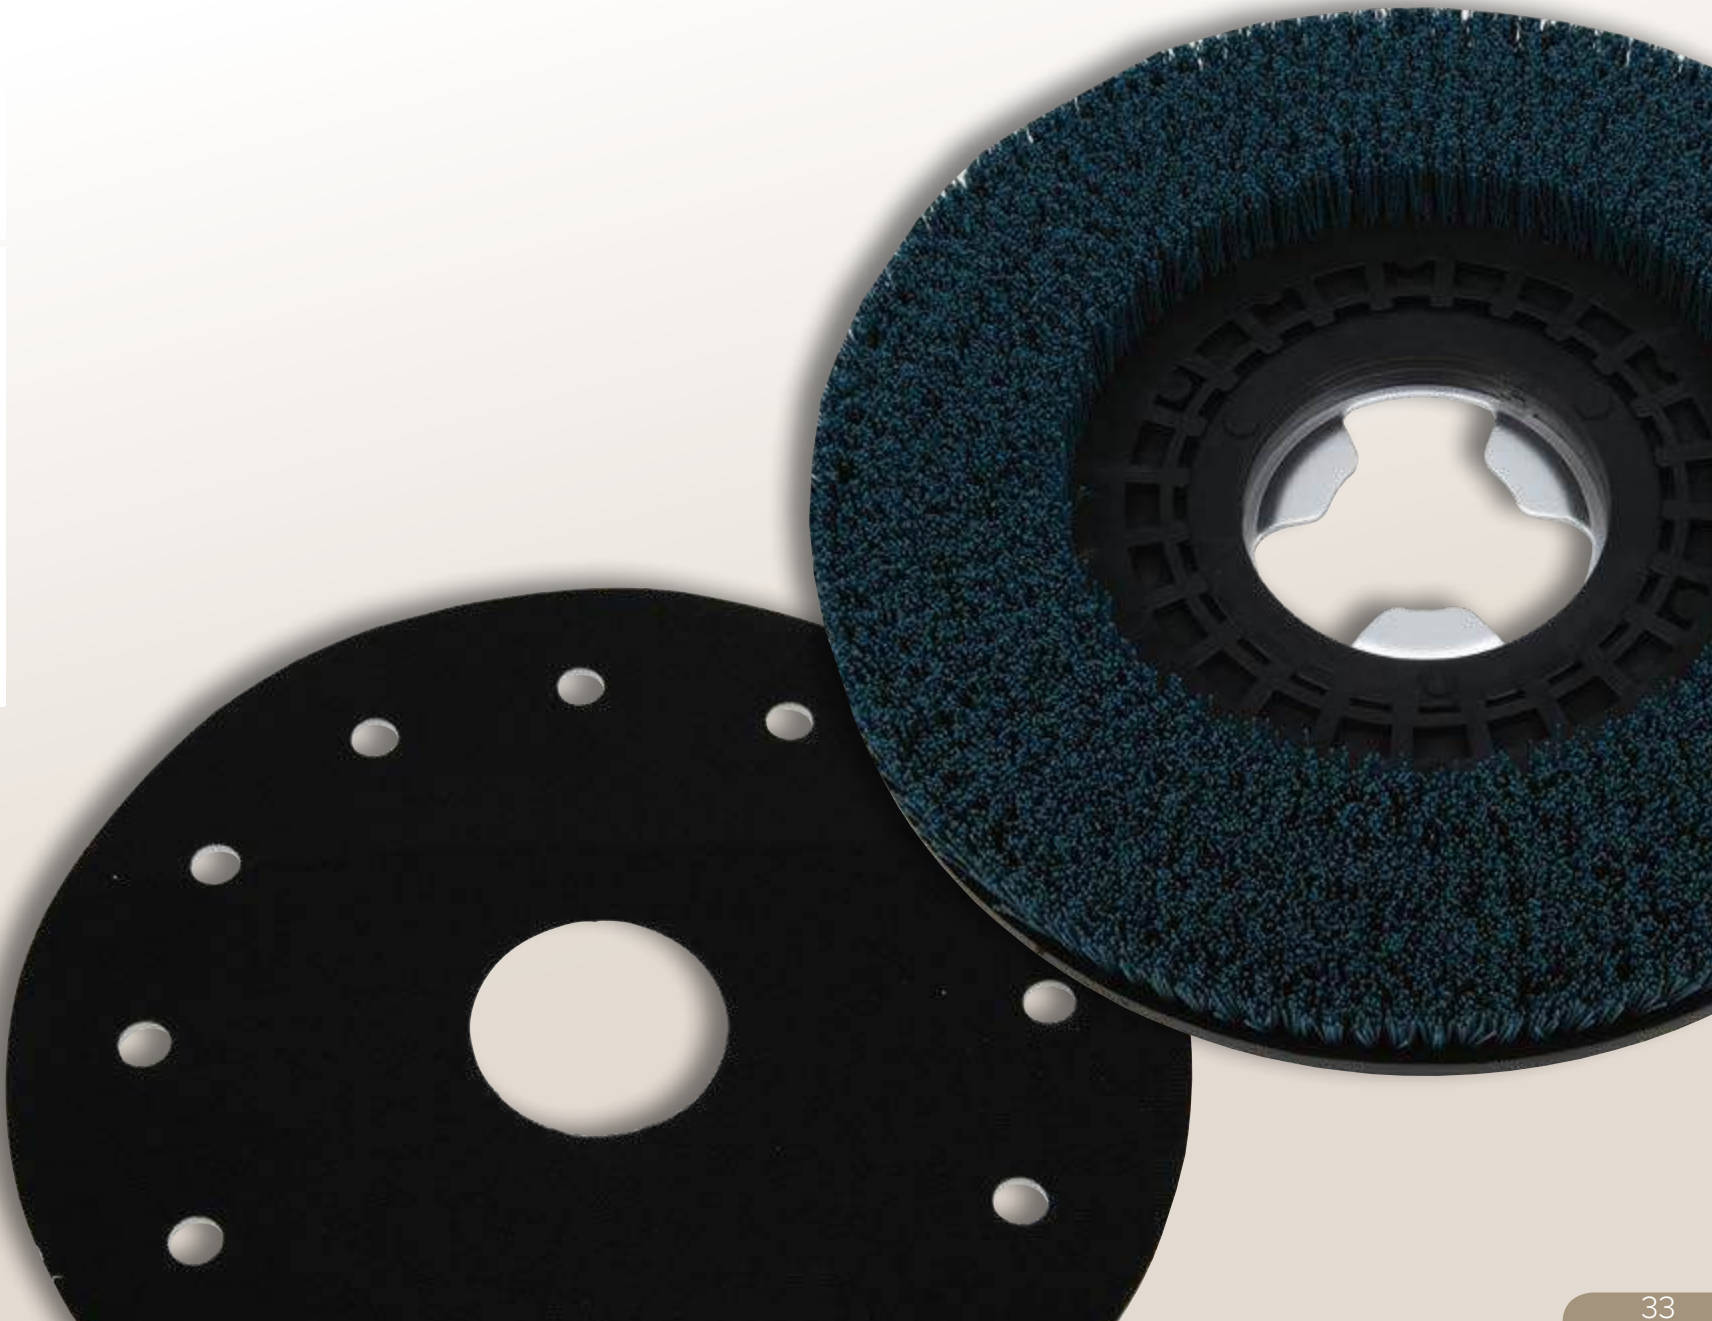

# WATER-BASED SYSTEMS



## AQUASEAL®

The present and the future of wood floor finishing is based on water.

Water-based finishes of the latest generation impress with their outstanding performance and diversity. No matter what focus contractors or home owners have, whether high-traffic or simple living area, whether one- or two-component, whether sealer or finish, whether filler or problem solver, or simply fast workability: water-based solutions by Berger-Seidle® offer all options.

The AQUASEAL® brand stands for premium water-based finishing for generations all over the world through all climate zones. This includes all categories of water-based finishes and offers additional extras. High quality health and safety conscious variety of products tested for compatibility.

The highly specialized AQUASEAL® technology represents globally award innovation, with products such as the world's first two-component water-based finish, completely without isocyanate or aziridine.

AQUASEAL® combines health protection, ecology, economics, user friendliness and reliable premium performance. A mature combination of permanent innovation and proven reliability, acknowledged numerous certificates: EC1 label, Blue Angel, Grüner Punkt, sports flooring certificates, LEED, or the fulfillment of numerous DIN standards for skid resistance, saliva fastness, children's toys conformity, fire safety and much more.

Water-based wood floor finishing options on highest level!



# WATER-BASED SYSTEMS



## Wood-filler Solutions

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Shelf Life | Giscode | Dry Time     | Application / Consumption                                                                                       | Sheens / Color Shades / Art-No.                                                                                                                                                                                                         | Certificates / Approvals                                                              | Packaging                                                                                               | Pallet                |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|--------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------|
|    | <b>AQUASEAL® PAFUKI</b> is a water-based, solvent-free filler solution for the preparation of wood-filler offering excellent filling property. The wood color is achieved by admixing the respective fine wood dust.                                                                                                                                                                                                                                                          | 15 months* | W2+     | -            | <br>50-70 g/m <sup>2</sup>   | XG12-0000-OAL                                                                                                                                                                                                                           |    | 5 l VE4<br>1 l VE10  | 96 x 5 l<br>280 x 1 l |
|    | <b>AQUASEAL® PAFUKI POWDER COLOR</b> is a solvent-free, scentless joint filler with excellent filling properties. The powder offers the colors of the desired wood color shade (no need to add wood dust). After adding water, the joint filler is ready to use. The great filling effect and fast drying within 20-30 minutes are outstanding. It can also be used in combination with AQUASEAL PAK STOP.                                                                    | 60 months* | W1      | 20-30 min.** | <br>50-70 g/m <sup>2</sup>   | Oak light, Beech/Red oak, Maple / Ash / Pine, Wenge / Smoked oak, Azobe / Teak, Black, White<br><br>All colors and Art-No. see colorchart page 39.                                                                                      |    | 5 kg                 | 33 x 5 kg             |
|   | <b>AQUASEAL® PAK STOP</b> is a unique, extreme-performance, high-elastic trowel filler for closing wide joints; perfectly suitable also for plank flooring. It is certified to block problematic polycyclic aromatic hydro-carbons, for example, emerging from old adhesives under historical wood floors. By mixing AQUASEAL PAK STOP with AQUASEAL PAFUKI POWDER COLOR, the final performance and individual color are easily achieved.                                     | 15 months* | W2+     | 14-16 hrs.** | <br>150-200 g/m <sup>2</sup> | XG17-0000-OAE                                                                                                                                                                                                                           |    | 4,5 kg                                                                                                  | -                     |
|  | <b>AQUASEAL® FLEXFILL COLOR</b> is the silicone-free joint-filler on acrylate basis for sealing wood-floor joints. This high-quality specialty product is sandable in a short time and can be topcoated with all commercial wood floor finishes. AQUASEAL® FLEXFILL COLOR features an excellent adhesion and can be just as well used as adhesive. AQUASEAL® FLEXFILL COLOR is elastic, free of solvents and odor; it can be used on finished and unfinished hardwood-floors. | 48 months* | W1      | 18-24 hrs.** | -                                                                                                               | Spruce / Fir / Maple, Ash / Pine / Hard Maple, Oak light / Chestnut, Beech dark / Cherry / Alder, Doussie / Merbau / Pear, Mahogany / Azobe / Teak, White, Light grey, Black, ...<br><br>All colors and Art-No. see colorchart page 41. |  | Box of 12 Pieces<br><br>Single<br><br>310 ml                                                            | -                     |
|  | <b>AQUASEAL® FLEXFILL COLOR SET</b> offers the matching set options:<br>SYSTAINER-INSERT for 18 Cartridges of AQUASEAL FLEXFILL COLOR, single<br>AQUASEAL FLEXFILL COLOR SPRAY BOTTLE, single<br>BERGERTOOL APPLICATIONGUN M, single<br>BERGER-SEIDLE SYSTAINER®, large, empty<br>Complete set for AQUASEAL FLEXFILL COLOR, empty                                                                                                                                             | -          | -       | -            | -                                                                                                               | 1212 A00A<br>1213 A00A<br>1214 A00A<br>1023 A00A<br>1215 A00A                                                                                                                                                                           | -                                                                                     | -                                                                                                       | -                     |
|  | <b>AQUASEAL® FLEXFILL COLOR DESKTOP COLOR CHART</b> offers decorative sales support for your shop.                                                                                                                                                                                                                                                                                                                                                                            | -          | -       | -            | -                                                                                                               | 1282A00A (Version DE)<br>1283A00A (Version EN)                                                                                                                                                                                          | -                                                                                     | -                                                                                                       | -                     |
|                                                                                     | <b>AQUASEAL® FLEXFILL COLOR SAMPLE SET</b> helps you choose the right color and is always with you due to its practical, compact size. The popular BERGER-SEIDLE® MINI-SYSTAINER® contains the color sample cards of all colors.                                                                                                                                                                                                                                              | -          | -       | -            | -                                                                                                               | 1217A00A                                                                                                                                                                                                                                | -                                                                                     | -                                                                                                       | -                     |

# WATER-BASED SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!




## AQUASEAL® PAK STOP Durable and flexible Joint Filling for sustainable Floor Renovation

### The Task

Everyone knows the situation: there are construction sites with special challenges! This is especially true for joints/gaps that cannot be filled with the usual sealing products. The following questions quickly arise, for example:

- How do I maintain and rehabilitate an old floor with PAK contamination?
- How do I solve the joint problem on old floors in general?
- How do I deal with wide or changing joints?
- How do I certifiably isolate the subfloor from the surface?
- How do I color match special joints?
- How do I fill a joint solidly and over-sealable?
- How do I solve cases of old parquet adhesives, leveling compounds or cardboard constructions generally?

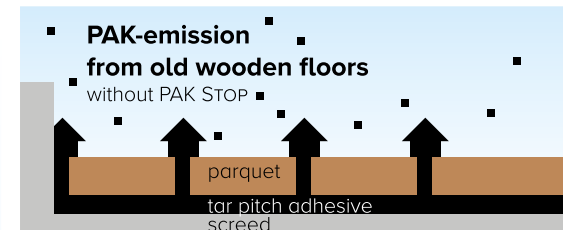


Old floors are particularly critical if the old adhesive or subfloor construction contains PAKs (polycyclic aromatic hydrocarbons). The best-known component of PAKs is benzo(a)pyrene, a substance that is now known to be a carcinogenic, mutagenic and fruit-damaging. PAKs normally occur in dust form and are released into the indoor air via existing parquet joints into the indoor air. All old floors from before 1976 are to be regarded as critical, because black coal tar pitch adhesive was often used here, which contains PAHs and makes prophylactic remediation is recommended.

### The solution: AQUASEAL® PAK STOP

You can answer these cases and questions with AQUASEAL PAK STOP! The product offers numerous advantages:

- + solvent free
- + water based
- + highly elastic
- + individual coloration options
- + very environmentally friendly
- + strongly isolating properties
- + low-smelling
- + silicone free
- + sandable
- + very low shrinkage
- + over-coatable
- + excellent adhesion
- + multi purpose usability
- + fast drying
- + saves money for renovation of old floors
- + certified PAK renovation

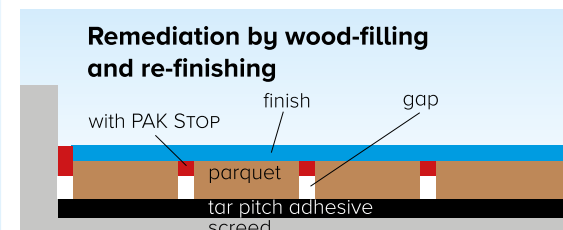

This means for your special cases: with AQUASEAL® PAK STOP you save risk, total remediation, waste, money and have a safe solution in the proven, certified and unique Berger-Seidle system. Especially in the case of PAK renovation, the encapsulation properties by AQUASEAL® PAK STOP also replaces legal duties and risks for the renovating company. Joints are sealed and leakage is prevented.

**The application is simple:** AQUASEAL® PAK STOP is mixed with 30% AQUASEAL® PAFUKIPOWDER COLOR in the desired color. Done! Follow the further instructions in the technical data sheet.

### Die Farbwelt von AQUASEAL® PAFUKIPOWDER COLOR

**White**  
XZ03-10A8-0A0

**Maple/Ash/Pine**  
XZ03-8075-0A0

**Oak light**  
XZ03-8067-0A0

**Black**  
XZ03-4060-0A0

**Beech/Red oak**  
XZ03-8072-0A0

**Azobe/Teak**  
XZ03-8076-0A0

**Wenge/Smoked oak**  
XZ03-80S6-0A0



# WATER-BASED SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!



## AQUASEAL® FLEXFILL COLOR

### The perfectly matched premium Wood Gap Filler Safe, Flexible and Colorful

AQUASEAL® FLEXFILL COLOR is the silicone-free, acrylic-based problem solver for sealing wood floor gaps in the surface as well as in edge areas. This high-quality specialty can be quickly sanded, over-coated and combined with all standard parquet finishes. It is stable, 1-component, can be leveled by trowel and bridges natural movements of the wood up to certain point. AQUASEAL® FLEXFILL COLOR performs with a strong adhesion and can therefore also be used as a glue. It is elastic, solvent-free, non-smelling and can be used on both sealed and unsealed wood floors. The latest generation of the product offers you all around advantages.

## Matching Products in Combination

- BERGERTOOL SMARTCORD:** The ideal solution for pre-filling large gaps before you use AQUASEAL® FLEXFILL COLOR
- BERGER-SEIDLE SYSTAINER®:** Perfect for the safe and representative transport
- FLEXFILL SYSTAINER®-INSERT:** Cartridges ideally arranged for use in the SYSTAINER®
- FLEXFILL SPRAY BOTTLE:** The right spray bottle fits perfectly in the SYSTAINER®
- BERGERTOOL APPLICATION GUN:** The suitable cartridge press BERGERTOOL APPLICATIONGUN M for the SYSTAINER® insert

## The Advantages

- + Solvent free
- + Sandable
- + Silicone free
- + Very low shrinkage
- + Non-smelling
- + Ideal elasticity
- + Fast drying
- + Over-coatable
- + Excellent adhesion
- + Multipurpose useability
- + Very colorful with 15 ready standard colors
- + Several wooden color shades plus modern shades of grey, white and black available
- + Can be combined perfectly with matching BERGER-SEIDLE SYSTAINERS® and SYSTAINER® inserts



## World of Colors

The possibilities of printing to reproduce colors are limited. For this reason, slight differences may occur between the colors printed and the true shades. We therefore recommend making samples for approval in any case.

**Beech Light / Red Oak Light / Yew**  
XZ19-80S2-0AL

**Spruce / Fir / Maple**  
XZ19-80R7-0AL

**Beech Dark / Red Oak Dark / Cherry / Alder**  
XZ19-80S3-0AL

**Ash / Pine / Hard Maple**  
XZ19-80R8-0AL

**Jarrah / Red Eucalyptus / Brazilian Cherry**  
XZ19-C062-0AL

**Doussie / Merbau / Pear**  
XZ19-80S4-0AL

**Oak Light / Chestnut**  
XZ19-80R9-0AL

**Mahogany / Azobe / Teak**  
XZ19-80S5-0AL

**Oak Dark**  
XZ19-8071-0AL

**Wenge / Smoked Oak**  
XZ19-80S6-0AL

**Afromosia / Iroko / Jatoba**  
XZ19-80S1-0AL

**White**  
XZ19-90F3-0AL

**Light Grey**  
XZ19-7092-0AL

**Medium Grey**  
XZ19-70F8-0AL

**Dark Grey / Anthracite**  
XZ19-70X7-0AL

**Black**  
XZ19-90CA-0AL

# WATER-BASED SYSTEMS



## Primers

| Product                                                                             | Description                                                                                                                                                                                                                                                                                              | Shelf Life | Giscode | Dry Time   | Application / Consumption                                                                                                                            | Sheens / Color Shades / Art-No.             | Certificates / Approvals                                                              | Packaging  | Pallet      |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------|------------|-------------|
|    | <b>AQUASEAL® FLEXPRIMER</b> is a 1-component, water-based sealer reducing sidebonding, for all our AQUASEAL finishes. AQUASEAL® FLEXSEALER features a medium grain enhancement and a neutral color look. It can be applied on all floors sanded down to bare wood.                                       | 15 months* | W2+     | 1 hrs.**   | <br>Micro. Plus /<br>Univers. Roller<br>100-120 ml/m <sup>2</sup> | XG14-0000-0AA                               |    | 5 l VE4    | 96 x 5 l    |
|    | <b>AQUASEAL® EXOBLOC</b> is a 1-component, water-based sealer with beautifully, intense grain enhancement properties and excellent adhesion on many floors. Thanks to its high blocking effect against a variety of wood ingredients it is the perfect solution for most exotic woods or stained floors. | 15 months* | W3+     | 1-2 hrs.** | <br>Micro. Plus / Uni-<br>vers. Roller<br>100 ml/m <sup>2</sup>   | XG20-0000-0AA                               |    | 5 l VE4    | 96 x 5 l    |
|   | <b>AQUASEAL® EXOBLOC TURBO</b> is a booster for AQUASEAL® EXOBLOC. After adding in the mixing ratio 1:10 to AQUASEAL® EXOBLOC, EXOBLOC can be applied already after 2 hours on CLASSIC EXPRESSSTAIN COLOR.                                                                                               | 12 months* | -       | -          | -                                                                                                                                                    | PW13-0000-0AF                               |    | 0,5 l      | 480 x 0,5 l |
|  | <b>AQUASEAL® PINKQUALIZER</b> is a water-based reactive stain, eliminating pink and red colors in many reddish wood species. This 2-component products can be used in just one application step and can be used combination with all our water-based finishes, sealers as well as CLASSIC BASEOIL COLOR. | 12 months* | -       | 12 hrs.**  | <br>2200-2500 sf/gal                                            | 1258-A00A<br>(Set, Comp. A+B in our MixBox) |  | 2 x 3,79 l | 30          |

## Hardwood-floor Finishes 2K

| Product                                                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Shelf Life | Giscode | Dry Time   | Application / Consumption                                                                                                                                | Sheens / Color Shades / Art-No.                                                                                           | Certificates / Approvals                                                                                                                                                                                     | Packaging                                                                                                     | Pallet                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------|
|  | <b>AQUASEAL® GREENSTAR</b> is a 2-component, waterborne, premium wood floor finishing product. Based on polyurethane, it offers outstanding resistance and workability. Although it is 2-component, the product (including the hardener) is completely free of hazard labelling, and contains no isocyanate, no aziridine, no H- and P-phrases according CLP legislation, and causes no CO <sub>2</sub> gas by the reaction. Also, the product offers an extremely long pot life after mixing of component A and B of at least 18 hours. Based on its special properties and elasticity, the product is approved for cork floors and also achieves outstanding chemical resistance.                                                                   | 18 months* | W2+     | 3-4 hrs.** | <br>Micro. Plus / Uni-<br>vers. Roller<br>100-120 ml/m <sup>2</sup> | ultram, mat, semigloss, gloss<br><br>XS81-0000-00B (UM)<br>XS81-0000-02B (MA)<br>XS81-0000-04B (SG)<br>XS81-0000-08B (GL) | <br>DIN V 18032-2<br>DIN EN 14904<br>DIN 71-3<br>DIN 53160<br>DIN 51130 (R9)<br>(R10/R11 with Add)<br>AS 4586:2013 (P5) | 5,5 l VE3<br>1,65 l VE6  | 63 x 5,5 l<br>180 x 1,65 l |
|  | <b>AQUASEAL® CERAMICSTAR</b> is a 2-component, waterborne, premium wood floor finishing product. It is based on polyurethane and offers outstanding resistance, an universal high-end applicability and workability offering a slightly lower level of viscosity. The product is very easy-to-use and offers an extremely strong level of robustness, supported by its ceramic components. It is the ideal product for the fast installation job, as the finished floor can be used after just 12 hours. Also especially for the renovation of older floors, the product is the perfect solution. It achieves top-level results by shielding old substances inside the wood, such as salt from winter times, and so it maximizes the level of safety. | 12 months* | W3/DD+  | 3-4 hrs.** | <br>Micro. Plus / Uni-<br>vers. Roller<br>100-120 ml/m <sup>2</sup> | ultram, mat, semigloss<br><br>XS68-0000-00C (UM)<br>XS68-0000-02C (MA)<br>XS68-0000-04C (SG)                              | <br>DIN 71-3<br>DIN 51130 (R9)<br>(R10/R11 with Add)<br>DIN EN 13501-1 Class<br>Cfl-s1 (SG)<br>AS 4586:2013 (P5)        | 5,5 l VE3<br>1,65 l VE6  | 63 x 5,5 l<br>180 x 1,65 l |

# WATER-BASED SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!

## AQUASEAL® GREENSTAR - The First Waterborne Two Component Finish without any Hazard Labelling on Hardener According CLP Legislation


Simply green – this is the revolution of 2-component wood floor finishing. With the introduction of their innovation AQUASEAL® GREENSTAR in 2016, Berger-Seidle® became the first to offer a **two-component finish system completely free of any hazard labelling** on the hardener. As the product is Isocyanate and Aziridine free, it avoids any H- and P- statements on the label. Wood finishing professionals **no longer have to work with protective measures normally required for products containing isocyanates**. This constitutes a new level and generation of environmental, user, and health protection. In addition, AQUASEAL® GREENSTAR **does not emit any CO<sub>2</sub> gasses** during the reaction as conventional 2-component systems must as a result of their technology.

This new technological innovation from Berger-Seidle® features not only first-class 2-Component performance in a water based finish but also the **highest resistance values, cork approval**, and unmatched user friendliness.



As a top product at Berger-Seidle®, AQUASEAL® GREENSTAR also offers **numerous comprehensive certifications and approvals**. Wood flooring professionals and homeowners are ensured added safety and technical flexibility. The certificates and awards range from **slip resistance class R9-11, sport floor approval** and **kids toy compatibility** to sweat and **saliva resistance** and **EC1/EC2 very low VOC emission**.

The extremely long pot life of AQUASEAL® GREENSTAR offers an additional highlight. While traditional 2-component waterborne finishes have to be used within 2 hours after mixing, AQUASEAL® GREENSTAR offers a **minimum pot life of 18 hours**. When a wood finishing professional mistakenly mixes up too much product in the evening, they can **still use excess product the next morning** making assuring cost savings and bringing environmental waste to a minimum.

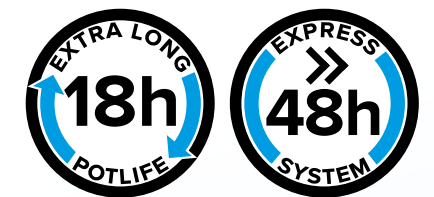

## The Advantages


- + No hazard labeling
- + Completely without isocyanate or aziridine
- + Requires no isocyanate protection measures
- + No CO<sub>2</sub> gases during reaction
- + Cork floor certified
- + Certified EC1/EC2 very low VOC emission
- + 2K commercial grade **top performance and resistance**
- + **water based** with **4 gloss levels**: ULTRAMAT, MAT/SATIN, SEMIGLOSS, GLOSS
- + **Outstanding 18 hours pot life** after mixture, **full cure** of finished floor after **48 hours**
- + **Sweat and saliva certified according** DIN 53160
- + **Skid resistance level R9 certified** acc. DGUV Regel 108-003/BGR 181 and DIN 51130 (**R10/R11 also certified with additive**)
- + **Sports floor certified** according DIN 18032-2 and **FIBA approved equipment** (sheen MAT/SATIN)
- + **Toy certified** according DIN EN 71-3
- + **Ideal also for PAK renovation** in combination with AQUASEAL® PAK STOP



# WATER-BASED SYSTEMS



## Hardwood-floor Finishes 2K

| Product                                                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Shelf Life | Giscode | Dry Time   | Application / Consumption                                                                                                                                                                              | Sheens / Color Shades / Art-No.   | Certificates / Approvals                                                                                                                              | Packaging                                                                                                   | Pallet                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------|
|   | <b>AQUASEAL® ROYALMAT</b> is a 2-component, waterborne, premium-class finishing product for hardwood-floors. It is based on polyurethane and offers outstanding resistance and an universal highend applicability. It features an extremely matt surface and therewith an almost invisible finishing result. Based on its special properties and elasticity, the product is approved for cork floors and also achieves outstanding chemical resistance. In addition to this product, we offer a specialized and harmonized field marking paint. Full use after 24 hours!     | 12 months* | W3/DD+  | 3-4 hrs.** | <br>Micro. Plus /<br>Univers. Roller<br>100-120 ml/m <sup>2</sup><br><br>Micro. Roller<br>70-90 ml/m <sup>2</sup>   | royalmat<br><br>XS41-0000-00C     | <br>DIN 51130 (R10)<br>(R11 with Add)<br>DIN 71-3<br>DIN 53160-1-2 | 5,5 l VE3<br>1,65 l VE6  | 63 x 5,5 l<br>180 x 1,65 l |
|  | <b>AQUASEAL® NATURALWHITE</b> is a 2-component, waterborne, premium-class finishing product for hardwood-floors. It is based on polyurethane and offers outstanding resistance and an universal highend applicability. It features an extremely matt surface and therewith an almost invisible finishing result. Based on its special properties and elasticity, the product is approved for cork floors and also achieves outstanding chemical resistance. In addition to this product, we offer a specialized and harmonized field marking paint. Full use after 24 hours! | 12 months* | W3/DD+  | 3-4 hrs.** | <br>Micro. Ultraslim /<br>Univers. Roller<br>100 ml/m <sup>2</sup><br><br>Micro. Roller<br>70-90 ml/m <sup>2</sup> | naturalwhite<br><br>XS41-90Q1-00C | <br>DIN 51130 (R10)<br>(R11 with Add)<br>DIN 71-3<br>DIN 53160-1-2 | 5,5 l VE3<br>1,65 l VE6  | 63 x 5,5 l<br>180 x 1,65 l |

## The Original: Truly invisible finishing Perfection.

- The original - truly invisible and simply beautiful!
- Particularly suitable for light wood species!
- Ready after 24 hours!
- Available also as a stain and oil!
- Performing the lowest possible gloss level on the globe!

- The original - truly invisible and simply beautiful!
- Particularly suitable for dark wood species!
- Ready after 24 hours!
- Performing the lowest possible gloss level on the globe!

**AQUASEAL®  
NATURALWHITE**


**AQUASEAL®  
ROYALMAT**



# WATER-BASED SYSTEMS



## Hardwood-floor Finishes 2K

| Product                                                                                                                                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Shelf Life | Giscode | Dry Time   | Application / Consumption                                                                                                                              | Sheens / Color Shades / Art-No.                                                                                                                                                                                                                                          | Certificates / Approvals                                                                                                                                              | Packaging                                                                                   | Pallet     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------|
|   | <b>AQUASEAL® SMARTSTAR</b> is a 2-component, water-based wood floor finish based on polyurethane with an outstanding price-performance ratio. Due to its very good resistance, AQUASEAL® SMARTSTAR is ideally suited for high-traffic areas. The floor surface can be fully used after a drying time of just 72 hours.                                                                                                                                                                                                                                                                                                                                                                                                   | 12 months* | W3/DD+  | 3-4 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>100-120 ml/m <sup>2</sup> | mat, semigloss<br><br>XS17-0000-01B (MA)<br>XS17-0000-03B (SG)                                                                                                                                                                                                           |                                                                                    | 5,5 l VE3                                                                                   | 63 x 5,5 l |
|                                                                                  | <b>AQUASEAL ELASTICSTAR</b> is a 2-component waterborne finish based on polyurethane for long-term protection. The product offers high resistance to wear and chemicals, it is tough-elastic and highly recommended for high-traffic floors. AQUASEAL ELASTICSTAR is suitable for smooth or structured PVC, CV, linoleum, rubber/caoutchouc and PU/PUR/expoxy coated floor coverings. AQUASEAL ELASTICSTAR is non-yellowing.                                                                                                                                                                                                                                                                                             | 12 months* | W3/DD+  | 2-3 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>40-60 ml/m <sup>2</sup>   | mat<br><br>XS45-0000-02C (Finish)<br>PW48-0000-04B (Hard.)                                                                                                                                                                                                               | <br>DIN 51130 (R9)<br>(R10 with Add)DGUV<br>108-003<br>DIN 18032-2<br>DIN EN 14904 | 5,5 l                                                                                       | 60 x 5,5 l |
|                                                                                 | <b>AQUASEAL ELASTICSTAR COLOR</b> is a 2-component waterborne finish based on polyurethane for long-term protection. The product offers high resistance to wear and colorless chemicals. Due to its high solid content and tough-elastic properties it is recommended for high-traffic floors. AQUASEAL ELASTICSTAR COLOR is suitable for the colored restoration of elastic floor coverings, such as smooth or structured PVC, CV, linoleum, rubber/caoutchouc and PU/PUR/expoxy coated. AQUASEAL ELASTICSTAR can also be used on sports floors and antiskid coverings. It is available in all RAL Classic, NCS-S, Sikkens 4041 as well as Pantone colors. Individual colors based on samples are available on request. | 12 months* | W3/DD+  | 2-3 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>40-60 ml/m <sup>2</sup> | mat<br><br>XS45-XXXX-02G<br><br>(Price valid for standard<br>pigmentation. Special colors<br>might differ in single cases)                                                                                                                                               |                                                                                  | 5,5 l  | 60 x 5,5 l |
|                                                                                 | <b>AQUASEAL ELASTICSTAR COLOR CHIPS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ∞ months*  | -       | -          | white<br>anthracite<br>black<br>yellow<br>orange<br>red<br>purple<br>blue<br>green<br>brown<br>light-medium gray                                       | 1 mm / 3 mm<br>1220A00A / 1230A00A<br>1221A00A / 1231A00A<br>1222A00A / 1232A00A<br>1223A00A / 1233A00A<br>1224A00A / 1234A00A<br>1225A00A / 1235A00A<br>1226A00A / 1236A00A<br>1227A00A / 1237A00A<br>1228A00A / 1238A00A<br>1229A00A / 1239A00A<br>1240A00A / 1241A00A |                                                                                  | 1 mm<br>100 g bag<br>VE10<br><br>3 mm<br>100 g bag<br>VE10                                  | -          |



# WATER-BASED SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!



## Hardwood-floor Finishes 1K

| Product                                                                                                                                                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Shelf Life | Giscode     | Dry Time   | Application / Consumption                                                                                                                                 | Sheens / Color Shades / Art-No.                                                                | Certificates / Approvals                                                                                                                                                 | Packaging                                                                                               | Pallet                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------|
| <br> | <b>AQUASEAL® ECOGOLD</b> is a waterborne 1-component wood floor finish with outstanding resistances and workability, based on acrylic and polyurethane dispersions for all traffic classes. Based on its special properties and elasticity, the product is also approved for cork floors and offers a wide range of certifications.                                                                                                                            | 15 months* | W2+         | 3-4 hrs.** | <br>Micro. Plus /<br>Univers. Roller<br>100-120 ml/m <sup>2</sup>      | mat, semigloss, gloss<br><br>XP29-0000-02C (MA)<br>XP29-0000-04C (SG)<br>XP29-0000-08C (GL)    | <br>DIN 71-3, DIN 53160,<br>DIN 51130 (R9)<br>(R10 with Add),<br>DIN EN 13501-1 (Efl) | 5 l VE4<br>1 l  VE10 | 96 x 5 l<br>280 x 1 l |
|                                                                                      | <b>AQUASEAL® ECOSILVER</b> is a water-borne 1-component wood floor finish for medium traffic areas with a very good price-performance ratio. Based on selected acrylic/polyurethane dispersions, this 1-component wood floor finish offers great properties and workability. The strong performance of three different gloss levels is outstanding in the industry.                                                                                            | 15 months* | W3+         | 3-4 hrs.** | <br>Micro. Plus /<br>Univers. Roller<br>100-120 ml/m <sup>2</sup>      | ultramat, mat, semigloss<br><br>XP11-0000-00C (UM)<br>XP11-0000-04C (MA)<br>XP11-0000-04C (SG) |                                                                                       | 5 l VE4                                                                                                 | 96 x 5 l              |
|                                                                                     | <b>AQUASEAL® SMARTHOME</b> is a waterborne wood floor finish for all normal traffic areas. Based on selected dispersion qualities, having a good price-quality-ratio. Its perfect mixture of quality dispersions guarantees an outstanding workability in the segment of price focused, but quality assured wood floor finishing.                                                                                                                              | 15 months* | W2+/<br>W3+ | 3-4 hrs.** | <br>Micro. Plus /<br>Univers. Roller<br>100-120 ml/m <sup>2</sup>     | ultramat, mat, semigloss<br><br>XP18-0000-00B (UM)<br>XP18-0000-02B (MA)<br>XP18-0000-04B (SG) | <br>(MA,SG)                                                                          | 5 l VE4                                                                                                 | 96 x 5 l              |
|                                                                                    | <b>AQUASEAL® NORDICWHITE</b> is a fast drying, water based 1K finishing product for indoor wooden surfaces. It creates an individually flexible build-up of a decent modern Nordic white look. The number of layers create the preferred level of white. AQUASEAL® NORDICWHITE allows an easy, controlled and safe application and create a wonderfully smooth white, ultramat surface. Overcoating with approved further Berger-Seidle® finishes is possible. | 15 months* | W3+         | 3-4 hrs.** | <br>Micro. Ultraslim /<br>Univers. Roller<br>70-90 ml/m <sup>2</sup> | ultramat<br><br>XP38-90R8-00C                                                                  |                                                                                     | 5 l VE4                                                                                                 | 96 x 5 l              |

## Problem-solvers and Special Systems

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                             | Shelf Life | Giscode | Dry Time                 | Application / Consumption                                                                                        | Sheens / Color Shades / Art-No. | Certificates / Approvals                                                                                     | Packaging                                                                                    | Pallet        |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|--------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|---------------|
|  | <b>AQUASEAL® LEVELGEL</b> is a high-quality troweling gel, soft as butter. It is used as an intermediate layer between the finishes, leading to a perfectly smooth surface after the final finishing layer. This problem solver is used to bridge imperfect surfaces.                                                                                                                                                                                   | 15 months* | W2+     | 30-60 min.**             | <br>15-20 ml/m <sup>2</sup> | XG10-0000-05L                   |                         | 5 l     | 54 x 5 l      |
|  | <b>AQUASEAL® ANTISLIP ADD</b> is a surface structure generator on the basis of ceramics for AQUASEAL® GREENSTAR, AQUASEAL® CERAMICSTAR, AQUASEAL® ROY-ALMAT, AQUASEAL® NATURALWHITE and AQUASEAL® ELASTICSTAR. One gets a high-abrasion resistant, highly chemicals resistant coating for high-traffic hardwood-floors. Together with AQUASEAL® ANTISLIP ADD additive the products meet the requirements of DIN 51130 with the anti-slip class R10/R11. | 36 months* | -       | Same as for the finish** |                                                                                                                  | ZZ21-0000-0A0                   | <br>DIN 51130 (R10/R11) | 0,2 kg  |               |
|  | <b>AQUASEAL® RETARDER</b> is an additive for slowing down the reaction speed of Berger-Seidle AQUASEAL water-based finishes. This product is recommended and useful for extremely dry and/or hot regions to normalize the finish's drying process. It helps to support a normal film building process.                                                                                                                                                  | 48 months* | -       | -                        | -                                                                                                                | ZZ03-0000-0AA                   |                         | 74 ml<br>(units of 25)                                                                       | 1600 x 74 ml  |
|  | <b>AQUASEAL® UV PLUS</b> is an additive that is added to water-based paints and protects wood from turning yellow caused by UV light. AQUASEAL® UV PLUS is particularly suitable for use on light-coloured wood.                                                                                                                                                                                                                                        | 6 months*  | -       | Same as for the finish** | max. 2% of finish                                                                                                | XZ15-0000-0AA                   |                         | 100 ml                                                                                       | 1600 x 100 ml |

# OIL SYSTEMS



## CLASSICOIL

The Berger-Seidle oil systems combine tradition with latest high-end technology level of today and the future.

Sustainable and steady improvement of health and environmental protection is achieved by natural raw materials and mild ingredients.

CLASSIC OIL systems combine these goals with the highest expectations and standards in terms of appearance, brilliance, and user friendliness. CLASSIC OIL options cover all categories from impregnating oils, oil-wax combinations up to hard wax oils. Furthermore, these can be combined with many further products in the Berger-Seidle range, such as SOLVSEAL or AQUASEAL products. The installer, the architect and the owner decide.

Outstanding is the endless color variety. Almost 60 standard colors are available and can be combined individually to endless new color shades - unique on the market. This basis of creativity leads to a whole new and individual wood flooring experience.

Premium oils offering endless possibilities.



# OIL SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!



## CLASSIC BASEOIL A Basis Characterized by High Quality and Universality

This CLASSIC OIL series product combines versatility in application with maximum environmental and consumer protection and occupational safety. Featuring a solid content of 100 vp, a very mild residual VOC and its renewable ingredients made of native oils, CLASSIC BASEOIL ranks among the most environmentally friendly oil-technique products.

CLASSIC BASEOIL was designed for easy, uniform application as well as intensive deep penetration. This makes it the perfect basis for oil. On this basis you can:

- a) work in one layer
- b) do the second layer as the top one in oil products (CLASSIC 100PROOIL, CLASSIC HARDOIL)
- c) build up multiple-layer coats with well-proven waterbased finish products

All exact system configurations of oil technique are listed in the module-system table on page 3 of the booklet CLASSIC OIL MODULE SYSTEM as well as in the data sheet.

In all cases we have the typical and much-loved oil look, i.e. grain enhancement and natural wood character. Because of its easy and even spreadability it is the most straightforward coloration technique with most intensive color effects made by Berger-Seidle. To shorten the drying time and to qualitatively improve the job at hand there is available, in case of need, the reactive agent CLASSIC PLUS. This is admixed and stirred in at the ratio 10:1.

## Overview of Advantages

### Mechanical-physical properties

- + Toy compliance as per DIN EN 71-3
- + Salvia and sweat compliance as per DIN 53160
- + Slip resistance as per DIN 51130 / BGR 181
- + Reduced edge-bonding and less side-bonding failures
- + Wear resistant surface
- + Impregnates deeply
- + Dirt-repellant
- + Highly elastic
- + Partial repairability (pure oil systems only)
- + Water-vapor impermeable
- + Extensive chem. resistancies

### Classic look with charm

- + Natural look
- + Accentuation of wood color and grain
- + A touch of tradition
- + Option to customize color shade

### Environment profile

- + 100 % solids (colorless)
- + Formula based on natural raw materials
- + Renewable raw materials
- + Resource-conserving due to low material consumption (about 20 to 50 g per sq m)
- + Drying with oxygen from air
- + Breathable



## CLASSIC BASEOIL COLOR SAMPLE SET

The world of colors, applied on oak, convenient and perfectly protected by the BERGER-SEIDLE SYSTAINER®:

The world of colors is now also available on premium sample sets. The CLASSIC BASEOIL COLOR SAMPLE SET consists of two exclusive, handmade samples made from white oak. The samples show all CLASSIC BASEOIL COLOR, standard and trend, for physical visualization and presentation of the final oak surface. The samples are perfectly protected by the premium BERGER-SEIDLE SYSTAINER® box for a safe transport to customers. Order now and take the chance to perfectly present the world of individual coloration!

## CLASSIC BASEOIL COLOR SAMPLE BOX

The world of colors available in a unique, sample kit, convenient and perfectly protected by the BERGER-SEIDLE SYSTAINER®:

The new unique CLASSIC BASEOIL COLOR SAMPLE CASE is an extremely convenient and fully equipped sample kit for the individual and flexible color shade sampling of all CLASSIC BASEOIL COLOR standard and trend colors. The kit contains more than 50 color sample cans, plus helpful application tools. The box is made of a solid wood construction, avoiding tilting of cans during transport completely. Existing colors can be presented and new color shades can be designed and created individually. The wooden box is perfectly protected by the matching premium BERGER-SEIDLE SYSTAINER® box for safe transport to customers. Order now and take the chance to perfectly present the world of individual coloration!



# OIL SYSTEMS



## Indoor Systems

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Shelf Life | Giscode | Dry Time  | Application / Consumption                                                                                                                                                     | Sheens / Color Shades / Art-No.                                                                                                  | Certificates / Approvals                                                                                                                                    | Packaging                                                                                                        | Pallet                     |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------|
|    | <b>CLASSIC BASEOIL</b> is a colorless penetrating oil for wood floors and other wooden surfaces. It is based on natural, sustainable raw materials. Can be combined with oils, oil/wax systems and with many selected wood floor finishes made by Berger-Seidle. CLASSIC BASEOIL meets the requirements of DIN 51130 class R9, R10 and R11 as to slip resistance covering an outstanding number of certifications! It is ready-to-use and can be used as 1K or 2K in combination with hardener CLASSIC PLUS.                                                                    | 36 months* | Ö10+    | 24 hrs.** | <br>Microfaser Roller / Schaumst. Roller / Superpad / Pad<br>30-50 ml/m <sup>2</sup> (Oak) | Nature /Colorless<br>KG40-0000-0AD                                                                                               | <br>DIN 71-3<br>DIN 53160<br>DIN 51130<br>(R9, R10, R11)<br>EG 1935/2004 | 5 l<br>1 l VE10<br>0,125 l    | 63 x 5 l<br>280 x 1 l<br>- |
|    | <b>CLASSIC BASEOIL COLOR</b> is a colored version of CLASSIC BASEOIL, available in a unique number of standard colors. The colors can be mixed individually to customize each single floor.                                                                                                                                                                                                                                                                                                                                                                                     | 36 months* | Ö40+    | 24 hrs.** | <br>Microfaser Roller / Schaumst. Roller / Superpad / Pad<br>30-50 ml/m <sup>2</sup> (Oak) | The color palette and article numbers can be found on page 54/55.                                                                | <br>DIN 71-3<br>DIN 51130<br>(R9, R10, R11)                              | 5 l<br>1 l VE10<br>0,125 l    | 63 x 5 l<br>280 x 1 l<br>- |
|   | <b>CLASSIC BASEOIL COLOR SAMPLE BOX</b> is a complete ready-to-use sample case for the individual and flexible color sampling of all our different CLASSIC BASEOIL COLOR shades. It contains over 50 color samples and many helpful testing tools. With it, not just existing ready-to-use colors can be presented, but also an endless number of individual shades can be mixed and created together with the customer. The box is made of solid wood and is perfectly packed in a high quality BERGER-SEIDLE SYSTAINER® box for the safe transport to customers and meetings. | 24 months* | Ö40+    | 24 hrs.** |                                                                                            | 1210 A00A (complete)<br><br>1018 A00A<br>(SYSTAINER®-Insert, empty)<br><br>1023 A00A<br>(BERGER-SEIDLE SYSTAINER®, large, empty) | <br>DIN 71-3                                                             | 0,125 l                       | -                          |
|  | <b>CLASSIC BASEOIL COLOR SAMPLE SET</b> includes two handmade, premium quality color presenters made of solid wood. The samples show all CLASSIC BASEOIL COLORS, standard and trend as well, and their appearance on oak, beech and maple for a physical impression. The samples are perfectly protected in a practical premium BERGER-SEIDLE SYSTAINER® box for the safe transport to customers and meetings.                                                                                                                                                                  | -          | -       | -         | -                                                                                                                                                                             | 1209 A00A (oak)<br>1246 A00A (beech)<br>1248 A00A (maple)<br>1207 A00A (oak)<br>1245 A00A (beech)<br>1247 A00A (maple)           | -                                                                                                                                                           | with SYSTAINER®<br><br>without SYSTAINER®                                                                        | -                          |
|  | <b>CLASSIC 100PROOIL</b> is an ecological deep impregnation oil-wax-system with 100% solid content. It is based on natural sustainable raw materials. Perfect brilliance and great resistances are achieved by this fine-tuned oil-wax-combination. CLASSIC 100PROOIL meets the requirements of DIN 51130 class R9 and R10 as to slip resistance.                                                                                                                                                                                                                               | 36 months* | Ö10+    | 12 hrs.** | <br>Trowel / Superpad / Pad<br>30-50 ml/m <sup>2</sup> (Oak)                             | KG43-0000-0AI                                                                                                                    | <br>DIN 71-3<br>DIN 53160<br>DIN 51130<br>(R9, R10)                    | 5 l<br>1 l VE10<br>0,125 l  | 63 x 5 l<br>280 x 1 l<br>- |
|  | <b>CLASSIC HARDOIL</b> is a natural, layer building, fast drying deep impregnation with a perfectly uniform matt look. It is made on basis of oils and resins from sustainable raw materials; CLASSIC HARDOIL will be applied in 2 coats. Suitable for high-traffic areas. CLASSIC HARDOIL meets the requirements of DIN 51130 class R9, R10 and R11 as to slip resistance.                                                                                                                                                                                                     | 24 months* | Ö60     | 24 hrs.** | <br>Microfaser Roller / Universal Roller / Trowel / Pad<br>30-50 ml/m <sup>2</sup> (Oak) | KG53-0000-01B                                                                                                                    | <br>DIN 51130<br>(R9, R10)                                             | 5 l<br>1 l VE10                                                                                                  | 63 x 5 l<br>300 x 1 l      |
|  | <b>CLASSIC PLUS</b> is for accelerating the drying process and improving the quality of CLASSIC BASEOIL, CLASSIC BASEOIL COLOR, CLASSIC HARDOIL and SOLVSEAL LT EXPORT® EXTRA. We recommend adding 10%.                                                                                                                                                                                                                                                                                                                                                                         | 12 months* | -       | -         | -                                                                                                                                                                             | KW04-0000-0AH                                                                                                                    |                                                                        | 0,5 l<br>100 ml                                                                                                  | 480 x 0,5 l<br>-           |
|  | <b>CLASSIC BIOLAUGE</b> is used for the preparatory lye treatment of wood prior to oiling with CLASSIC BASEOIL or prior to the classical soap treatment of coniferous woods with CLASSIC BIOSOAP. It reacts with the natural, biological wood ingredients. With it, the woods absorb greatly CLASSIC BASEOIL, CLASSIC BASEOIL COLOR shows even more intense colors. CLASSIC BIO-LAUGE darkens oak wood; after oiling an antique effect is achieved. Coniferous woods darken similar to the natural light.                                                                       | 24 months* | -       | 24 hrs.** | <br>Universal Roller<br>100-110 ml/m <sup>2</sup>                                        | ZZ19-0000-0AA                                                                                                                    |                                                                        | 1 l VE10                    | 280 x 1 l                  |

# OIL SYSTEMS



## CLASSIC BASEOIL COLOR Standard Colors

|                                                                      |                                                  |                                                       |
|----------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------------|
| <b>Natur / Nature</b><br><b>Farblos / Colorless</b><br>KG40-0000-0AD | <b>Azobe</b><br>KG40-80D1-0AD                    | <b>Naturweiss / Natural White</b><br>KG40-90Q1-0AD    |
| <b>Pinie / Pine</b><br>KG40-8085-0AD                                 | <b>Rauch / Smoke</b><br>KG40-80C7-0AD            | <b>Reinweiss / Pure White</b><br>KG40-9010-0AD        |
| <b>Eiche / Oak</b><br>KG40-80C9-0AD                                  | <b>Eiche Rustikal / Old Oak</b><br>KG40-80J8-0AD | <b>Kaschmirweiß / Cashmere White</b><br>KG40-90L4-0AD |
| <b>Pernambuk / Pernambuco</b><br>KG40-80J9-0AD                       | <b>Nussbaum / Walnut</b><br>KG40-8081-0AD        | <b>Platingrau / Platinum Grey</b><br>KG40-7036-0AD    |
| <b>Teak</b><br>KG40-8086-0AD                                         | <b>Ebenholz / Ebony</b><br>KG40-90J3-0AD         | <b>Grüngrau / Green Grey</b><br>KG40-60Z6-0AD         |
| <b>Padouk / Bastard Teak</b><br>KG40-90K0-0AD                        | <b>Wenge</b><br>KG40-8074-0AD                    | <b>Basaltgrau / Basalt Grey</b><br>KG40-7012-0AD      |

|                                                   |                                                |                                                          |
|---------------------------------------------------|------------------------------------------------|----------------------------------------------------------|
| <b>Schilfgrün / Reed Green</b><br>KG40-6013-0AD   | <b>Zitronengelb / Lemon</b><br>KG40-1012-0AD   | <b>Rot / Red</b><br>KG40-30D9-0AD                        |
| <b>Zementgrau / Cement Grey</b><br>KG40-7033-0AD  | <b>Rotorange / Red Orange</b><br>KG40-2001-0AD | <b>Violett / Violet</b><br>KG40-40B1-0AD                 |
| <b>Silbergrau / Silver Grey</b><br>KG40-7001-0AD  | <b>Blau / Blue</b><br>KG40-50Z3-0AD            | <b>Taubenblau / Dove Blue</b><br>KG40-5014-0AD           |
| <b>Graubraun / Grey Brown</b><br>KG40-8019-0AD    | <b>Grün / Green</b><br>KG40-60Z8-0AD           | <b>Pastelltürkis / Pastel Turquoise</b><br>KG40-60W0-0AD |
| <b>Schwarz / Black</b><br>KG40-9005-0AD           | <b>Altrosa / Old Pink</b><br>KG40-3014-0AD     | <b>Weinrot / Burgundy</b><br>KG40-3005-0AD               |
| <b>Extraschwarz / Deep Black</b><br>KG40-4060-0AD | <b>Orange</b><br>KG40-2054-0AD                 |                                                          |

## CLASSIC BASEOIL COLOR Trend Colors

|                                                  |                                                  |                                                             |
|--------------------------------------------------|--------------------------------------------------|-------------------------------------------------------------|
| <b>Cappuccino / Cappucino</b><br>KG40-80P4-0AD   | <b>Olive</b><br>KG40-60BM-0AD                    | <b>Salbei / Salvia</b><br>KG40-60BK-0AD                     |
| <b>Pperlweiss / Pearl White</b><br>KG40-10Q2-0AD | <b>Cape Cod Antique</b><br>KG40-70Q1-0AD         | <b>Alaska Treibholz / Alaska Driftwood</b><br>KG40-70Q2-0AD |
| <b>Vanille / Vanilla</b><br>KG40-10Q3-0AD        | <b>Dünensand / Dune Sand</b><br>KG40-10Q4-0AD    | <b>Karamell / Caramel</b><br>KG40-80P6-0AD                  |
| <b>Weißeiche / White Oak</b><br>KG40-90R0-0AD    | <b>Ultra Weiß / Ultra White</b><br>KG40-90R9-0AD |                                                             |

|                                             |                                             |                                         |
|---------------------------------------------|---------------------------------------------|-----------------------------------------|
| <b>Gletscher / Glacier</b><br>KG40-10Q5-0AD | <b>Eisblau / Ice Blue</b><br>KG40-50Y4-0AD  | <b>Lagune / Laguna</b><br>KG40-50Y7-0AD |
| <b>Magnolie / Magnolia</b><br>KG40-30P1-0AD | <b>Latte Macchiato</b><br>KG40-80P5-0AD     | <b>Pink Lady</b><br>KG40-30P2-0AD       |
| <b>Minze / Mint</b><br>KG40-60BL-0AD        | <b>Karibik / Caribbean</b><br>KG40-50Y5-0AD | <b>Ozean / Ocean</b><br>KG40-50Y6-0AD   |

The development of customized shades is possible, we just invoice the really needed hours on the cost basis of 140 Euro/h plus material costs. The possibilities of printing to reproduce colors are limited. For this reason, slight differences may occur between the colors printed and the true shades. Depending on the type of wood, deviations may occur. We therefore recommend making samples for approval in any case.

# OIL SYSTEMS



## Indoor Systems

| Product                                                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Shelf Life | Giscode | Dry Time                            | Application / Consumption                                                                                                                                                | Sheens / Color Shades / Item-No.                                                                                                                                             | Certificates / Approvals                                                            | Packaging                                 | Pallet        |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------|
|   | <p><b>CLASSIC EXPRESSSTAIN COLOR</b> is a fast-drying stain, based on quality oil modified resins, with a high level of renewable raw materials, CLASSIC EXPRESSSTAIN COLOR corresponds to the latest resin technology for solvent-based stains and offers over 30 different colors. The product is free of any dryers containing cobalt and solvents containing aromatics. The fast-drying properties are outstanding, overcoating can be done quickly. CLASSIC EXPRESSSTAIN COLOR is easy to apply and excellent to work with. The penetrating stain is technically a sealer, reduces side-bonding effects and is a perfect base for all AQUACHOICE® water-based finishes.</p> | 24 months* |         | - 2-16 hrs.**<br>depending on color | <br>brush, trim pad, soft towels, or carpet pad driven by a buffer<br>800-1000 sf/gal | KG34-XXXX-0AD (see list)                                                                                                                                                     |  | 5l<br><br>1l VE10                         | 63<br><br>300 |
|  | <p><b>CLASSIC EXPRESSSTAIN COLOR SAMPLE SET</b> includes a handmade, premium quality color presenters made of solid wood. The samples show all CLASSIC EXPRESSSTAIN COLORS and their appearance on oak, white oak, red oak and maple for a physical impression. The samples are perfectly protected in a practical premium BERGER-SEIDLE SYSTAINER® box for the safe transport to customers and meetings.</p>                                                                                                                                                                                                                                                                    | -          | -       | -                                   | -                                                                                                                                                                        | 1408 A00A (oak large)<br>1409 A00A (maple large)<br><br>1402 A00A (white oak small)<br>1403 A00A (red oak small)<br>1404 A00A (maple small)<br>1405 A00A (maple sport small) | -                                                                                   | with SYSTAINER®<br><br>without SYSTAINER® | -             |



# OIL SYSTEMS



## CLASSIC EXPRESSSTAIN COLOR

|                                            |                                    |                                         |
|--------------------------------------------|------------------------------------|-----------------------------------------|
| <b>Nature / Colorless</b><br>KG34-0000-0AD | <b>Golden Oak</b><br>KG34-H0D7-0AD | <b>Ultra White</b><br>KG34-90R9-0AD     |
| <b>Pine</b><br>KG34-8085-0AD               | <b>Azobe</b><br>KG34-80D1-0AD      | <b>Country White</b><br>KG34-J080-0AD   |
| <b>Sedona Red</b><br>KG34-C057-0AD         | <b>Oak</b><br>KG34-80C9-0AD        | <b>White Oak</b><br>KG34-90R0-0AD       |
| <b>Red Orange</b><br>KG34-2001-0AD         | <b>Old Oak</b><br>KG34-80J8-0AD    | <b>Nature Grey</b><br>KG34-G0H2-0AD     |
| <b>Deep Sedona Red</b><br>KG34-30P5-0AD    | <b>Pernambuco</b><br>KG34-80J9-0AD | <b>Natural White</b><br>KG34-90Q1-0AD   |
| <b>Wenge</b><br>KG34-8074-0AD              | <b>Walnut</b><br>KG34-8081-0AD     | <b>Latte Macchiato</b><br>KG34-80P5-0AD |
| <b>Provincial</b><br>KG34-8049-0AD         | <b>Ebony</b><br>KG34-J079-0AD      | <b>Rustic Beige</b><br>KG34-G0H1-0AD    |
| <b>Bark</b><br>KG34-80S7-0AD               | <b>True Black</b><br>KG34-J081-0AD | <b>Classic Grey</b><br>KG34-G0G9-0AD    |

|                                     |                                        |                                        |
|-------------------------------------|----------------------------------------|----------------------------------------|
| <b>Grey</b><br>KG34-70A7-0AD        | <b>Jacobean</b><br>KG34-H0D4-0AD       | <b>Espresso Brown</b><br>KG34-H0D3-0AD |
| <b>Silver Grey</b><br>KG34-7001-0AD | <b>Early American</b><br>KG34-H0C8-0AD | <b>Antique Brown</b><br>KG34-H0D1-0AD  |
| <b>Dove Blue</b><br>KG34-5014-0AD   | <b>Special Walnut</b><br>KG34-H0C9-0AD | <b>Coffee Brown</b><br>KG34-H0D2-0AD   |
| <b>Laguna</b><br>KG34-50Y7-0AD      | <b>Nutmeg</b><br>KG34-H0D5-0AD         | <b>Dark Walnut</b><br>KG34-H0D8-0AD    |
|                                     | <b>Medium Brown</b><br>KG34-H0D6-0AD   | <b>Black</b><br>KG34-9005-0AD          |



The development of customized shades is possible, we just invoice the really needed hours on the cost basis of 140 Euro/h plus material costs. The possibilities of printing to reproduce colors are limited. For this reason, slight differences may occur between the colors printed and the true shades. Depending on the type of wood, deviations may occur. We therefore recommend making samples for approval in any case.

# OIL SYSTEMS



## Outdoor Systems

| Product | Description                                                                                                                                                                                                                                                                                                                                                                                            | Shelf Life | Giscode | Dry Time     | Application / Consumption                          | Sheens / Color Shades / Art-No.                                        | Certificates / Approvals  | Packaging                  | Pallet                     |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|--------------|----------------------------------------------------|------------------------------------------------------------------------|---------------------------|----------------------------|----------------------------|
|         | <b>CLASSIC OUTDOOROIL</b> is a colorless high-solid, environmentally friendly impregnation oil, based on native oils, designed for wood areas in outdoor locations. It exhibits deep penetration and excellent care effect. OUTDOOROIL® NATURE protects the wood and makes the wood surfaces repel dirt and water. Colorless, stresses the natural characteristic color of the individual wood specie. | 36 months* | Ö60+    | 10-14 hrs.** | <br>Broad Brush / Brush<br>40-70 ml/m <sup>2</sup> | Colorless<br><br>KG90-0000-0AD                                         | <br>DIN 71-3<br>DIN 53160 | 3 l<br>1 l VE10<br>0,125 l | 75 x 3 l<br>280 x 1 l<br>- |
|         | <b>CLASSIC OUTDOOROIL COLOR</b> is a colored high-solid, environmentally friendly impregnation oil based on native oils, designed for wood areas in outdoor locations. It exhibits deep penetration and excellent care effect. OUTDOOROIL® PINE / BANGKIRAI protects the wood and makes the wood surfaces repel dirt and water. It is available in various standard colors.                            | 36 months* | Ö60+    | 10-14 hrs.** | <br>Broad Brush / Brush<br>40-70 ml/m <sup>2</sup> | The color palette and article numbers can be found below on this page. | <br>DIN 71-3              | 3 l<br>1 l VE10<br>0,125 l | 75 x 3 l<br>280 x 1 l<br>- |



## Classic OutdoorOil COLOR

|                                              |                                            |                                           |                                            |                                            |                                            |                                            |
|----------------------------------------------|--------------------------------------------|-------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|
| FARBLOS<br>1-schichtig<br>KG90 000A DJ10     | NATURWEISS<br>1-schichtig<br>KG90-90Q1-0AD | REINWEISS<br>1-schichtig<br>KG90-9010-0AD | SILBERGRAU<br>1-schichtig<br>KG90-7001-0AD | GRAU<br>1-schichtig<br>KG90-70A7-0AD       | BASALTGRAU<br>1-schichtig<br>KG90-7012-0AD | SCHWARZ<br>1-schichtig<br>KG90-4060-0AD    |
| FARBLOS<br>2-schichtig<br>KG90 000A DJ10     | NATURWEISS<br>2-schichtig<br>KG90-90Q1-0AD | REINWEISS<br>2-schichtig<br>KG90-9010-0AD | SILBERGRAU<br>2-schichtig<br>KG90-7001-0AD | GRAU<br>2-schichtig<br>KG90-70A7-0AD       | BASALTGRAU<br>2-schichtig<br>KG90-7012-0AD | SCHWARZ<br>2-schichtig<br>KG90-4060-0AD    |
| KIEFER<br>1-schichtig<br>KG90-8077-0AD       | PINIE<br>1-schichtig<br>KG90-10X7-0AD      | PERNAMBUK<br>1-schichtig<br>KG90-80J9-0AD | TEAK<br>1-schichtig<br>KG90-80L2-0AD       | PADOUK<br>1-schichtig<br>KG90-90K0-0AD     | NUSSBAUM<br>1-schichtig<br>KG90-8081-0AD   | PALISANDER<br>1-schichtig<br>KG90-80L3-0AD |
| KIEFER<br>2-schichtig<br>KG90-8077-0AD       | PINIE<br>2-schichtig<br>KG90-10X7-0AD      | PERNAMBUK<br>2-schichtig<br>KG90-80J9-0AD | TEAK<br>2-schichtig<br>KG90-80L2-0AD       | PADOUK<br>2-schichtig<br>KG90-90K0-0AD     | NUSSBAUM<br>2-schichtig<br>KG90-8081-0AD   | PALISANDER<br>2-schichtig<br>KG90-80L3-0AD |
| ZITRONENGELB<br>1-schichtig<br>KG90-1012-0AD | ROT<br>1-schichtig<br>KG90-30D9-0AD        | GRÜN<br>1-schichtig<br>KG90-60Z8-0AD      | BLAU<br>1-schichtig<br>KG90-50Z3-0AD       | TAUBENBLAU<br>1-schichtig<br>KG90-5014-0AD | KARMINROT<br>1-schichtig<br>KG90-C039-0AD  | OLIVGRÜN<br>1-schichtig<br>KG90-6047-0AD   |
| ZITRONENGELB<br>2-schichtig<br>KG90-1012-0AD | ROT<br>2-schichtig<br>KG90-30D9-0AD        | GRÜN<br>2-schichtig<br>KG90-60Z8-0AD      | BLAU<br>2-schichtig<br>KG90-50Z3-0AD       | TAUBENBLAU<br>2-schichtig<br>KG90-5014-0AD | KARMINROT<br>2-schichtig<br>KG90-C039-0AD  | OLIVGRÜN<br>2-schichtig<br>KG90-6047-0AD   |

The possibilities of printing to reproduce colors are limited. For this reason, slight differences may occur between the colors printed and the true shades. Depending on the type of wood, deviations may occur. We therefore recommend making samples for approval in any case.

# SOLVENT-BASED SYSTEMS



## SOLVSEAL

Water-based finishes of the AQUASEAL family represents today the highest and most modern standard for finishing of wooden floors - and are therefore preferable to solvent-based alternatives.

However, for special reasons and cases, still the classic solvent-based finish or product is often required. In these cases, the solution must be also fully reliable and as mild and safe as possible.

The classic Berger-Seidle wood floor finishing systems of the SOLVSEAL line convince for over half a century by the highest quality, best results and are extremely proven and popular in practice. Despite the solvent based nature of this category, they have been continuously developed and upgraded by milder and more modern components, to ensure maximum health protection here.

Therefore, the program covers especially mild, natural oil based and sustainable raw materials. This leads to products with the highest possible solid content, and that means minimal solvents. All this comes with great workability, reliability and the best possible health protection within this category.

SOLVSEAL products represent the leading quality level in this category on the market with excellent performance and reputation in the professional world.

The traditional and powerful premium finishing for wood floors.



# SOLVENT-BASED SYSTEMS



## Wood-filler Solutions & Primers

| Product                                                                           | Description                                                                                                                                                                                                                                                                         | Shelf Life | Giscode | Dry Time     | Application / Consumption                                                                                                            | Sheens / Color Shades / Art-No. | Certificates / Approvals                                                                                                                                                | Packaging                                                                                               | Pallet                |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|--------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------|
|  | <b>SOLVSEAL PAFUKISUPER</b> is a solvent-based, colorless wood floor filler with excellent filling properties. The wood color shade is achieved by admixing the matching wood fine dust.                                                                                            | 15 months* | G2      | -            | <br>Trowel<br>50 ml/m <sup>2</sup>                | BG09-S000-0AI                   |                                                                                      | 5 l VE4<br>1 l  VE10 | 96 x 5 l<br>300 x 1 l |
|  | <b>SOLVSEAL UNIQUICKPRIMER</b> is a alcohol based sealer with grain enhancement property, properties. Suitable for use underneath almost all water- and solvent-based wood floor finishes made by Berger-Seidle. It isolates strongly the wood ingredients of various wood species. | 15 months* | G2      | 45-60 min.** | <br>Universal Roller<br>110-120 ml/m <sup>2</sup> | BG02-S000-0AB                   |   | 5 l VE4                                                                                                 | 96 x 5 l              |

## Hardwood-floor Finishes

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                            | Shelf Life | Giscode | Dry Time     | Application / Consumption                                                                                                              | Sheens / Color Shades / Art-No.                                                                                                                                                                                          | Certificates / Approvals                                                                                                                                                                   | Packaging | Pallet    |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|--------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|
|  | <b>SOLVSEAL LT EXPORT EXTRA</b> is a certified, skid-resistant wood floor finish, according DIN 18032-2 and suitable for sport areas. It is based on oil-modified urethanes and is ideal for wood paving, under-floor heating, industrial parquet and planks. For this product we offer a matched sport marking paint. | 30 months* | KH1     | 10-12 hrs.** | <br>Universal Roller<br>100-120 ml/m <sup>2</sup> | ultramat  , mat/satin, semigloss, gloss<br><br>KP65-0000-00B (UM)<br>KP65-0000-02B (MA)<br>KP65-0000-04B (SG)<br>KP65-0000-08B (GL) |  <br>DIN 18032-2 | 10 l      | 30 x 10 l |



## BRILLIANCE

A hardwood floor is beautiful and a great individual masterpiece of installers' work.

To keep this beauty and brilliance even during everyday cleaning, maintenance and care, the right and perfectly matched care system is essential. Unknown third-party products are not matched, often ineffective or too aggressive – both harming the great surface of the floor.

Therefore, the perfectly matched, proven and tested maintenance and care products are needed and important – to chemically, physically and technically keep the floor's beauty for a very long time.

Berger-Seidle's maintenance and care products meet the highest demands in quality, comfort, ecology and beauty of the floor. They are exactly matched and tested with the whole program of finishing products, offering a solution for every case of finish and preference. Special products, for instance such as antistatic or sport versions, offer additional worlds of individually visual and functional floor maintenance.

Universal usage and high quality raw materials lead to an outstanding performance – being popular and well-proven since decades.

Beautiful floors of lasting value with the perfectly matched maintenance system



# MAINTENANCE & CARE SYSTEMS



## Maintenance & Care Systems for sealed surfaces

| Product | Description                                                                                                                                                                                                                                                                                                                     | Shelf Life | Giscode          | Dry Time | Application / Consumption                                                    | Sheens / Color Shades / Art-No.                          | Certificates / Approvals | Packaging           | Pallet                |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------|----------|------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------|---------------------|-----------------------|
|         | The <b>BRILLIANCE STARTERSET 1</b> is perfectly matched to your beautiful, newly renovated wooden floor. It contains the cleaning product Brilliance NEUTRAL-CLEANER and the maintenance product BRILLIANCE EVERCLEAR. Both products are precisely matched to the needs of the sealing finish you have selected for your floor. | 24 months* | GU50 / -<br>GE10 | -        | Please refer single products                                                 | 1242-A00A                                                |                          | 2 x 1l              | 144 x 2l              |
|         | <b>BRILLIANCE EVERCLEAR</b> is a polish-free, slip resistant care product for finished wood surfaces, cork, plastics and linoleum used undiluted or admixed to cleaning water. The glossy version is certified according DIN 18032 for sport arenas and gyms. Thus, it also covers the former product version „STOP“.           | 24 months* | GE10             | -        | CARE APPLICATOR<br>30-40 ml/m <sup>2</sup><br>(Undiluted)                    | gloss<br>ZX02-S000-0AO<br><br>mat/satin<br>ZX02-0000-03A | <br>DIN 18032            | 5 l<br>1 l VE10     | 96 x 5 l<br>280 x 1 l |
|         | <b>BRILLIANCE CLEANER L94</b> is a strong basic cleaner for removal of heavy dirt and old, dirty maintenance layers on finished wood floors. It can be used pure or diluted with cleaning water. It is designed for solvent-resistant, finished surfaces, manually or by cleaning machines.                                     | 48 months* | GU50             | -        | Cloth / Rag<br>20 ml/m <sup>2</sup><br>(Undiluted)                           | ZZ09-S000-0AA                                            |                          | 5 l Set<br>1 l VE10 | 60 x 5 l<br>280 x 1 l |
|         | <b>BRILLIANCE NEUTRALCLEANER</b> is a concentrated cleaning product for easier dirt removal. It can be used on oiled, oiled/waxed and finished floors. Usage in conjunction with the BERGERTOOL SPRAYMOP COMFORTCLEAN as well as separately is recommended.                                                                     | 24 months* | GU50             | -        | BRILLIANCE SPRAYMOP<br>COMFORTCLEAN                                          | ZZ29-0000-0AA                                            |                          | 5 l Set<br>1 l VE10 | 60 x 5 l<br>280 x 1 l |
|         | <b>BRILLIANCE BIOCLEAN</b> is used especially for wet cleaning of sealed and oiled parquet, but also for other floors, doors, window frames and plastic surfaces. The product is available as a concentrate. The product is particularly suitable for use in mopping robots and other floor cleaning machines.                  | 24 months* | GU50             | -        | BRILLIANCE SPRAYMOP<br>COMFORTCLEAN,<br>mopping robots,<br>cleaning machines | ZZC1-000A-AF10                                           |                          | 1 l VE10            | 280 x 1 l             |

### Brilliance SprayMop ComfortClean Comfortable Maintenance and Care every Day

The **BRILLIANCE SPRAYMOP COMFORTCLEAN** is your ideal every-day help for the maintenance and care of your premium wood floor or other floor surface. With its ergonomic design and functionality the need to go down on the floor is reduced to a minimum and increases the cleaning effect at the same time. The fine spraying leads to a well-controlled humidity level on the floor, and prevents from harmful ponding. The right tool and helping friend for comfort and long-term beauty of your floor.

### Flexible, long-lasting and effective

The high-quality and handy construction offers a long-term usability. The tank can be refilled again and again with the matching maintenance and care products of Berger-Seidle. New covers are available to replace the old ones, if they are getting older, to keep the high cleaning properties for an efficient cleaning.

### Cleaning and Protection with the matching Cleaner

Using the matching, tested and well-proven cleaner **BRILLIANCE NEUTRALCLEANER** offers an optimum cleaning result. Effective and reliably removing dirt, but at the same time mild enough to not harm the surface and beauty of the floor. With **BRILLIANCE NEUTRALCLEANER**, you avoid those risks and get the result you expect. The product can be used for both finished and oiled/waxed surfaces. For oiled/waxed floors, **BRILLIANCE BIOSOAP** is another popular and matching product.



# MAINTENANCE & CARE SYSTEMS



## Maintenance & Care Systems for oiled surfaces

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                            | Shelf Life | Giscode     | Dry Time     | Application / Consumption                                                    | Sheens / Color Shades / Art-No.                                                                                                                                                                                                                      | Certificates / Approvals                                                                                                                                                    | Packaging                               | Pallet                               |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|--------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|--------------------------------------|
|    | The <b>BRILLIANCE STARTERSET 2</b> is perfectly matched to your beautiful, newly renovated wooden floor. It contains the cleaning product BRILLIANCE NEUTRAL-CLEANER and the maintenance product BRILLIANCE AQUAOILCARE. Both products are precisely matched to the needs of the impregnated finish you have selected for your floor.                                                                                                  | 24 months* | GU50 / Ö10+ | -            | Please refer single products                                                 | 1243-A00A                                                                                                                                                                                                                                            |                                                                                          | 2 x 1l                                  | 144 x 2l                             |
|    | <b>BRILLIANCE OILCARE</b> is an oil/wax care product for oil-impregnated wooden surfaces. The product can also be sprayed and is particularly suitable for use in high-traffic areas. It perfectly refreshes the look of oiled surfaces.                                                                                                                                                                                               | 36 months* | Ö60+        | 16-24 hrs.** | Pad / Rag<br>5-20 ml/m <sup>2</sup>                                          | KZ04-0000-0AA<br><br>NATURALWHITE<br>KZ04-90Q1-0AA <br>WEISS<br>KZ04-9010-0AA  |       | 1l VE10<br><br>1l NW VE10<br>1l WH VE10 | 300 x 1l<br><br>300 x 1l<br>300 x 1l |
|   | <b>BRILLIANCE AQUAOILCARE</b> is the water based, non-polish everyday care product for oil impregnated wooden surfaces. It is not self-flammable, very easy to apply and offers a beautiful, matt wooden surface with long-lasting care effect. BRILLIANCE AQUAOILCARE is fast drying and re-impregnates the wood. Small scratches are covered and "healed", new scratches are reduced by a self-healing effect up to a certain point. | 12 months* | Ö10+        | -            | CARE APPLICATOR<br>30-40 ml/m <sup>2</sup>                                   | ZX20-0000-0AA                                                                                                                                                                                                                                        |       | 1l VE10                                 | 300 x 1l                             |
|  | <b>BRILLIANCE AQUASATINPOLISH</b> is a water-based polishable care product for oiled and oiled/waxed parquet and hardwood-floors. Environmentally friendly, well polishable, good maintenance effect.                                                                                                                                                                                                                                  | 24 months* | GE10        | -            | CARE APPLICATOR<br>30-40 ml/m <sup>2</sup>                                   | ZX05-S000-0A0                                                                                                                                                                                                                                        |   | 5 l<br>1l VE10                          | 96 x 5 l<br>280 x 1l                 |
|  | <b>BRILLIANCE BIOSOAP</b> is a wood-floor soap for wet cleaning and maintenance of oiled and oiled/waxed parquet and wooden floors. The product is based on natural and sustainable raw materials. The version „white“ leads to a beautiful "Scandinavian soap surface".                                                                                                                                                               | 24 months* | GU50        | -            | -                                                                            | ZZ13-0000-0AC<br><br>WHITE<br>ZZ13-9010-0AC                                                                                                                     |                                                                                        | 5 l<br>1l VE10<br><br>1l VE10           | 96 x 5 l<br>280 x 1l<br><br>280 x 1l |
|  | <b>BRILLIANCE FITPOLISH</b> is a wax-containing care product for finished, oiled and waxed hardwood-floors as well as for other solvent-resistant surfaces (stone, plastic etc.); requires buffing after application. Contains solvents.                                                                                                                                                                                               | 24 months* | GH10        | -            | Sponge / Cloth<br>7-13 ml/m <sup>2</sup>                                     | ZX03-S000-0A0                                                                                                                                                                                                                                        |                                                                                        | 1l VE10                                 | 300 x 1l                             |
|  | <b>BRILLIANCE NEUTRALCLEANER</b> is a concentrated cleaning product for easier dirt removal. It can be used on oiled, oiled/waxed and finished floors. Usage in conjunction with the BERGERTOOL SPRAYMOP COMFORTCLEAN as well as separately is recommended.                                                                                                                                                                            | 24 months* | GU50        | -            | BRILLIANCE SPRAYMOP<br>COMFORTCLEAN                                          | ZZ29-0000-0AA                                                                                                                                                                                                                                        |                                                                                        | 5 l Set<br>1l VE10                      | 60 x 5 l<br>280 x 1l                 |
|  | <b>BRILLIANCE BIOCLEAN</b> is used especially for wet cleaning of sealed and oiled parquet, but also for other floors, doors, window frames and plastic surfaces. The product is available as a concentrate. The product is particularly suitable for use in mopping robots and other floor cleaning machines.                                                                                                                         | 24 months* | GU50        | -            | BRILLIANCE SPRAYMOP<br>COMFORTCLEAN,<br>mopping robots,<br>cleaning machines | ZZC1-000A-AF10                                                                                                                                                                                                                                       |                                                                                        | 1l VE10                                 | 280 x 1l                             |

# MAINTENANCE & CARE SYSTEMS



## Special Systems

| Product | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Shelf Life | Giscode | Dry Time | Application / Consumption | Sheens / Color Shades / Art-No.                              | Certificates / Approvals | Packaging                                          | Pallet       |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|----------|---------------------------|--------------------------------------------------------------|--------------------------|----------------------------------------------------|--------------|
|         | <b>BRILLIANCE FILLANDFINISH</b> is the joint protection/impregnation protecting against the penetration of moisture through the head and side joints of prefinished wood floor elements. This is very important for wood with its high moisture sensitivity.                                                                                                                                                                                                                                                                                           | 24 months* | GH10    | -        | 10-15 g/m <sup>2</sup>    | OX02-0000-0AL                                                |                          | 500 ml                                             | 560 x 500 ml |
|         | <b>BRILLIANCE CLEANER L91</b> is for removal of stains, heel marks and dirty wax/polish films on all solvent-resistant surfaces; for basic and intermediate cleaning.                                                                                                                                                                                                                                                                                                                                                                                  | 48 months* | GH10    | -        | -                         | ZZ01-0000-0AA                                                |                          | 1 l VE10                                           | 300 x 1 l    |
|         | <b>BRILLIANCE ELASTICCLEANER</b> is a basic cleaner for removal of soilings, self-shine maintenance films, wax coats and residues of adhesives. By its gentle alkalinity and strong dissolving capacity, it is perfect for final cleaning and basic cleaning and for intensive cleaning prior to the basic application of AQUASEAL ELASTICSTAR or BRILLIANCE EVERCLEAR. Suitable for smooth or structured PVC, CV, linoleum, rubber/caoutchouc and PU/PUR/epoxy coated floor coverings or artificial and natural stone floors.                         | 24 months* | GG20    | -        | -                         | ZZ36-0000-0AA                                                |                          | 5 l                                                | 60 x 5 l     |
|         | <b>BRILLIANCE SPRAYMOP COMFORTCLEAN</b> is the ideal tool for the everyday cleaning of your premium hardwood-floor and other smooth surfaces. By its tank and spraying head, it offers now a very comfortable and also careful cleaning process without a frequent need to bend down. The high-quality manufactured mop and packaging offers in a set the BERGERTOOL SPRAYMOP COMFORTCLEAN including the tank and spraying equipment, the first cleaning pad and the first bottle of the mild ready-to-use cleaning product BRILLIANCE NEUTRALCLEANER. | -          | -       | -        | -                         | 1048-A00A +<br>ZZ29-0000-0AA<br><br>1049-A00A (Single Cover) |                          | Unit of 4<br>Sets<br>single<br><br>Single<br>Cover | 11 x VE4     |

# SPORT FLOOR SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!

## SPORT B

Since 1926, Berger-Seidle® has been offering globally leading wood and gym sport floor finishes. In 1959, Berger-Seidle® was the official supplier at the World Expo in Brussels. Today, gym floors all over the world are finished with Berger-Seidle® products.

Berger-Seidle® is known as a leading expert offering a complete range of finishing systems with all leading certifications (FIBA, DIN 18032, EN 14904) for your sport floor.

Enjoy both: The power of tradition and the innovative setup of our new SPORT B product family.

Benefit from the comfortable XXL sizes, customized for the perfect gym floor processing.

Berger-Seidle® SPORT B – Welcome to the Future!

The Champion since Generations!



# SPORT FLOOR SYSTEMS

**Berger-Seidle®**  
...wood floors deserve the best!



## Water-Based Systems

| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Shelf Life | Giscode | Dry Time   | Application / Consumption                                                                                                                            | Sheens / Color Shades / Art-No.                                                                                                                                            | Certificates / Approvals                                                              | Packaging                  | Pallet    |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------|-----------|
|    | <b>AQUACHOICE SPORT B SEALUP</b> is a highly elastic one-component waterborne wood floor sealer specially formulated to reduce sidebonding and panelization. The suitability for its purpose is evidenced by a test certificate as per MFMA. AQUACHOICE® SPORT B SEALUP is especially effective in coating wood installed over in-floor heating, floors with various types of floor movement and resisting high thermocycle expansion/contraction effects. AQUACHOICE® SPORT B SEALUP is recommended for upend strip flooring, wood paving, floating and plank floors.                                                                                            | 15 months* | W2+     | 1-2 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup>   | XG22-0000-0AA                                                                                                                                                              |    | 18,93 l                    | 22        |
|   | <b>AQUACHOICE SPORT B GREEN</b> is a two-component, high-wear waterborne finish. It represents the latest innovation in two-component water-based finishing, as its hardener is completely free of isocyanate. This special chemistry provides excellent chemical and abrasion resistance. The suitability for its purpose is evidenced by a test certificate as per DIN 18032-2; EN 14904, FIBA and MFMA. Due to its excellent resistances AQUACHOICE® SPORT B GREEN can also been used on heavy-traffic hardwood floors to which special requirements are made as to slip resistance. Outstanding is also the extremely long pot life of 18 hours after mixing. | 18 months* | W2+     | 3-4 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup>   | XS06-0000-2BK (MA)<br>XS06-0000-8BK (GL)                                                                                                                                   |    | 18,93 l                    | 22        |
|  | <b>AQUACHOICE SPORT B TWO</b> is a two-component, water-based hardwood-floor finish based on polyurethane especially for the use on sport floors. The suitability for its purpose is evidenced by a test certificate as per DIN 18032-2; Ö-Norm B 2608 ÖISS-Richtlinie 1990 and EN 14904, MFMA and FIBA. Due to its excellent resistances AQUACHOICE® SPORT B TWO can also been used on heavy-traffic hardwood floors to which special requirements are made as to slip resistance.                                                                                                                                                                               | 15 months* | W3/DD+  | 2 hrs.**   | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup> | XS02-0000-2CK (MA)<br>XS02-0000-3CK (SG)<br>XS02-0000-8CK (GL)                                                                                                             |  | 18,93 l<br>5,5 l           | 22<br>63  |
|  | <b>AQUACHOICE SPORT B MACH ONE</b> is a two-component, water-based wood floor finish designed for recoating gym floors in just a single coat. Due to its fast drying the gym can be used again after 24 hours. The incredibly high gloss and clarity of the coating promises a fantastic appearance of the floor.                                                                                                                                                                                                                                                                                                                                                 | 12 Monate* | -       | 12 hrs.**  | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup> | IT03-0000-08E (GL)                                                                                                                                                         |  | 18,93l + 7,57l<br>hardener | 14 + 14   |
|  | <b>AQUACHOICE SPORT B COLOR LINE PAINT</b> is a highly elastic one-component waterborne wood floor paint which is used for marking lines on hardwood floorings in sports halls.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 15 months* | W3+     | 12 hrs.**  | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup> | White / XP46-9010-02H<br>Black / XP46-9005-02H<br>Blue / XP46-5010-02H<br>Green / XP46-6010-02H<br>Orange / XP46-2004-02H<br>Yellow / XP46-1007-02H<br>Red / XP46-3000-02H |  | 3,79 l<br>1 l VE10         | 60<br>280 |

# SPORT FLOOR SYSTEMS



## Solvent-Based Systems

| Product | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Shelf Life | Giscode | Dry Time  | Application / Consumption                                       | Sheens / Color Shades / Art-No.                                                                                                                                            | Certificates / Approvals | Packaging          | Pallet    |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|-----------|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------|-----------|
|         | <b>OILCHOICE SPORT B POLY500</b> is a universally applicable 1-component oil modified urethane product using high quality modified natural oils. OILCHOICE SPORT B POLY 500 contains solvents and its binders are made from vegetable raw materials. This also applies to critical types of soil such as on edge lamella parquet, non-impregnated wood paving or planks, Parquet on underfloor heating and swinging structures in sports halls. OILCHOICE SPORT B POLY 500 has a low side-gluing effect and is great for any sport floor application. The suitability for its purpose is evidenced by a test certificate as per MFMA and FIBA. | 30 months* | KH1     | 48 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup> | KP67-0000-02B (MA)<br>KP67-0000-08B (GL)                                                                                                                                   |                          | 18,93 l            | 22        |
|         | <b>OILCHOICE SPORT B COLOR POLY LINE PAINT</b> is a one-component varnish based on quick-drying synthetic resins which is used for marking lines on hard-wood floorings in sports halls and for coloring sports hall finishes.                                                                                                                                                                                                                                                                                                                                                                                                                 | 24 months* | KH1     | 12 hrs.** | <br>Micro. Roller /<br>Univers. Roller<br>100 ml/m <sup>2</sup> | White / KP15-9010-04G<br>Black / KP15-9005-04G<br>Blue / KP15-5010-04G<br>Green / KP15-6010-04G<br>Orange / KP15-2004-04G<br>Yellow / KP15-1007-04G<br>Red / KP15-3000-04G |                          | 3,79 l<br>1 l VE10 | 63<br>280 |

## Maintenance & Care Systems

| Product | Description                                                                                                                                                                                                                                                                                                           | Shelf Life | Giscode | Dry Time | Application / Consumption                                 | Sheens / Color Shades / Art-No.                          | Certificates / Approvals | Packaging           | Pallet                |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|----------|-----------------------------------------------------------|----------------------------------------------------------|--------------------------|---------------------|-----------------------|
|         | <b>BRILLIANCE EVERCLEAR</b> is a polish-free, slip resistant care product for finished wood surfaces, cork, plastics and linoleum used undiluted or admixed to cleaning water. The glossy version is certified according DIN 18032 for sport arenas and gyms. Thus, it also covers the former product version „STOP“. | 24 months* | GE10    | -        | CARE APPLICATOR<br>30-40 ml/m <sup>2</sup><br>(Undiluted) | gloss<br>ZX02-S000-0AO<br><br>mat/satin<br>ZX02-0000-03A |                          | 5 l<br>1 l VE10     | 96 x 5 l<br>280 x 1 l |
|         | <b>BRILLIANCE CLEANER L94</b> is a strong basic cleaner for removal of heavy dirt and old, dirty maintenance layers on finished wood floors. It can be used pure or diluted with cleaning water. It is designed for solvent-resistant, finished surfaces, manually or by cleaning machines.                           | 48 months* | GU50    | -        | Cloth / Rag<br>20 ml/m <sup>2</sup><br>(Undiluted)        | ZZ09-S000-0AA                                            |                          | 5 l Set<br>1 l VE10 | 60 x 5 l<br>280 x 1 l |
|         | <b>BRILLIANCE NEUTRALCLEANER</b> is a concentrated cleaning product for easier dirt removal. It can be used on oiled, oiled/waxed and finished floors. Usage in conjunction with the BERGERTOOL SPRAYMOP COMFORTCLEAN as well as separately is recommended.                                                           | 24 months* | GU50    | -        | BRILLIANCE SPRAY-MOP<br>COMFORTCLEAN                      | ZZ29-0000-0AA                                            |                          | 5 l Set<br>1 l VE10 | 60 x 5 l<br>280 x 1 l |

## BERGERTOOL

By using the premium finishing products by Berger-Seidle, the right decision is made for a high-end quality floor offering numerous functional and creative options.

In the same way, using the right and tested premium tools are important to benefit from a safe application process. Berger-Seidle tools are carefully selected, tested, continuously controlled and customized for this perfect application.

The high quality of the tools support for instance the smooth leveling of a finish as well as fuzz-reduced rolling. Or they make sure, that the product is applied in the right quantity range according norms and datasheets. A perfection that pays off quickly.

Thus, the tools complete the finished, oils or adhesives in an ideal way. A plus in terms of comfort, safety and beauty of the floor. Very popular and highly requested helpers for the everyday business.

Valuable premium helpers for a perfect work in all situations.



# WORK TOOLS




| Product | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Type / Size /Art-No.                                                                           |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|         | <b>BRILLIANCE SPRAYMOP COMFORTCLEAN</b> is the ideal tool for the everyday cleaning of your premium hardwood-floor and other smooth surfaces. By its tank and spraying head, it offers now a very comfortable and also careful cleaning process without a frequent need to bend down. The high-quality manufactured mop and packaging offers in a set the BERGERTOOL SPRAYMOP COMFORTCLEAN including the tank and spraying equipment, the first cleaning pad and the first bottle of the mild ready-to-use cleaning product BRILLIANCE NEUTRALCLEANER. | Unit of 4 Sets<br>single<br><br>1048 A00A +<br>ZZ29 000A AF10<br><br>Single Cover<br>1049 A00A |
|         | <b>BERGERTOOL UNIVERSAL ROLLER</b> is the universally usable roller, suited for all types of hardwood-floor finishes (without frame).                                                                                                                                                                                                                                                                                                                                                                                                                  | Unit of 10 pieces<br>Nylon<br>25 cm<br>1004 A00A                                               |
|         | <b>BERGERTOOL UNO ROLLER</b> is our special low lint roller with 15 mm shearing length; for application of material of up to 180ml/m <sup>2</sup> (without frame).                                                                                                                                                                                                                                                                                                                                                                                     | Unit of 10 pieces<br>Nylon, 25 cm<br>1005 A00A                                                 |
|         | <b>BERGERTOOL MICRO FIBRE ROLLER</b> is our micro fibre roller (without frame). 8 mm Flor                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Unit of 10 pieces<br>Microfibre<br>25 cm<br>1012 A00A                                          |
|         | <b>BERGERTOOL MICRO FIBRE ROLLER PLUS</b> is our mirco fibre roller with stronger web for higher material quantity carrying (without frame), 11 mm                                                                                                                                                                                                                                                                                                                                                                                                     | Unit of 10 pieces<br>Microfibre<br>25 cm<br>1077 A00A                                          |
|         | <b>BERGERTOOL MICRO FIBRE ROLLER PLUS SMALL</b> is our small version for edge treatment of our mirco fibre roller with stronger web for higher material quantity carrying (without frame), 11 mm                                                                                                                                                                                                                                                                                                                                                       | Unit of 10 pieces<br>Microfibre<br>10 cm<br>1078 A00A                                          |
|         | <b>BERGERTOOL MICROFASERROLLE ULTRASLIM</b> is the perfect roller for thin applications and layers, for special cases such as AQUASEAL NORDICWHITE the perfect match, 5mm.                                                                                                                                                                                                                                                                                                                                                                             | Unit of 10 pieces<br>Microfibre<br>25 cm<br>1147 A00A                                          |
|         | <b>BERGERTOOL MICROFASERROLLE ULTRASLIM S</b> is the smaller 10cm version of our micro fibre roller ULTRASLIM, 5mm.                                                                                                                                                                                                                                                                                                                                                                                                                                    | Unit of 10 pieces<br>Microfibre<br>10 cm<br>1148 A00A                                          |
|         | <b>BERGERTOOL MICROFASERROLLE DELUXE</b> is our premium roller, offering a super compact and high quality micro fibre material and specially treated edges.                                                                                                                                                                                                                                                                                                                                                                                            | Unit of 10 pieces<br>Microfibre<br>25 cm<br>1080 A00A                                          |
|         | <b>BERGERTOOL FOAM ROLLER</b> is a roller made of foam (without frame).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Unit of 10 pieces<br>Foam<br>25 cm<br>1007 A00A                                                |
|         | <b>BERGERTOOL ROLLER TELESCOPE</b> , variable from 120-250 cm for BergerTool Roller Frame, with anti-fall protection and threaded holder for additional tools.                                                                                                                                                                                                                                                                                                                                                                                         | 1003 A00A                                                                                      |

| Product | Description                                                                                                                                                                           | Type / Size /Art-No.                                                                                                          |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
|         | <b>BERGERTOOL ROLLER FRAME</b> is our universal roller frame for all 25 cm Berger-Seidle rollers.                                                                                     | Metal<br>25 cm<br>1009 A00A                                                                                                   |
|         | <b>BERGERTOOL ROLLER FRAME SMALL</b> is our small roller frame for the BergerTool Mirco Fibre Roller Plus Small.                                                                      | Metal<br>10 cm<br>1079 A00A                                                                                                   |
|         | <b>BERGERTOOL APPLICATIONGUN</b><br>Size M 40cm/15,75":<br>For the application of FlexFill cartridges<br><br>Size L 60cm/23,62":<br>For the application of 20oz adhesive tubular bags | M<br>1214 A00A<br><br>L<br>1146 A00A                                                                                          |
|         | <b>BERGERTOOL APPLICATIONGUN HOLDINGCAP</b>                                                                                                                                           | 1401 A00A                                                                                                                     |
|         | <b>BERGERTOOL SAUSAGE TIP</b>                                                                                                                                                         | VE à 700 Pieces<br>1145 A00A                                                                                                  |
|         | <b>BERGERTOOL FILTER</b>                                                                                                                                                              | VE à 450 Pieces<br>1015 A00A                                                                                                  |
|         | <b>BERGERTOOL CARE APPLICATOR</b> is the ideal tool, inclusive of cover, for uniform application of BRILLIANCE EVERCLEAR®. Telescope version.                                         | Care Applicator with<br>Cover<br>1050 A00A<br><br>Single Cover<br>1051 A00A                                                   |
|         | <b>BERGERTOOL BROAD BRUSH</b> is our universal broad brush with frame.                                                                                                                | 20 cm<br>1010 A00A<br><br>30 cm<br>1011 A00A                                                                                  |
|         | <b>BERGERTOOL UNIVERSAL TROWEL</b> is a stainless-steel trowel, with round edges.                                                                                                     | Unit of 6 pieces<br>single<br><br>1030 A009<br>(sharp edges)<br>1030 A00A<br>(round edges)                                    |
|         | <b>BERGERTOOL TOOTHED TROWEL</b> is our toothed trowel for application of BERGERBOND hardwood-floor adhesives; available in different toothings.                                      | Unit of 10 pieces<br><br>A2, 1068 A00A<br>B1, 1069 A00A<br>B3, 1052 A00A<br>B7, 1053 A00A<br>B11, 1054 A00A<br>B15, 1059 A00A |

# WORK TOOLS



| Product                                                                                                                                                                    | Description                                                                                                                                                                                                                                                                                                                                                 | Type / Size /Art-No.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                           | <b>BERGERTOOL UNIVERSAL BRUSH</b> is our universal high-quality brush with extra-long handle.                                                                                                                                                                                                                                                               | stainless-steel<br>75 mm                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                             | 1058 A00A                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                           | <b>BERGERTOOL SMARTREPAIR SET</b><br>The perfect, compact all inclusive repair set to repair or heal surface scratches and damages. Suitable for finished and impregnated wooden surfaces.                                                                                                                                                                  | 1170 A00A                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                                                                                                            | <b>BERGERTOOL SMARTREPAIR WAXREFILL</b><br>Refill Sticks in all colors, sets of 2 pieces                                                                                                                                                                                                                                                                    | Unit of 2 pieces                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <br> | <b>BT SMARTREPAIR BLADE</b><br>Fine whetted blade to smoothen the healed area.                                                                                                                                                                                                                                                                              | Black 1174 A00A<br>Blue 1175 A00A<br>Green 1176 A00A<br>Red 1177 A00A<br>Yellow 1178 A00A<br>White 1179 A00A<br>Wenge / Smoked oak 1180 A00A<br>Doussie / Merbau / Pear 1181 A00A<br>Afromosia / Iroko / Jatoba 1182 A00A<br>Beech dark / Red Oak dark / Cherry / Alder 1183 A00A<br>Beech light / Red Oak light / Yew 1184 A00A<br>Oak dark 1185 A00A<br>Oak light / Chestnut 1186 A00A<br>Ash / Pine / Hard Maple 1187 A00A<br>Clear / Colorless 1188 A00A |
|                                                                                                                                                                            | <b>BT SMARTREPAIR EQUALIZER</b><br>Precision planer for perfect removal of overlappings.                                                                                                                                                                                                                                                                    | 1172 A00A<br>1173 A00A                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                                                                         | <b>BERGERTOOL MixBOX for finishing works</b><br>The transparent lacquering bucket is an optimal works aid. The scale makes easier the mixing of 2-component finishes in the ratios 10:1 of 20:1; it is suitable for smaller quantities too. The BERGERTOOL MixBOX is designed such that the roller may stay in the bucket with the lid closed nevertheless. | 15 l<br>1033 A00A                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                                                                                                            | <b>One-Way-Bag for BERGERTOOL MixBox</b><br>The fitting bag for our BERGERTOOL MixBox; used in absolutely all cases when working with solvent-based products.                                                                                                                                                                                               | 1041 A00A                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                         | <b>BERGERTOOL MixBOTTLE</b> is the ideal tool for filling and mixing 1K and 2K products.                                                                                                                                                                                                                                                                    | 1 l<br>1134 A00A                                                                                                                                                                                                                                                                                                                                                                                                                                             |

| Product                                                                                                                                                                                                                                                                                                                                                  | Description                                                                          | Type / Size /Art-No.   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------|
| <br><br><br> | <b>BERGERTOOL APPLICATOR</b><br>(without stick)                                      | 50 cm<br>1133 A00A     |
|                                                                                                                                                                                                                                                                                                                                                          | <b>BERGERTOOL PADHOLDER EASY</b> 115x230<br><b>BERGERTOOL PADHOLDER ERGO</b> 115x230 | 1130 A00A<br>1131 A00A |
|                                                                                                                                                                                                                                                                                                                                                          | <b>BERGERTOOL PADHOLDER ERGO STIEL</b> Telescope, variable from 100-180 cm           | 1132 A00A              |



# WORK AIDS



| Product | Description                                                                                                                                                     | Type / Size /Art-No.                   |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
|         | <b>BERGERTOOL LAYERGAUGE PRO</b> is a professional layer thickness measuring tool. It measures layer thicknesses of dried coats/finishes on the substrate wood. | 1140A00A (set)                         |
|         | <b>BERGERTOOL LAYERGAUGE GEL</b> is a refilling bottle for the BERGERTOOL LAYERGAUGE PRO.                                                                       | 1144A00A                               |
|         | <b>BERGERTOOL COATCONTROLLER</b> is our practical gauge for measuring the layer thickness while applying material.                                              | 82 x 57 x 1 mm<br>1260A00A             |
|         | <b>BERGERTOOL POWEROPENER</b> is our practical tool for effortlessly opening canisters.                                                                         | 160 x 70 x 10 mm<br>1261A00A           |
|         | <b>BERGERTOOL STRIKER</b> is our tool for depleting aluminium bags.                                                                                             | 225 x 105 mm<br>1264A00A               |
|         | <b>BERGERTOOL ROLLER CLEANER JS</b> is a practical tool for cleaning rollers.                                                                                   | 265 x 75 mm<br>1267A00A                |
|         | <b>BERGERTOOL POLISHING CLOTH</b> is ideal for polishing of oiled surfaces.                                                                                     | Bag of 100 Pieces<br>1074 A00A         |
|         | <b>BERGERTOOL PERAVLIES</b> is our decoupling fleece, with tape measure, 250 g/m <sup>2</sup> , size per roll 1 m x 50 m, 12 rolls per pallet.                  | Roll of 50 m <sup>2</sup><br>1113 A00A |
|         | <b>BERGERTOOL CLEAN &amp; GO</b> are universal cleaning tissues                                                                                                 | Can of 80 tissues<br>1106 A00A         |

| Product | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Type / Size /Art-No.                                                                   |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
|         | <b>BERGERTOOL SMARTCORD</b> is a closed-cell polyethylene-foam cord for filling wide expansion joints; prevents bonding of BERGERTOOL FLEXFILL COLOR in three directions.                                                                                                                                                                                                                                                                                                                                                      | Ø 8 mm (L)<br>1469 A00A<br>(bag of 30m)<br><br>Ø 6 mm (M)<br>1470 A00A<br>(bag of 30m) |
|         | <b>BERGER-SEIDLE® SYSTAINER®</b><br><b>MINI</b> , empty, for example for business cards<br>Outside H 3,2 x B 10,4 x T 6,7 cm<br>Inside H 2,3 x B 9,9 x T 27,3 cm<br>Weight 42 g                                                                                                                                                                                                                                                                                                                                                | 1216A00A                                                                               |
|         | <b>SMALL</b> , empty, with foam for Sample Set<br><b>SMALL</b> , empty, with foam for 0,125l Sample Cans<br>Outside H 10,5 x B 39,6 x T 29,6 cm<br>Inside H 7,5 x B 38,3 x T 27,3 cm<br>Weight 1,30 kg                                                                                                                                                                                                                                                                                                                         | 1208A00A<br>1219A00A                                                                   |
|         | <b>LARGE</b> , empty<br>Outside H 42 x B 39,6 x T 29,6 cm<br>Inside H 38,4 x B 38,1 x T 26,5 cm<br>Weight 3,10 kg                                                                                                                                                                                                                                                                                                                                                                                                              | 1023A00A                                                                               |
|         | <b>BERGER-SEIDLE® SYSTAINER® ROLL&amp;APPLY SET</b><br>The smart application set offers the perfect combination for an ideal workflow. The BERGER-SEIDLE SYSTAINER® MEDIUM is used for both transporting tools to the construction site and on site as an application and mix box, matched in size to rollers and applicators. The <b>tailormade bags</b> enable also long-term, clean work for each use. The roller base makes it easy to move and pull the set across the wood floor surface during the application process. | consisting of:<br>1299A00A +<br>1298A00A                                               |
|         | <b>BERGER-SEIDLE SYSTAINER® ROLLER</b><br>Outside H 15,9 x B 50,8 x T 39,6 cm<br>Weight 2,94 kg                                                                                                                                                                                                                                                                                                                                                                                                                                | 1263A00A<br><br>1299A00A                                                               |
|         | <b>MEDIUM</b> , empty<br>Outside H 23 x B 39,6 x T 29,6 cm<br>Inside H 22,2 x B 35,8 x T 22,1 cm<br>Weight 1,70 kg                                                                                                                                                                                                                                                                                                                                                                                                             | 1298A00A                                                                               |
|         | <b>BERGERTOOL ENTRANCESTOP</b><br>Information sign for doors about freshly finished surface, includes maintenance advices.                                                                                                                                                                                                                                                                                                                                                                                                     | 80 x 260 mm<br>100 Piece/VE<br><br>Version DE 1265A00A<br>Version EN 1266A00A          |

# BERGERSEIDLE COLLECTION



| Product                                                                             | Description                                               | Art-No. / Size                                                                                               |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
|    | <b>BERGER-SEIDLE® STRAUSS POLOSHIRT</b>                   | 1545 A00A S<br>1545 A00A M<br>1545 A00A L<br>1545 A00A XL<br>1545 A00A 2XL<br>1545 A00A 3XL                  |
|   | <b>BERGER-SEIDLE® STRAUSS T-SHIRT</b>                     | 1550 A00A S<br>1550 A00A M<br>1550 A00A L<br>1550 A00A XL<br>1550 A00A 2XL<br>1550 A00A 3XL                  |
|  | <b>BERGER-SEIDLE® STRAUSS FLEECE JACKET MOTION</b>        | 1540 A00A S<br>1540 A00A M<br>1540 A00A L<br>1540 A00A XL<br>1540 A00A 2XL<br>1540 A00A 3XL                  |
|  | <b>BERGER-SEIDLE® STRAUSS HOODED FLEECE JACKET MOTION</b> | 1535 A00A S<br>1535 A00A M<br>1535 A00A L<br>1535 A00A XL<br>1535 A00A 2XL<br>1535 A00A 3XL<br>1535 A00A 4XL |
|  | <b>BERGER-SEIDLE® STRAUSS JACKET ISOCELL DYNASHILD</b>    | 1510 A00A XS<br>1510 A00A S<br>1510 A00A M<br>1510 A00A L<br>1510 A00A XL<br>1510 A00A 2XL<br>1510 A00A 3XL  |

| Product                                                                               | Description                                                           | Art-No. / Size                                                                                                                                                 |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <b>BERGER-SEIDLE® STRAUSS SOFTSHELL JACKET MOTION BLACK</b>           | 1505 A00A XS<br>1505 A00A S<br>1505 A00A M<br>1505 A00A L<br>1505 A00A XL<br>1505 A00A 2XL<br>1505 A00A 3XL<br>1505 A00A 4XL<br>1505 A00A 5XL<br>1505 A00A 6XL |
|   | <b>BERGER-SEIDLE® STRAUSS SOFTSHELL JACKET MOTION BLUE</b>            | 1525 A00A XS<br>1525 A00A S<br>1525 A00A M<br>1525 A00A L<br>1525 A00A XL<br>1525 A00A 2XL<br>1525 A00A 3XL<br>1525 A00A 4XL<br>1525 A00A 5XL                  |
|  | <b>BERGER-SEIDLE® STRAUSS 3 IN 1 FUNCTIONAL JACKET MOTION</b>         | 1530 A00A XS<br>1530 A00A S<br>1530 A00A M<br>1530 A00A L<br>1530 A00A XL<br>1530 A00A 2XL<br>1530 A00A 3XL<br>1530 A00A 4XL<br>1530 A00A 5XL                  |
|  | <b>BERGER-SEIDLE® STRAUSS HYBRID HOODED KNITTED JACKET MOTION TEN</b> | 1515 A00A XS<br>1515 A00A S<br>1515 A00A M<br>1515 A00A L<br>1515 A00A XL<br>1515 A00A 2XL<br>1515 A00A 3XL<br>1515 A00A 4XL                                   |

# BERGERSEIDLE COLLECTION



| Product                                                                            | Description                                               | Art-No. / Size |
|------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
|   | <b>BERGER-SEIDLE® STRAUSS SOFTSHELL BODYWARMER MOTION</b> | 1560 A00A XS   |
|                                                                                    |                                                           | 1560 A00A S    |
|  | <b>BERGER-SEIDLE® STRAUSS TROUSERS MOTION</b>             | 1560 A00A M    |
|                                                                                    |                                                           | 1560 A00A L    |
|                                                                                    |                                                           | 1560 A00A XL   |
|                                                                                    |                                                           | 1560 A00A 2XL  |
|                                                                                    |                                                           | 1560 A00A 3XL  |
|                                                                                    |                                                           | 1560 A00A 4XL  |
|                                                                                    |                                                           | 1560 A00A 5XL  |
|                                                                                    |                                                           |                |
|  | <b>BERGER-SEIDLE® STRAUSS TROUSERS MOTION</b>             | 1500 A00A 23   |
|                                                                                    |                                                           | 1500 A00A 24   |
|                                                                                    |                                                           | 1500 A00A 25   |
|                                                                                    |                                                           | 1500 A00A 26   |
|                                                                                    |                                                           | 1500 A00A 27   |
|                                                                                    |                                                           | 1500 A00A 28   |
|                                                                                    |                                                           | 1500 A00A 29   |
|                                                                                    |                                                           | 1500 A00A 40   |
|                                                                                    |                                                           | 1500 A00A 42   |
|                                                                                    |                                                           | 1500 A00A 44   |
|                                                                                    |                                                           | 1500 A00A 46   |
|                                                                                    |                                                           | 1500 A00A 48   |
|                                                                                    |                                                           | 1500 A00A 50   |
|                                                                                    |                                                           | 1500 A00A 52   |
|                                                                                    |                                                           | 1500 A00A 54   |
|                                                                                    |                                                           | 1500 A00A 56   |
|                                                                                    |                                                           | 1500 A00A 58   |
|                                                                                    |                                                           | 1500 A00A 60   |
|                                                                                    |                                                           | 1500 A00A 62   |
|                                                                                    |                                                           | 1500 A00A 64   |
|                                                                                    |                                                           | 1500 A00A 66   |
|                                                                                    |                                                           | 1500 A00A 88   |
|                                                                                    |                                                           | 1500 A00A 90   |
|                                                                                    |                                                           | 1500 A00A 94   |
|                                                                                    |                                                           | 1500 A00A 98   |
|                                                                                    |                                                           | 1500 A00A 102  |
|                                                                                    |                                                           | 1500 A00A 106  |
|                                                                                    |                                                           | 1500 A00A 110  |
|                                                                                    |                                                           | 1500 A00A 114  |

| Product                                                                              | Description                                    | Art-No. / Size |
|--------------------------------------------------------------------------------------|------------------------------------------------|----------------|
|   | <b>BERGER-SEIDLE® STRAUSS SHORTS MOTION</b>    | 1520 A00A 40   |
|                                                                                      |                                                | 1520 A00A 42   |
|  | <b>BERGER-SEIDLE® STRAUSS ZIP off TROUSERS</b> | 1520 A00A 44   |
|                                                                                      |                                                | 1520 A00A 46   |
|                                                                                      |                                                | 1520 A00A 48   |
|                                                                                      |                                                | 1520 A00A 50   |
|                                                                                      |                                                | 1520 A00A 52   |
|                                                                                      |                                                | 1520 A00A 54   |
|                                                                                      |                                                | 1520 A00A 56   |
|                                                                                      |                                                | 1520 A00A 58   |
|                                                                                      |                                                | 1520 A00A 60   |
|                                                                                      |                                                | 1520 A00A 62   |
|                                                                                      |                                                |                |
|                                                                                      |                                                |                |
|                                                                                      |                                                |                |
|  | <b>BERGER-SEIDLE® STRAUSS ZIP off TROUSERS</b> | 1555 A00A 25   |
|                                                                                      |                                                | 1555 A00A 26   |
|                                                                                      |                                                | 1555 A00A 27   |
|                                                                                      |                                                | 1555 A00A 28   |
|                                                                                      |                                                | 1555 A00A 44   |
|                                                                                      |                                                | 1555 A00A 46   |
|                                                                                      |                                                | 1555 A00A 48   |
|                                                                                      |                                                | 1555 A00A 50   |
|                                                                                      |                                                | 1555 A00A 52   |
|                                                                                      |                                                | 1555 A00A 54   |
|                                                                                      |                                                | 1555 A00A 56   |
|                                                                                      |                                                | 1555 A00A 58   |
|                                                                                      |                                                | 1555 A00A 94   |
|                                                                                      |                                                | 1555 A00A 98   |
|                                                                                      |                                                | 1555 A00A 102  |
|                                                                                      |                                                | 1555 A00A 106  |

The workwear offered by Berger-Seidle corresponds to the premium quality produced by our partner STRAUSS and thus to the requirements and wishes of the market. If the workwear must meet special requirements or certifications for individual work use, this must be checked individually by the customer. Special certifications are not included. Ordered goods are non-returnable.


# BERGERSEIDLE COLLECTION



| Product                                                                             | Description                                                                                                                                                                                                                                                                                                                                         | Art-No. / Size                            |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
|    | <b>BERGERSEIDLE® SALES PRESENTER</b> is an attractive sales presenter in blue, with 4 levels, for our range of cleaning and care products. It offers 4 levels for our maintenance and care products. Attracting and supporting after sales marketing.                                                                                               | H 240 cm x B 62 cm x T 35 cm<br>1090 A00A |
|   | <b>BERGERSEIDLE® BANNER</b> depicting the Berger-Seidle product and families. Motive and design for choice: AQUASEAL® CERAMICSTAR, AQUASEAL® GREENSTAR, AQUASEAL® ELASTICSTAR, AQUASEAL® PAK STOP, BERGERBOND® M1, BRILLIANCE EVERCLEAR, CLASSIC BASEOIL or NATURALWHITE. Banners available in two variants: for hanging and standing presentation. | 80 x 200 cm                               |
|  | <b>BERGERSEIDLE FLAG</b> with Berger-Seidle depiction. Suitable for use indoors or outdoors. Available with or without holding arm.                                                                                                                                                                                                                 | 150 x 400 cm                              |
|                                                                                     | with holding arm                                                                                                                                                                                                                                                                                                                                    | 1192 A00A                                 |
|                                                                                     | without holding arm                                                                                                                                                                                                                                                                                                                                 | 1193 A00A                                 |
|  | <b>BERGERSEIDLE® FOLDINGRULE</b><br>Classic folding rule with the Berger-Seidle logo                                                                                                                                                                                                                                                                | 2 m<br>1281A00A                           |
|  | <b>BERGERSEIDLE® FLOORY</b><br>mascot parrot                                                                                                                                                                                                                                                                                                        | 18 cm<br>1249 A00A                        |
|  | <b>BERGERSEIDLE® MULTIPEN DELUXE</b><br>Pen, centimetre/inch ruler, 1:20/1:50 scale, spirit level, slotted/crosshead screwdriver                                                                                                                                                                                                                    | Blue<br>1139 A00A                         |
|  | <b>BERGERSEIDLE® CARPENTER'S PENCIL</b><br>Classic carpenter's pencil with logo from Berger-Seidle                                                                                                                                                                                                                                                  | 1189 A00A                                 |
|  | <b>BERGERSEIDLE® LANYARD</b><br>Classic lanyard with logo from Berger-Seidle                                                                                                                                                                                                                                                                        | 55 x 2 cm<br>1280A00A                     |

| Product                                                                              | Description                                                                                                     | Art-No. / Size                      |
|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------|
|   | <b>BERGERSEIDLE® DUBBEGLAS</b><br>Traditional jar of the region by Berger-Seidle.                               | 0,5 Liter (Large)<br>1162 A00A      |
|                                                                                      |                                                                                                                 | 0,25 Liter (Small)<br>1161 A00A     |
|                                                                                      | <b>BERGERSEIDLE® STEIN</b><br>Traditional pitcher of the region by Berger-Seidle.                               | (0,5 Liter)<br>1163 A00A            |
|   | <b>BERGERSEIDLE® STICKER</b><br>40x15 cm (VE à 1 Pieces)<br>20x 7 cm (VE à 4 Pieces)<br>10x4 cm VE à 14 Pieces) | 1165 A00A<br>1166 A00A<br>1196 A00A |
|  | <b>BERGERSEIDLE® BAG</b><br>white<br>blue                                                                       | 1169 A00A<br>1168 A00A              |

Connect with Floory  
on Instagram  
and have fun



LEGEND

Explanation of icons and symbols

- \*

Storage time information: These are the minimum storage periods, to be counted as from delivery date ex works, if storage and transport is done correctly according MSDS/TDS in unopened original container. Please refer to current data sheets and instructions!
- \*\*

All drying times stated are approx. values based on standard atmosphere acc. to DIN 50014: 23°C/50% air humidity and normal coating thickness. Please note that unsufficient ventilation, lower temperatures, higher air humidity or an increased layer thickness may delay drying considerably.
- \*\*\*

These articles are excluded from discounts.
- \*\*\*\*

Consumptions values are rough value per layer and vary depending on usage, personal workflow and wood species. The values are supposed to help for order quantity calculations. Please also not the traffic table on page 97. The recommended tools represent the globally preferred and most usual ones. Many other tools for application are possible according the individual product data sheet, or after personal single case testing.
-  This product is not always in stock. Please be prepared for delivery times of at least 20 to 25 working days.
-  EC1 marking as per GEV-EMICODE: classification "very low emission" / EC1 plus is even significantly lower in emissions
-  All products marked with this sign possess the General Building Inspectorate Approval issued by DiBt. The approvals' text and the possibilities how to combine the products can be found on and downloaded from the product pages in the web.
-  This product is part of the German waste recycling system "The green point" and thus supports the protection of the environment and sustainability.
-  Conformity mark of the American Maple Flooring Manufacturers Association
-  EU Ecolabel environmental label (<https://eu-ecolabel.de/>)
-  Environmental label of the Swiss Color Foundation
-  Blue Angel [www.blauer-engel.de/uz113](http://www.blauer-engel.de/uz113) (classification for very low emission)
-  Finnish emissions label for building products and furniture
-  t-bar - recommended

 stainless trowel - recommended

 roller - recommended

 brush - recommended

 paint brush - recommended

 toothed trowel - recommended
-  t-bar - possible

 stainless trowel - possible

 roller - possible






 brush - possible

 paint brush - possible

 toothed trowel - possible

MAINTENANCE & CARE GUIDE

This overview shows you which cleaning and care products you will need

| Kind of surface                                                                                                                                                         | Lacquered hardwood floor                                                                                                                                                                | Impregnated/oiled/waxed hardwood floor                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Initial and full care</b><br>Is done after the floor coating has dried, after about 8–10 days, but always before the first intensive use<br><br>Quantity needed      | <b>BRILLIANCE EVERCLEAR</b><br>Apply undiluted<br><br>30-40 ml/sqm                                   | <b>BRILLIANCE AQUASATINPOLISH / BRILLIANCE OILCARE</b><br>Apply undiluted<br><br>30-40 ml/sqm // 5-20 ml/sqm                 |
| <b>Routine cleaning</b><br><br>The dirt is removed. The cleaning product is added to the mopping water / used undiluted. Mop the floor fog-damp!<br><br>Quantity needed | <b>BRILLIANCE NEUTRALCLEANER / BRILLIANCE CLEANER L94</b><br>diluted<br><br>300 ml / 10 ltr of water | <b>BRILLIANCE NEUTRALCLEANER / BRILLIANCE BIOSOAP</b><br>diluted<br><br>300 ml / 10 ltr of water // 100 ml / 10 ltr of water |
| <b>Routine care</b><br><br>The care film is replenished. The care agent is added to the mopping water. Mop the floor fog-damp!<br><br>Quantity needed                   | <b>BRILLIANCE EVERCLEAR</b><br>Diluted<br><br>300 ml / 10 ltr Wasser                               | <b>BRILLIANCE AQUASATINPOLISH / AQUAOILCARE</b><br>Diluted<br><br>300 ml / 10 ltr of water                                 |
| <b>Basic Cleaning</b><br><br>The dirty care film is removed. Apply the mixture, let it react, remove the partially dissolved care film.<br><br>Quantity needed          | <b>BRILLIANCE CLEANER L94</b><br>Undiluted / diluted<br><br>1 ltr / 1 ltr of water                 | <b>BRILLIANCE BIOSOAP</b><br>Diluted<br><br>1 ltr / 4 ltr of water                                                         |

Please refer to the detailed information on the cans, in the Technical Data Sheets as well as on the further developing instructions and information documents on cleaning and caring.

Important advice!

The room climate ideally should be 18-20°C at 50-60% RH, this way excessive gaping (back drying) can be avoided. Dust and loose dirt can be removed drily using a soft cloth, a suitable broom or vacuum cleaner. Do avoid scratches by removing the dirt regularly and gently as well as by using felt pads under the furniture or suitable chair casters. Please take into account that when cleaning the hardwood-floor with liquids the cleaning cloth should be not more than fog-damp. Too much water results in unnecessary swelling of the wood, and if you "water" your floor repeatedly it may get damaged. How often the floor needs to be cleaned essentially depends on its use. The following table shall be a guideline.

| Traffic exposure           | Moderate               | Medium                 | Heavy       |
|----------------------------|------------------------|------------------------|-------------|
| Initial care               | 1 x                    | 1 x                    | 1 x         |
| Routine cleaning, dry      | every day or as needed | every day or as needed | every day   |
| Routine cleaning, fog-damp | 8-14 days              | 2-4 days               | every day   |
| Maintenance care           | 2-3 x p.a.             | 4-6 x p.a.             | 8-12 x p.a. |
| Basic cleaning             | 1 x p.a.               | 2 x p.a.               | 4 x p.a.    |

Depending on the actual use of the hardwood-floor you will have to deviate from the intervals listed.

TABLES

BERGERBOND ADHESIVE SYSTEMS

| Wood type                      | BERGERBOND |    |     |     |
|--------------------------------|------------|----|-----|-----|
|                                | M1P        | M1 | M1X | P2S |
| mosaic parquet                 | ✓          | •  | •   | ✓   |
| upright slat parquet           | ✓          | •  | •   | ✓   |
| lam parquet                    | ✓          | •  |     | ✓   |
| strip parquet                  | ✓          | ✓  |     | ✓   |
| massive planks d≤22, l≤2200 mm | ✓          | ✓  |     | ✓   |
| massive planks größere Formate | ✓          | •  |     | ✓   |
| 2-layer parquet                | ✓          | ✓  | ✓   | •   |
| 3-layer parquet                | ✓          | ✓  | ✓   | •   |
| upright wood block paving RE   | ✓          | •  |     | ✓   |
| upright wood block paving WE   | ✓          | •  |     | ✓   |
| upright wood block paving GE   |            |    |     |     |

✓ recommended      • suitable      \* not to be combined with swelling-sensitive wood

COMBINATIONS OF PRIMERS AND ADHESIVES

| Adhesive \ Primer | BERGERBOND PRIMER D | BERGERBOND PRIMER E | BERGERBOND PRIMER P |
|-------------------|---------------------|---------------------|---------------------|
| BERGERBOND D1U    | ✓                   |                     |                     |
| BERGERBOND P2S    | ✓                   | ✓                   | ✓                   |
| BERGERBOND M1P    | ✓                   | ✓                   | ✓                   |
| BERGERBOND M1     | ✓                   | ✓                   | ✓                   |
| BERGERBOND M1X    | ✓                   | ✓                   | ✓                   |

✓ Combination possible

\* Please refer to the detailed use recommendations for the particular products in our current Technical Data Sheets.

SURFACE TREATMENT SYSTEMS

| Hardwood-floor finishes                                                        | Use-suitability                                                                                          |                                                                                                          |                                                                                                            |
|--------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
|                                                                                | normal<br>(e.g. private living areas etc.)                                                               | medium<br>(e.g. commercial areas, private offices etc.)                                                  | heavy<br>(e.g. kindergartens, schools, hospitals, offices etc.)                                            |
| Water-based Systems                                                            |                                                                                                          |                                                                                                          |                                                                                                            |
| AQUASEAL® GREENSTAR                                                            | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3x roller = 360-400 ml/m²                                                                             |
| AQUASEAL® ROYALMAT                                                             | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3 x roller = 360-400 ml/m²                                                                            |
| AQUASEAL® NATURALWHITE                                                         | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3 x roller = 360-400 ml/m²                                                                            |
| AQUASEAL® CERAMICSTAR                                                          | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3x roller = 360-400 ml/m²                                                                             |
| AQUASEAL® SMARTSTAR                                                            | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3x roller = 360-400 ml/m²                                                                             |
| AQUASEAL® ECOGOLD                                                              | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>4x roller mind. 360-400 ml/m²                                                                         |
| AQUASEAL® ECOSILVER                                                            | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3x roller = 360 ml/m²                                                                               | •<br>4x roller mind. 360-400 ml/m²                                                                         |
| AQUASEAL® SMARTHOME                                                            | ✓<br>2x trowel + 2x roller or 3x roller = 300 ml/m²                                                      | ✓<br>3x roller = 360 ml/m²                                                                               |                                                                                                            |
| Solvent-based Systems                                                          |                                                                                                          |                                                                                                          |                                                                                                            |
| SOLVSEAL LT EXPORT EXTRA nach DIN 18032                                        | ✓<br>2-3 x roller = 240–300ml/m²                                                                         | ✓<br>3 x roller = 300 ml/m²                                                                              | ✓<br>( 4 x roller = 400 ml/m² )                                                                            |
| Oil Systems                                                                    |                                                                                                          |                                                                                                          |                                                                                                            |
| CLASSIC BASEOIL                                                                | ✓<br>2 x trowel or 1 x roller until saturated, consumption subject to wood species, e.g. oak 20-50 ml/m² | ✓<br>2 x trowel or 1 x roller until saturated, consumption subject to wood species, e.g. oak 20-50 ml/m² | ✓<br>2-3 x trowel or 1 x roller until saturated, consumption subject to wood species, e.g. oak 20-50 ml/m² |
| CLASSIC 100ProOIL                                                              | ✓<br>2 x trowel until saturated, consumption subject to wood species, e.g. oak 20-50 ml/m²               | ✓<br>2 x trowel until saturated, consumption subject to wood species, e.g. oak 20-50 ml/m²               | ✓<br>2-3 x trowel until saturated, consumption subject to wood species, e.g. oak 20-50 ml/m²               |
| CLASSIC HARDOIL                                                                | ✓<br>2 x trowel or 2 x roller = 60-100 ml/m²                                                             | ✓<br>2 x roller = 120-200 ml/m²                                                                          | ✓<br>2 x roller = 200 ml/m²                                                                                |
| All oil systems with medium or heavy traffic need intensive care while in use! |                                                                                                          |                                                                                                          |                                                                                                            |

✓ recommended      • suitable

**Notation:**  
With all three traffic classes, the use of primers and of trowel-applied hardwood-floor finishes may make sense. In this case our products AQUASEAL FLEXPRIMER and AQUASEAL EXOBLOC will replace the first finishing coat. Please refer to the recommendations in our system guide and in our current Technical Data Sheets. In case solvent-containing products shall be used, there needs to be checked whether water-borne lacquer can be used instead (TRGS 617). The activities are to be performed in accordance with the rules of the trade, the state of the art and the applicable standards and regulations of the country in which the product is used.

TABLES

SKID RESISTANCES

| Skid resistance class acc. to DGUV<br>(German Social Accident Insurance)<br>regulation 108-003<br>(BGR 181) | R9 | R10 | R11 |
|-------------------------------------------------------------------------------------------------------------|----|-----|-----|
| Finish                                                                                                      |    |     |     |
| AQUASEAL® GREENSTAR                                                                                         | ✓  |     |     |
| AQUASEAL® GREENSTAR + AQUASEAL® ANTISLIP ADD                                                                |    | ✓   | ✓   |
| AQUASEAL® CERAMICSTAR                                                                                       | ✓  |     |     |
| AQUASEAL® CERAMICSTAR + AQUASEAL® ANTISLIP ADD                                                              |    | ✓   | ✓   |
| AQUASEAL® ROYALMAT                                                                                          | ✓  | ✓   |     |
| AQUASEAL® ROYALMAT + AQUASEAL® ANTISLIP ADD                                                                 |    |     | ✓   |
| AQUASEAL® NATURALWHITE                                                                                      | ✓  | ✓   |     |
| AQUASEAL® NATURALWHITE + AQUASEAL® ANTISLIP ADD                                                             |    |     | ✓   |
| AQUASEAL® ELASTICSTAR                                                                                       | ✓  |     |     |
| AQUASEAL® ELASTICSTAR + AQUASEAL® ANTISLIP ADD                                                              |    | ✓   |     |
| AQUASEAL® EcoGOLD                                                                                           | ✓  |     |     |
| AQUASEAL® EcoGOLD + AQUASEAL® ANTISLIP ADD                                                                  |    | ✓   |     |
| CLASSIC BASEOIL                                                                                             | ✓  | ✓   | ✓   |
| CLASSIC 100PROOIL                                                                                           | ✓  | ✓   |     |
| CLASSIC HARDOIL                                                                                             | ✓  | ✓   |     |

✓ Complies with the skid resistance class

USABILITIES OF ROLLERS

| Type of roller                                                                                      | Suitable for                                                                                                                   |
|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>BERGERTOOL UNIVERSAL ROLLER</b><br>Art.-No. 1004 A00A, Consumption approx. 100-120 g/m²          | All systems                                                                                                                    |
| <b>BERGERTOOL MICRO FIBRE ROLLER</b><br>Art.-No. 1012 A00A, Consumption approx. 50-100 g/m²         | Water-based coatings / CLASSIC BASEOIL                                                                                         |
| <b>BERGERTOOL MICRO FIBRE ROLLER DELUXE</b><br>Art.-No. 1080 A00A, Consumption approx. 100-130 g/m² | Water-based coatings                                                                                                           |
| <b>BERGERTOOL MICRO FIBRE ROLLER PLUS</b><br>Art.-No. 1077 A00A, Consumption approx. 100-120 g/m²   | Water-based coatings                                                                                                           |
| <b>BERGERTOOL ULTRASLIM</b><br>Art.-No. 1047 A00A, Consumption approx. 40-50 g/m                    | BERGERBOND PRIMER P / CLASSIC BASEOIL / CLASSIC 100PROOIL<br>CLASSIC HARDOIL / AQUASEAL® NORDICWHITE<br>AQUASEAL® NATURALWHITE |
| <b>BERGERTOOL UNO ROLLER</b><br>Art.-No. 1005 A00A, Consumption approx. 150-250 g/m²                | BERGERBOND PRIMER E / SOLVSEAL UNO Finish                                                                                      |
| <b>BERGERTOOL FOAM ROLLER</b><br>Art.-No. 1007 A00A, Consumption approx. 80-100 g/m²                | CLASSIC BASEOIL / BERGERBOND PRIMER P                                                                                          |

COMBINATIONS OF SEALERS AND FINISHES



|                                            | SOLVSEAL<br>UNIQUEPRIMER® | CLASSIC<br>BASEOIL | AQUASEAL®<br>NORDICWHITE | AQUASEAL®<br>EXOBLOC | AQUASEAL®<br>FLEXPRIMER | Primer |
|--------------------------------------------|---------------------------|--------------------|--------------------------|----------------------|-------------------------|--------|
| Finish                                     |                           |                    |                          |                      |                         |        |
| AQUASEAL® GREENSTAR                        | ✓                         | ✓                  | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® ROYALMAT                         | ✓                         | ✓                  | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® NATURALWHITE                     | ✓                         | ✓                  | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® CERAMICSTAR                      | ✓                         | ✓                  | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® SMARTSTAR                        | ✓                         | ✓                  | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® EcoGOLD                          | ✓                         | ✓                  | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® ECOSILVER                        |                           |                    | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® SMARTHOME                        |                           |                    | ✓                        | ✓                    | ✓                       |        |
| AQUASEAL® NORDICWHITE                      |                           | ✓                  | ✓                        | ✓                    | ✓                       |        |
| SOLVSEAL LT EXPORT EXTRA<br>acc. DIN 18032 | ✓                         | ✓                  |                          |                      |                         |        |
| CLASSIC BASEOIL                            |                           | ✓                  |                          |                      |                         |        |
| CLASSIC 100PROOIL                          |                           | ✓                  |                          |                      |                         |        |
| CLASSIC HARDOIL                            | ✓                         | ✓                  |                          |                      |                         |        |

✓ combination possible

\* Please refer to the detailed use recommendations for the particular products in our current Technical Data Sheets.

# ALPHABETIC PRODUCT LIST

|                                      |       |                                       |       |                                         |       |
|--------------------------------------|-------|---------------------------------------|-------|-----------------------------------------|-------|
| ABRAPRIME CERAMIC 3M CUBITRON        | 16-17 | BERGERSEIDLE® BAG                     | 97    | BERGERTOOL SMARTREPAIR SET              | 88    |
| ABRAPRIME CLEANING AND MAINTENANCE   | 30-31 | BERGERSEIDLE® BANNER                  | 96    | BERGERTOOL SMARTREPAIR WAXREFILL        | 88    |
| ABRAPRIME CORUNDUM                   | 22-23 | BERGERSEIDLE® CARPENTER'S PENCIL      | 96    | BERGERTOOL SMARTREPAIR BLADE            | 88    |
| ABRAPRIME ELASTIC FLOORS             | 32-33 | BERGERSEIDLE® DUBBEGLAS               | 97    | BERGERTOOL SMARTREPAIR EQUALIZER        | 88    |
| ABRAPRIME STAIRS, CORNERS AND OTHERS | 24-25 | BERGERSEIDLE® FLAG                    | 96    | BERGERTOOL STRIKER                      | 90    |
| ABRAPRIME SURFACE TREATMENT          | 26-29 | BERGERSEIDLE® FLOORY                  | 96    | BERGERTOOL UNIVERSAL BRUSH              | 88    |
| ABRAPRIME ZIRCON                     | 18-19 | BERGERSEIDLE® FOLDINGRULE             | 96    | BERGERTOOL UNIVERSAL ROLLER             | 86    |
| ABRAPRIME ZIRCONIA ALUMINA           | 20-21 | BERGERSEIDLE® LANYARD                 | 96    | BERGERTOOL UNIVERSAL TROWEL             | 87    |
|                                      |       | BERGERSEIDLE® MULTIPEN DELUXE         | 96    | BERGERTOOL UNO ROLLER                   | 86    |
| AQUACHOICE SPORT B COLOR LINE PAINT  | 80-81 | BERGERSEIDLE® SALES PRESENTER         | 96    | BERGERTOOL TOOTHEDTROWEL                | 87    |
| AQUACHOICE SPORT B GREEN             | 80-81 | BERGERSEIDLE® STEIN                   | 97    |                                         |       |
| AQUACHOICE SPORT B MACHONE           | 80-81 | BERGERSEIDLE® STICKER                 | 97    | BRILLIANCE AQUASATINPOLISH              | 74-75 |
| AQUACHOICE SPORT B SEALUP            | 80-81 | BERGERSEIDLE® STRAUSS COLLECTION      | 92-95 | BRILLIANCE AQUAOILCARE                  | 74-75 |
| AQUACHOICE SPORT B TWO               | 80-81 | BERGERSEIDLE® SYSTAINER               | 91    | BRILLIANCE BIOCLEAN                     | 72-75 |
|                                      |       |                                       |       | BRILLIANCE BIOSOAP                      | 74-75 |
| AQUASEAL® ANTISLIP ADD               | 50-51 | BERGERTOOL APPLICATOR                 | 89    | BRILLIANCE CLEANER L91                  | 76-77 |
| AQUASEAL® CERAMICSTAR                | 42-43 | BERGERTOOL APPLICATIONGUN             | 87    | BRILLIANCE CLEANER L94                  | 72-73 |
| AQUASEAL® ECOGOLD                    | 50-51 | BERGERTOOL BERGER-SEIDLE SYSTAINER®   | 87    | BRILLIANCE ELASTICCLEANER               | 76-77 |
| AQUASEAL® ECOSILVER                  | 50-51 | BERGERTOOL BROAD BRUSH                | 87    | BRILLIANCE EVERCLEAR                    | 72-73 |
| AQUASEAL® ELASTICSTAR                | 48-49 | BERGERTOOL CARE APPLICATOR            | 87    | BRILLIANCE FILLANDFINISH                | 76-77 |
| AQUASEAL® ELASTICSTAR COLOR          | 48-49 | BERGERTOOL CLEAN & GO                 | 90    | BRILLIANCE FITPOLISH                    | 74-75 |
| AQUASEAL® ELASTICSTAR COLOR CHIPS    | 48-49 | BERGERTOOL COATCONTROLLER             | 90    | BRILLIANCE NEUTRALCLEANER               | 72-75 |
| AQUASEAL® EXOBLOC                    | 42-43 | BERGERTOOL ENTRANCESTOP               | 91    | BRILLIANCE OILCARE                      | 74-75 |
| AQUASEAL® EXOBLOC TURBO              | 42-43 | BERGERTOOL FILTER                     | 87    | BRILLIANCE SPRAYMOP COMFORTCLEAN        | 76-77 |
| AQUASEAL® FLEXPRIMER                 | 42-43 | BERGERTOOL FOAM ROLLER                | 86    | BRILLIANCE STARTERSET1                  | 72-73 |
| AQUASEAL® GREENSTAR                  | 42-45 | BERGERTOOL LAYERGAUGE GEL             | 90    | BRILLIANCE STARTERSET2                  | 74-75 |
| AQUASEAL® LEVELGEL                   | 50-51 | BERGERTOOL LAYERGAUGE PRO             | 90    |                                         |       |
| AQUASEAL® NATURALWHITE               | 46-47 | BERGERTOOL MICRO FIBRE ROLLER         | 86    | CLASSIC 100PROOIL                       | 56-57 |
| AQUASEAL® NORDICWHITE                | 50-51 | BERGERTOOL MICRO FIBRE ROLLER DELUXE  | 86    | CLASSIC BASEOIL                         | 54-59 |
| AQUASEAL® PAFUDIMA FLEXFILL COLOR    | 36-41 | BERGERTOOL MICRO FIBRE ROLLER PLUS    | 86    | CLASSIC BASEOIL COLOR                   | 54-59 |
| AQUASEAL® PAFUKI                     | 36-37 | BERGERTOOL MICRO FIBRE ROLLER PLUS S  | 86    | CLASSIC BASEOIL COLOR Sample Box        | 55-57 |
| AQUASEAL® PAFUKIPOWDER COLOR         | 36-39 | BERGERTOOL MICRO FIBRE R. ULTRASLIM   | 86    | CLASSIC BASEOIL COLOR Sample Set        | 55-57 |
| AQUASEAL® PAK STOP                   | 36-39 | BERGERTOOL MICRO FIBRE R. ULTRASLIM S | 86    | CLASSIC BIOLAUGE                        | 56-57 |
| AQUASEAL® PINKQUALIZER               | 42-43 | BERGERTOOL MixBox                     | 88    | CLASSIC EXPRESSSTAIN COLOR              | 60-63 |
| AQUASEAL® RETARDER                   | 50-51 | BERGERTOOL MixBOTTLE                  | 88    | CLASSIC EXPRESSSTAIN COLOR Samp.Set     | 60-61 |
| AQUASEAL® ROYALMAT                   | 46-47 | BERGERTOOL PERAVLIES                  | 90    |                                         |       |
| AQUASEAL® SMARTHOME                  | 50-51 | BERGERTOOL POLISHING CLOTH            | 90    | CLASSIC HARDOIL                         | 56-57 |
| AQUASEAL® SMARTSTAR                  | 48-49 | BERGERTOOL PADHOLDER EASY             | 89    | CLASSIC OUTDOOROIL                      | 64-65 |
| AQUASEAL® SPORT                      | 48-49 | BERGERTOOL PADHOLDER ERGO             | 89    | CLASSIC OUTDOOROIL COLOR                | 64-65 |
| AQUASEAL® UV PLUS                    | 50-51 | BERGERTOOL PADHOLDER ERGO STIEL       | 89    | CLASSIC PLUS                            | 56-57 |
|                                      |       | BERGERTOOL POWEROPENER                | 87    |                                         |       |
| BERGERBOND COLORADD P                | 12-13 | BERGERTOOL ROLLER CLEANER JS          | 90    | OILCHOICE SPORT B POLY500               | 82-83 |
| BERGERBOND D1U                       | 10-11 | BERGERTOOL ROLLER FRAME               | 87    | OILCHOICE SPORT B COLOR POLY LINE PAINT | 82-83 |
| BERGERBOND M1                        | 10-11 | BERGERTOOL ROLLER FRAME SMALL         | 87    |                                         |       |
| BERGERBOND M1P                       | 8-9   | BERGERTOOL ROLLER TELESCOPE           | 86    | SOLVSEAL LT EXPORT EXTRA                | 66-67 |
| BERGERBOND M1U UP                    | 10-11 | BERGERTOOL SAUSAGE TIP                | 87    | SOLVSEAL PAFUKISUPER                    | 66-67 |
| BERGERBOND M1X                       | 8-9   | BERGERTOOL SMARTCORD                  | 91    | SOLVSEAL UNIQUICKPRIMER                 | 66-67 |
| BERGERBOND P2S                       | 8-9   |                                       |       |                                         |       |
| BERGERBOND P2 RAPIDREPAIR            | 12-13 |                                       |       |                                         |       |
| BERGERBOND PRIMER D                  | 8-9   |                                       |       |                                         |       |
| BERGERBOND PRIMER E                  | 8-9   |                                       |       |                                         |       |
| BERGERBOND PRIMER P                  | 8-9   |                                       |       |                                         |       |



Welcome and let us get connected and always stay updated!

About the listed products please refer to our actual technical data sheets and material safety data sheets. For information, test deliveries or quotes please contact:

1137 A00A  
 EN-2506-2-xc



Berger-Seidle GmbH  
 Parkettlacke • Klebstoffe • Bauchemie  
 Maybachstr. 2 • 67269 Grünstadt / Weinstraße • Germany  
[www.berger-seidle.de](http://www.berger-seidle.de) • [info@berger-seidle.de](mailto:info@berger-seidle.de)  
 Tel: +49 63 59 80 05-300 • Fax: +49 63 59 80 05-171

